

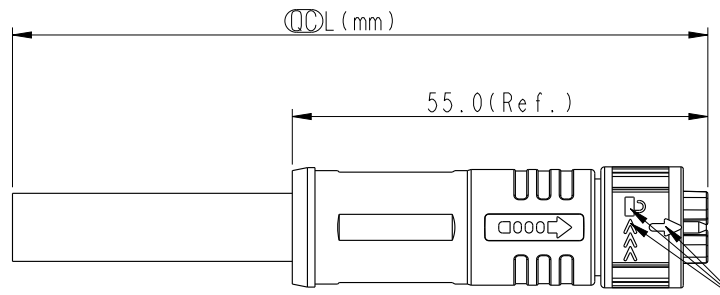



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION



White Printing \varnothing



- Note:
- * \varnothing Important Dimension To Check.
 - * Waterproof Rate: IP68, 1m/24H (Mated)
 - * Flame Class: UL94V-0 (UV Resistance)
 - * Housing: Thermoplastic, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * O-Ring: Rubber, Gray
 - * Rated Current: 3~5Pin 16A(630V)
 - * Cable Length Tolerance:
 - 01M: +50/-0mm
 - 02M~03M: +100/-0mm
 - 04M~05M: +150/-0mm
 - 06M~10M: ±100mm
 - 11M~20M: ±200mm
 - 21M~30M: ±300mm
 - 31M~99M: ±500mm

UNIT: mm			TITLE X-Lok A-Size Power Connector		
TOLERANCE ±0.5mm			SCALE 1:1	SIZE A4	SHEET 1 OF 2
REV. A	WC-REV. .0	\varnothing : Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Ouyang	DATE 2021-01-23
DWG NO. AG-XXBFGM-QL8GXX	CHECKED BY Jerry	DATE 2021-01-23
CUSTOMER ALTW	APPROVED BY Fred	DATE 2021-01-23

1 2 3 4 5 6 7 8

F


E

D

C

B

A

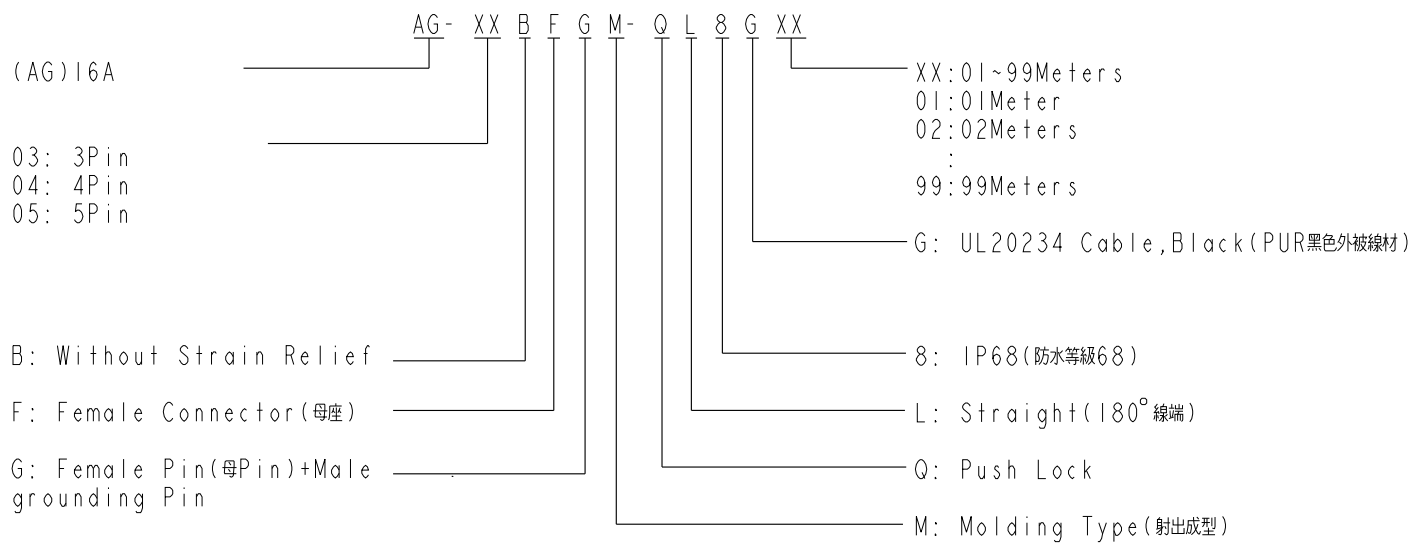

3pin	4pin	5pin
4 3 2 1 PE	4 3 2 1 PE	4 3 2 1 PE
- Red Brown - Yellow	- Red Brown Black Yellow	Orange Red Brown Black Yellow
Pin # Wire	Pin # Wire	Pin # Wire

UNIT:mm		TITLE
TOLERANCE		X-Lok A-Size Power Connector
±0.5mm		SCALE 1:1 SIZE A4 SHEET 2 OF 2
		REV. A WC-REV. .0
		QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
AG-XXBFGM-QL8GXX	Ouyang	2021-01-23
ALTW	Jerry	2021-01-23
	Fred	2021-01-23

1 2 3 4 5 6 7 8 W10814-03-001A2