

Customer Information Sheet

DRAWING No.: M80-707XXXX


IF IN DOUBT - ASK

©


NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

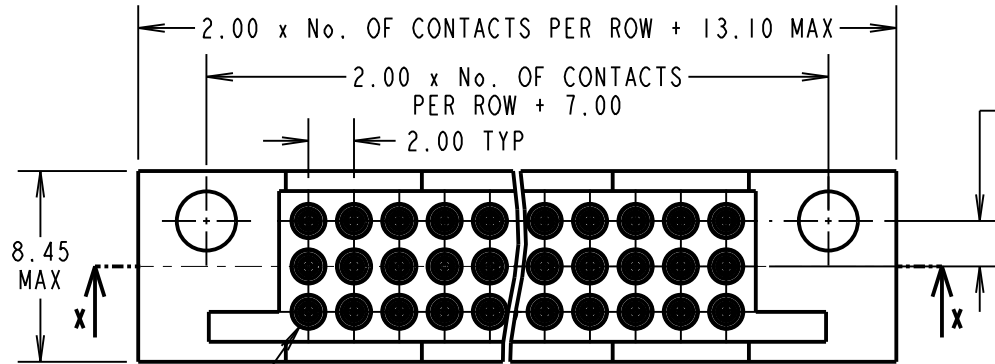

2.00 TYP




No. 1 CONTACT

No. 1 CONTACT

2.00 x (No. OF CONTACTS PER ROW - 1)

NOTES:

1. FROM No. 1 POSITION, CONTACTS NUMBERED IN SEQUENCE FROM LEFT TO RIGHT AND FROM BOTTOM ROW TO TOP ROW (SEE ABOVE).
2. FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION CO17XX (LATEST ISSUE).

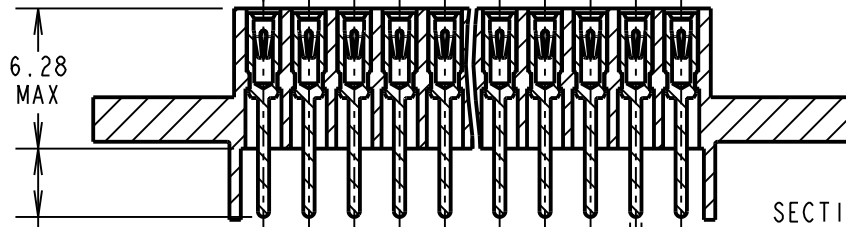


SECTION X-X

(3.0)

Ø0.50 TYP

2.00 x (No. OF CONTACTS PER ROW - 1)

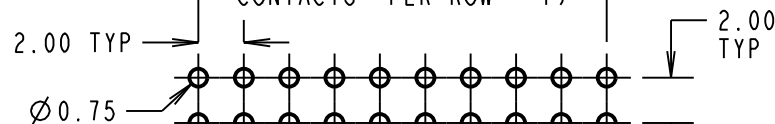

RECOMMENDED PCB LAYOUT - TOLERANCE ±0.05mm

SPECIFICATION:

MATERIAL:

MOULDING = POLYAMIDE 46 UL94V-0, BLACK
 CONTACT CLIP = BERYLLIUM COPPER
 CONTACT BODY = COPPER ALLOY
 FINISH (ALL OVER NICKEL):
 01 = 4µm TIN/LEAD BODY, 0.30µm GOLD CLIP
 05 = 0.28µm GOLD BODY, 0.30µm GOLD CLIP
 42 = 4µm 100% TIN BODY, 0.30µm GOLD CLIP

ELECTRICAL:

CURRENT RATING AT 25°C = 3.0A MAX
 CURRENT RATING AT 85°C = 2.2A MAX
 VOLTAGE PROOF = 360V AC/DC

CONTACT RESISTANCE:

INITIAL = 20mΩ MAX
 AFTER CONDITIONING = 25mΩ MAX
 INSULATION RESISTANCE:
 INITIAL = 1000MΩ MIN
 AFTER CONDITIONING = 100MΩ MIN

MECHANICAL:

INSERTION FORCE = 2.8N MAX, 1.0N MIN
 WITHDRAWAL FORCE = 1.8N MAX, 0.2N MIN
 DURABILITY = 500 OPERATIONS

ENVIRONMENTAL:

OPERATING TEMPERATURE = -55°C TO +125°C
 PACKING: TRAYS

ORDER CODE: **M80-707XXXX**

TOTAL No. OF CONTACTS: _____
 27, 36, 45, 51, 63

FINISH: _____
 01 = TIN/LEAD SHELL, GOLD CLIP
 05 = GOLD SHELL, GOLD CLIP
 42 = 100% TIN SHELL, GOLD CLIP

POTTING WALLS: _____
 BLANK = POTTING WALLS REMOVED
 A = POTTING WALLS RETAINED

| | | | |
|---------------------|------|----------|-------|
| MGP | 8 | 03.03.21 | 22283 |
| NAME | ISS. | DATE | CN/CO |
| APPROVED: MGP | | | |
| CHECKED: RTP | | | |
| DRAWN: W. J. BOURNE | | | |
| CUSTOMER REF.: | | | |
| ASSEMBLY DRG: | | | |

HARWIN

www.harwin.com
 technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
 X.X = ±0.50mm
 X.XX = ±0.20mm
 X.XXX = ±0.01mm

ANGLES = ±5°
 UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE: 3-ROW DATAMATE
 FEMALE VERTICAL PC TAIL
 ASSEMBLY

DRAWING NUMBER:
M80-707XXXX

SHT
 2 OF 2