
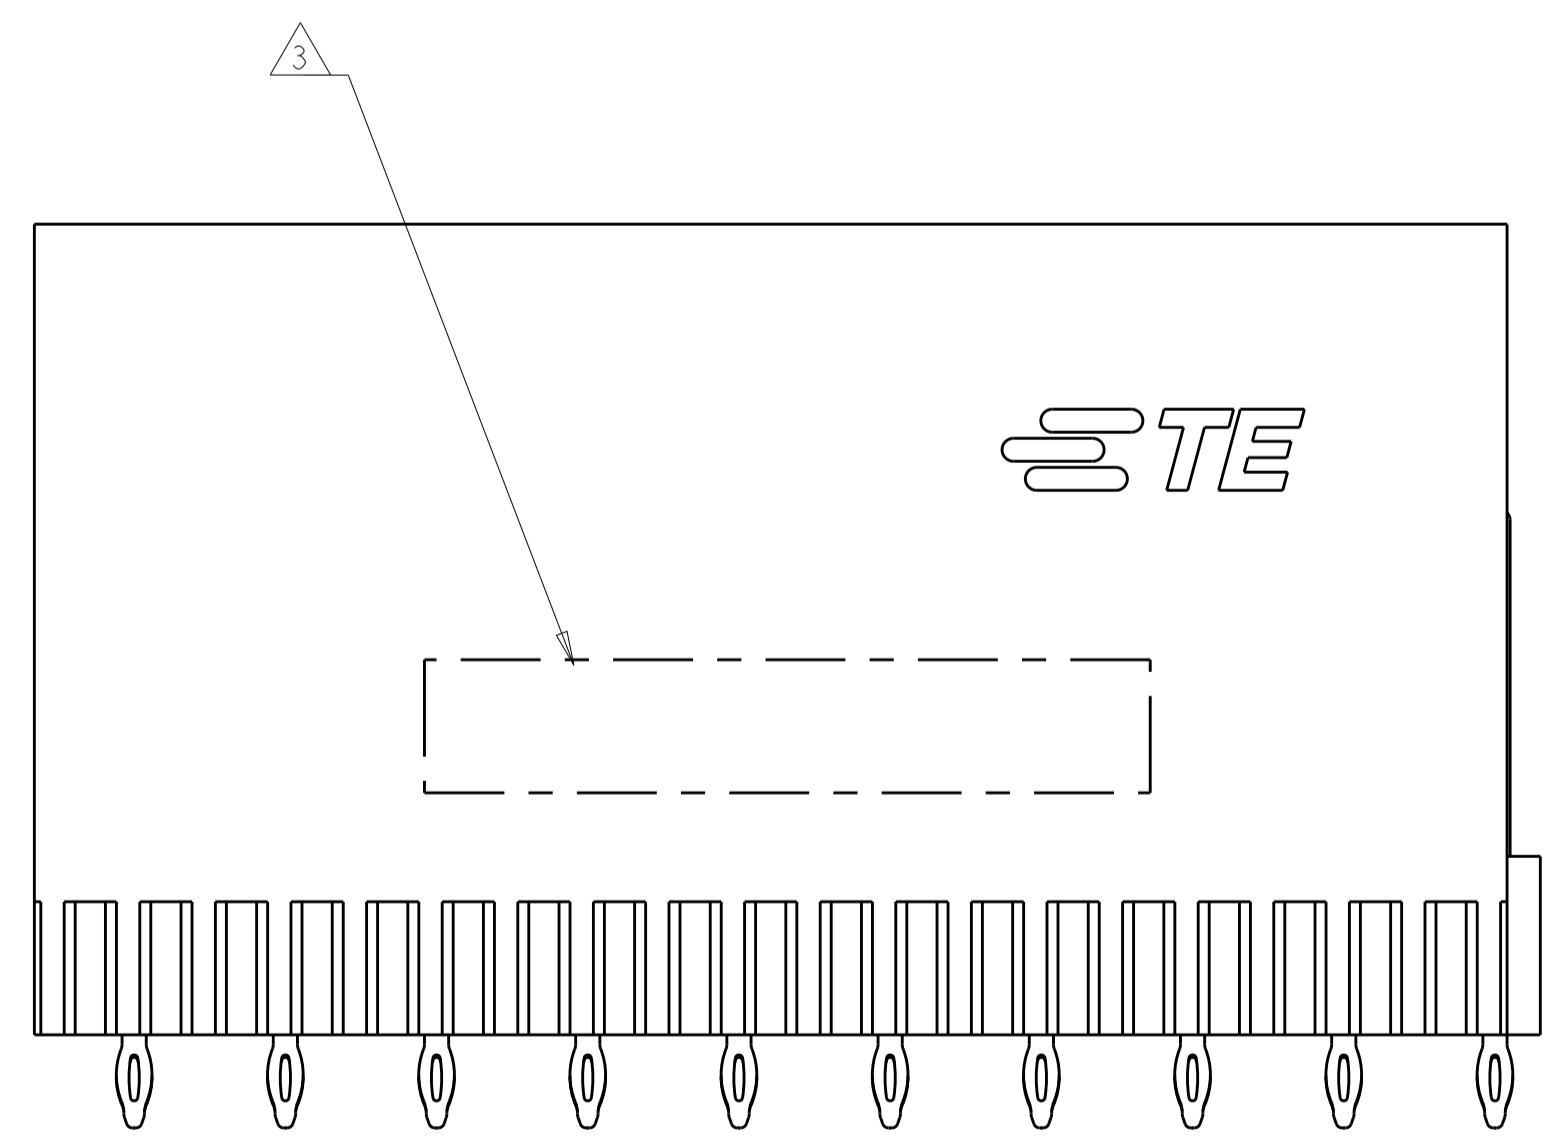
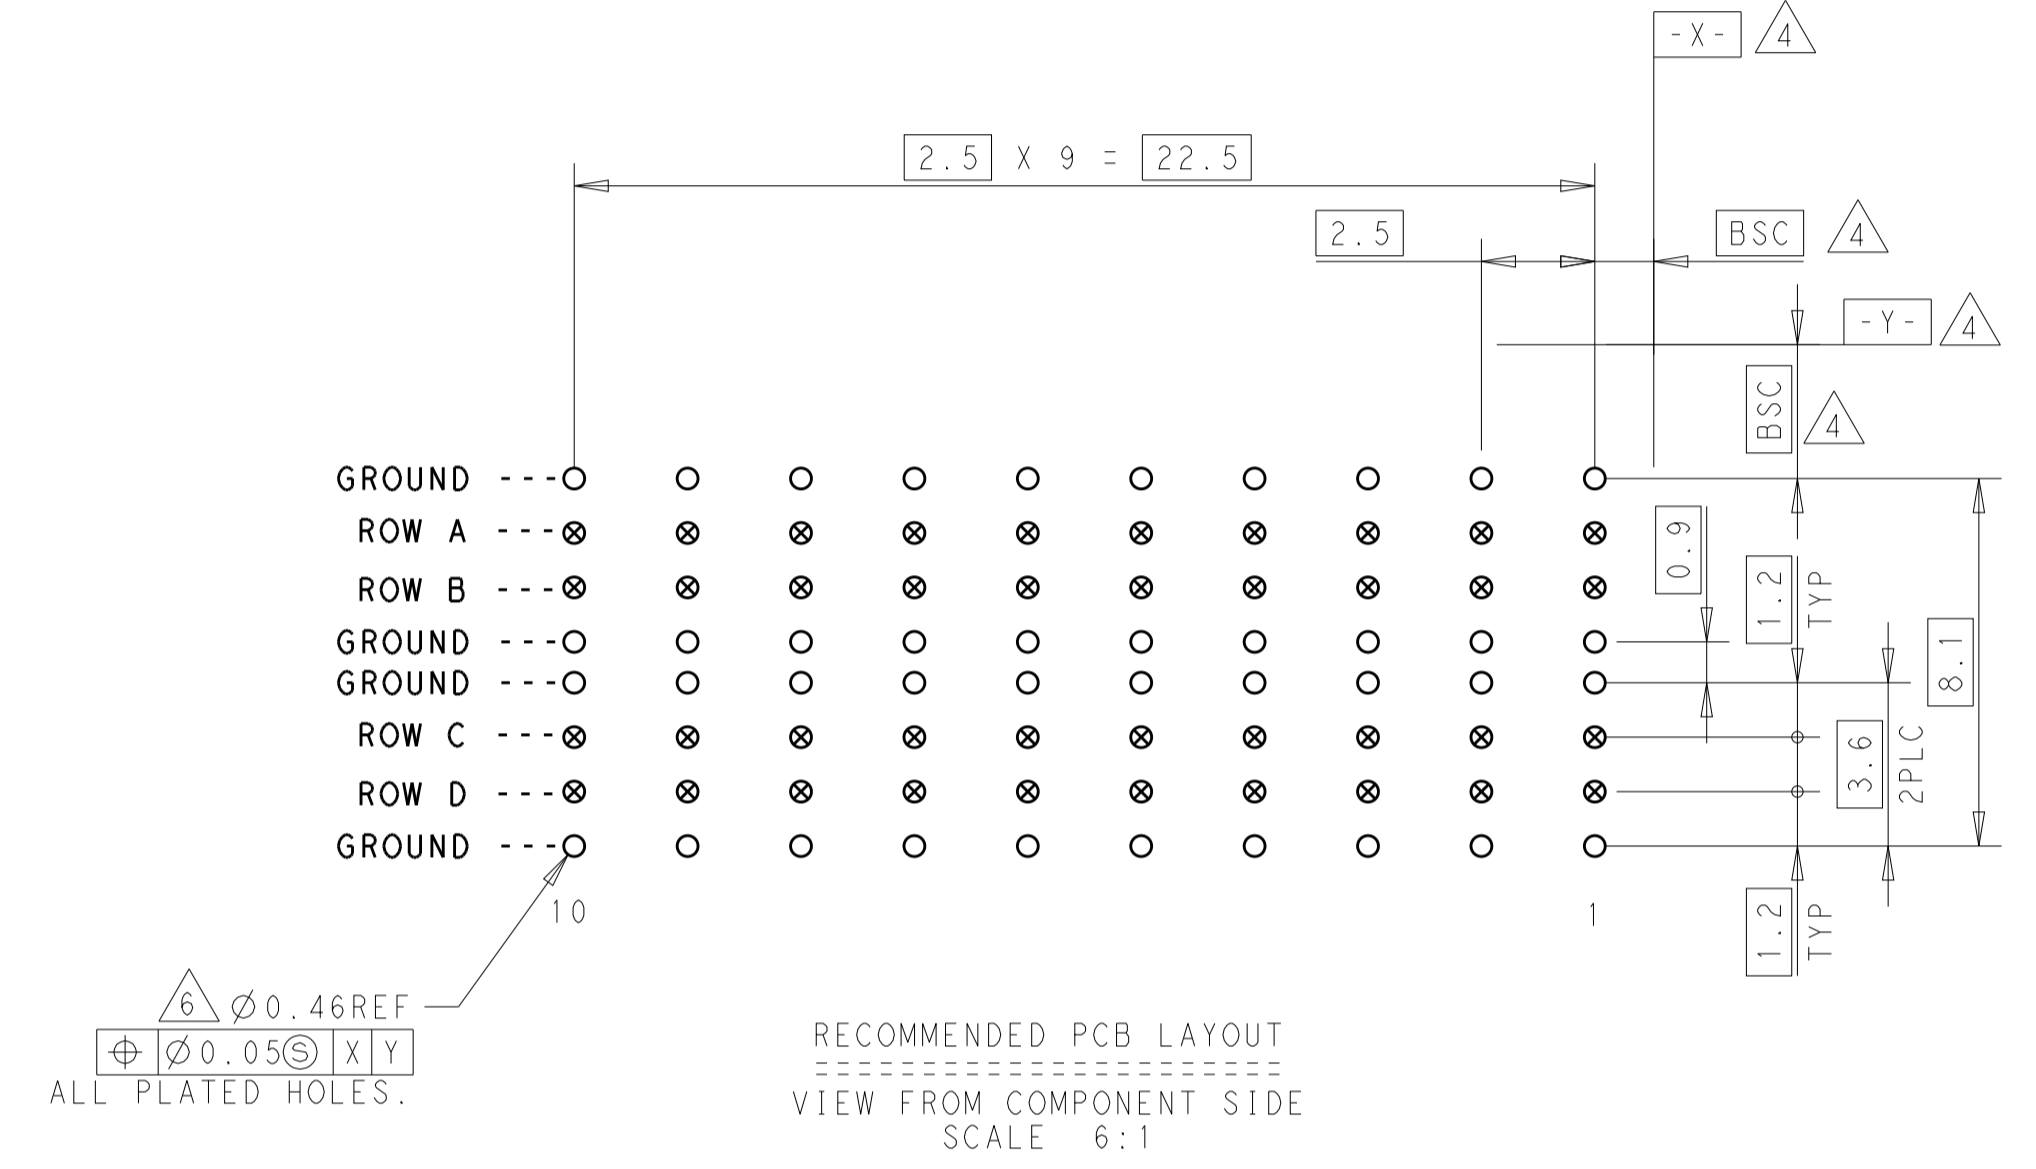
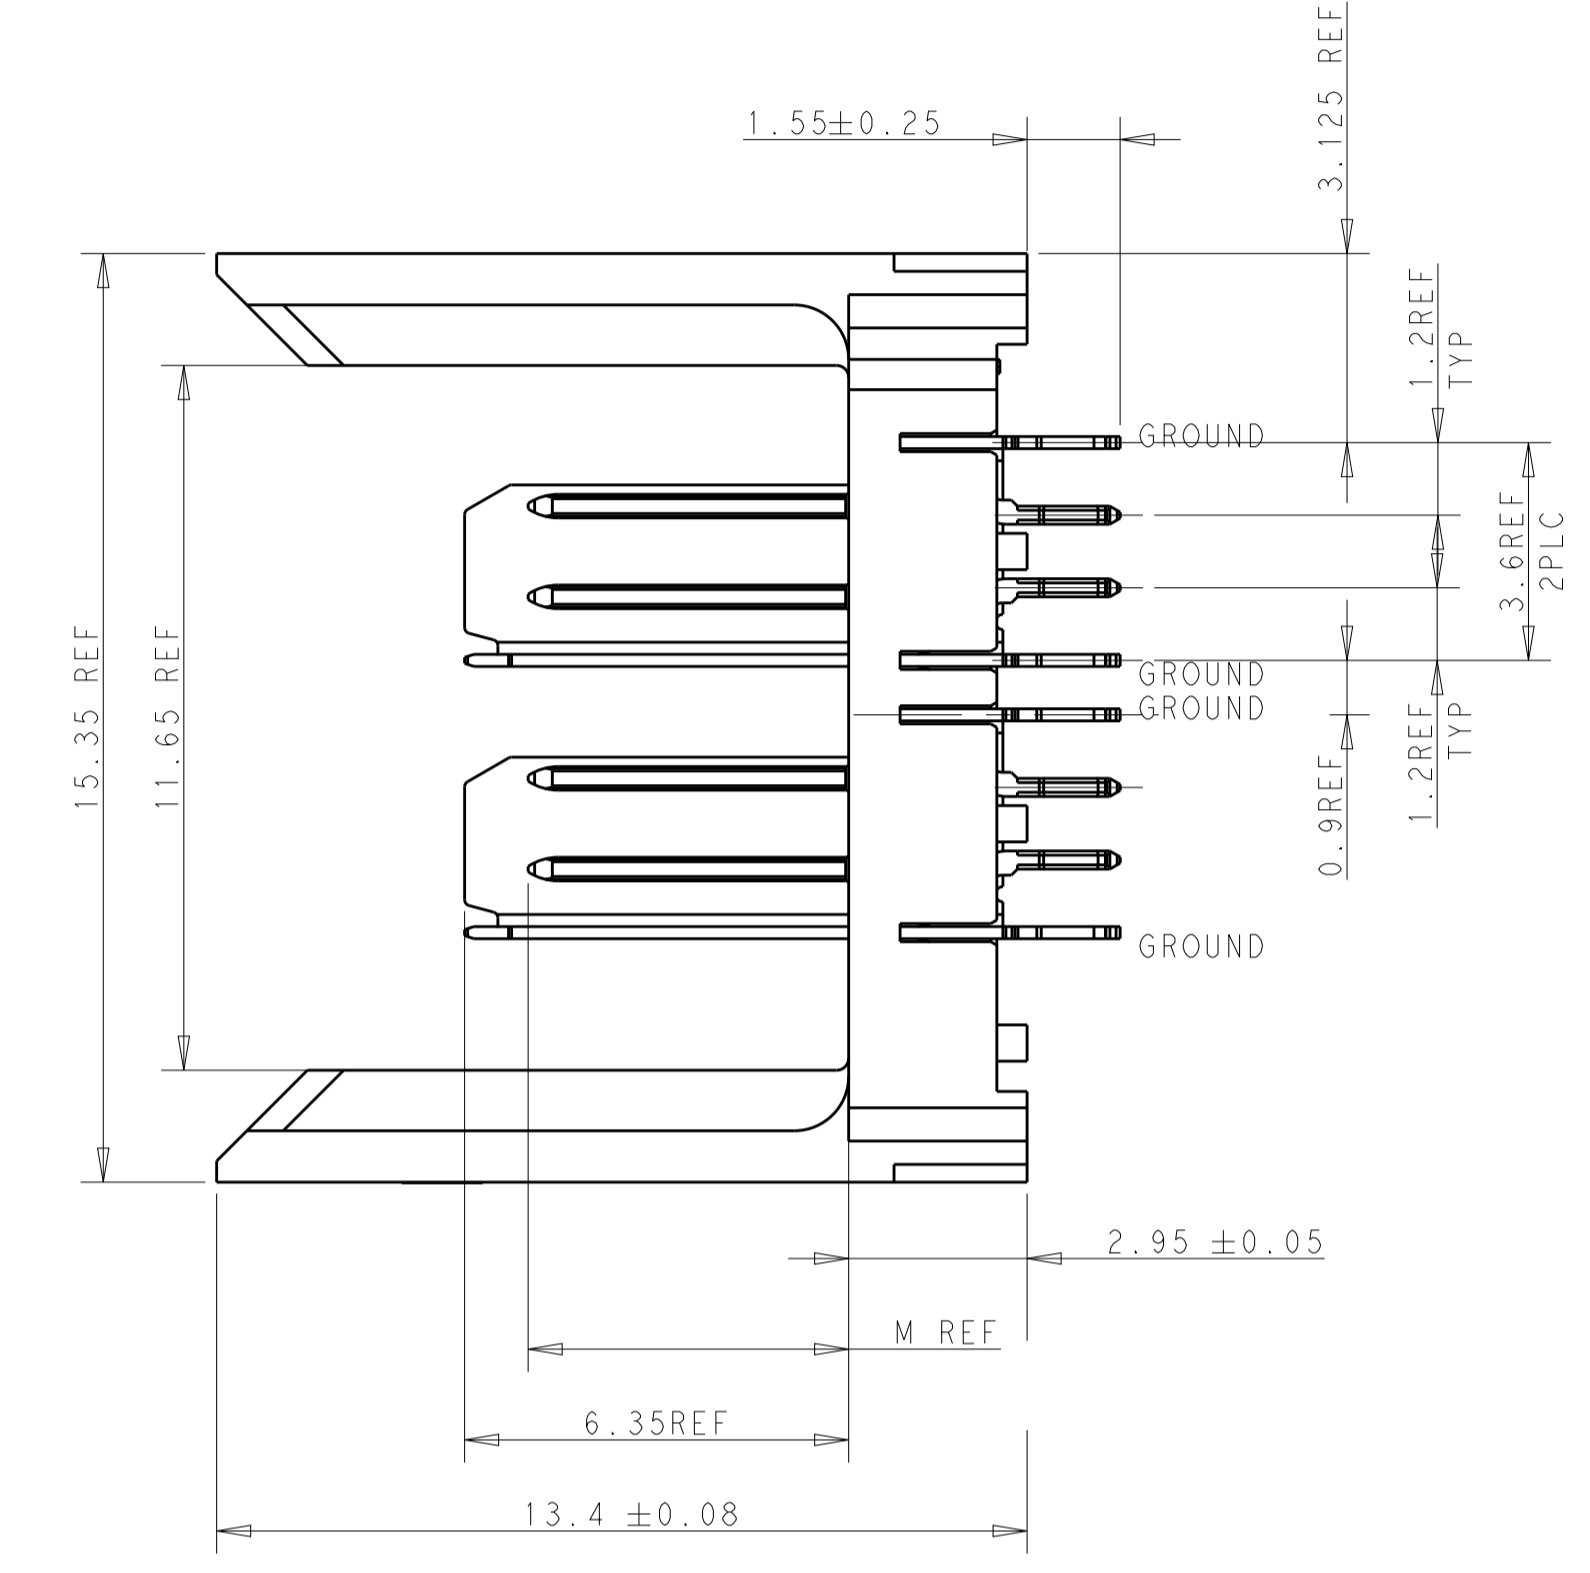


LOC	DIST	REV	DATE	BY	APP'D
-	-	A	7JAN2013	D.S	A.C
-	-	B	20MAY2013	D.S	M.Y
-	-	C	1MAR2018	D.S	H.L
-	-	D	15MAY2018	D.S	H.L

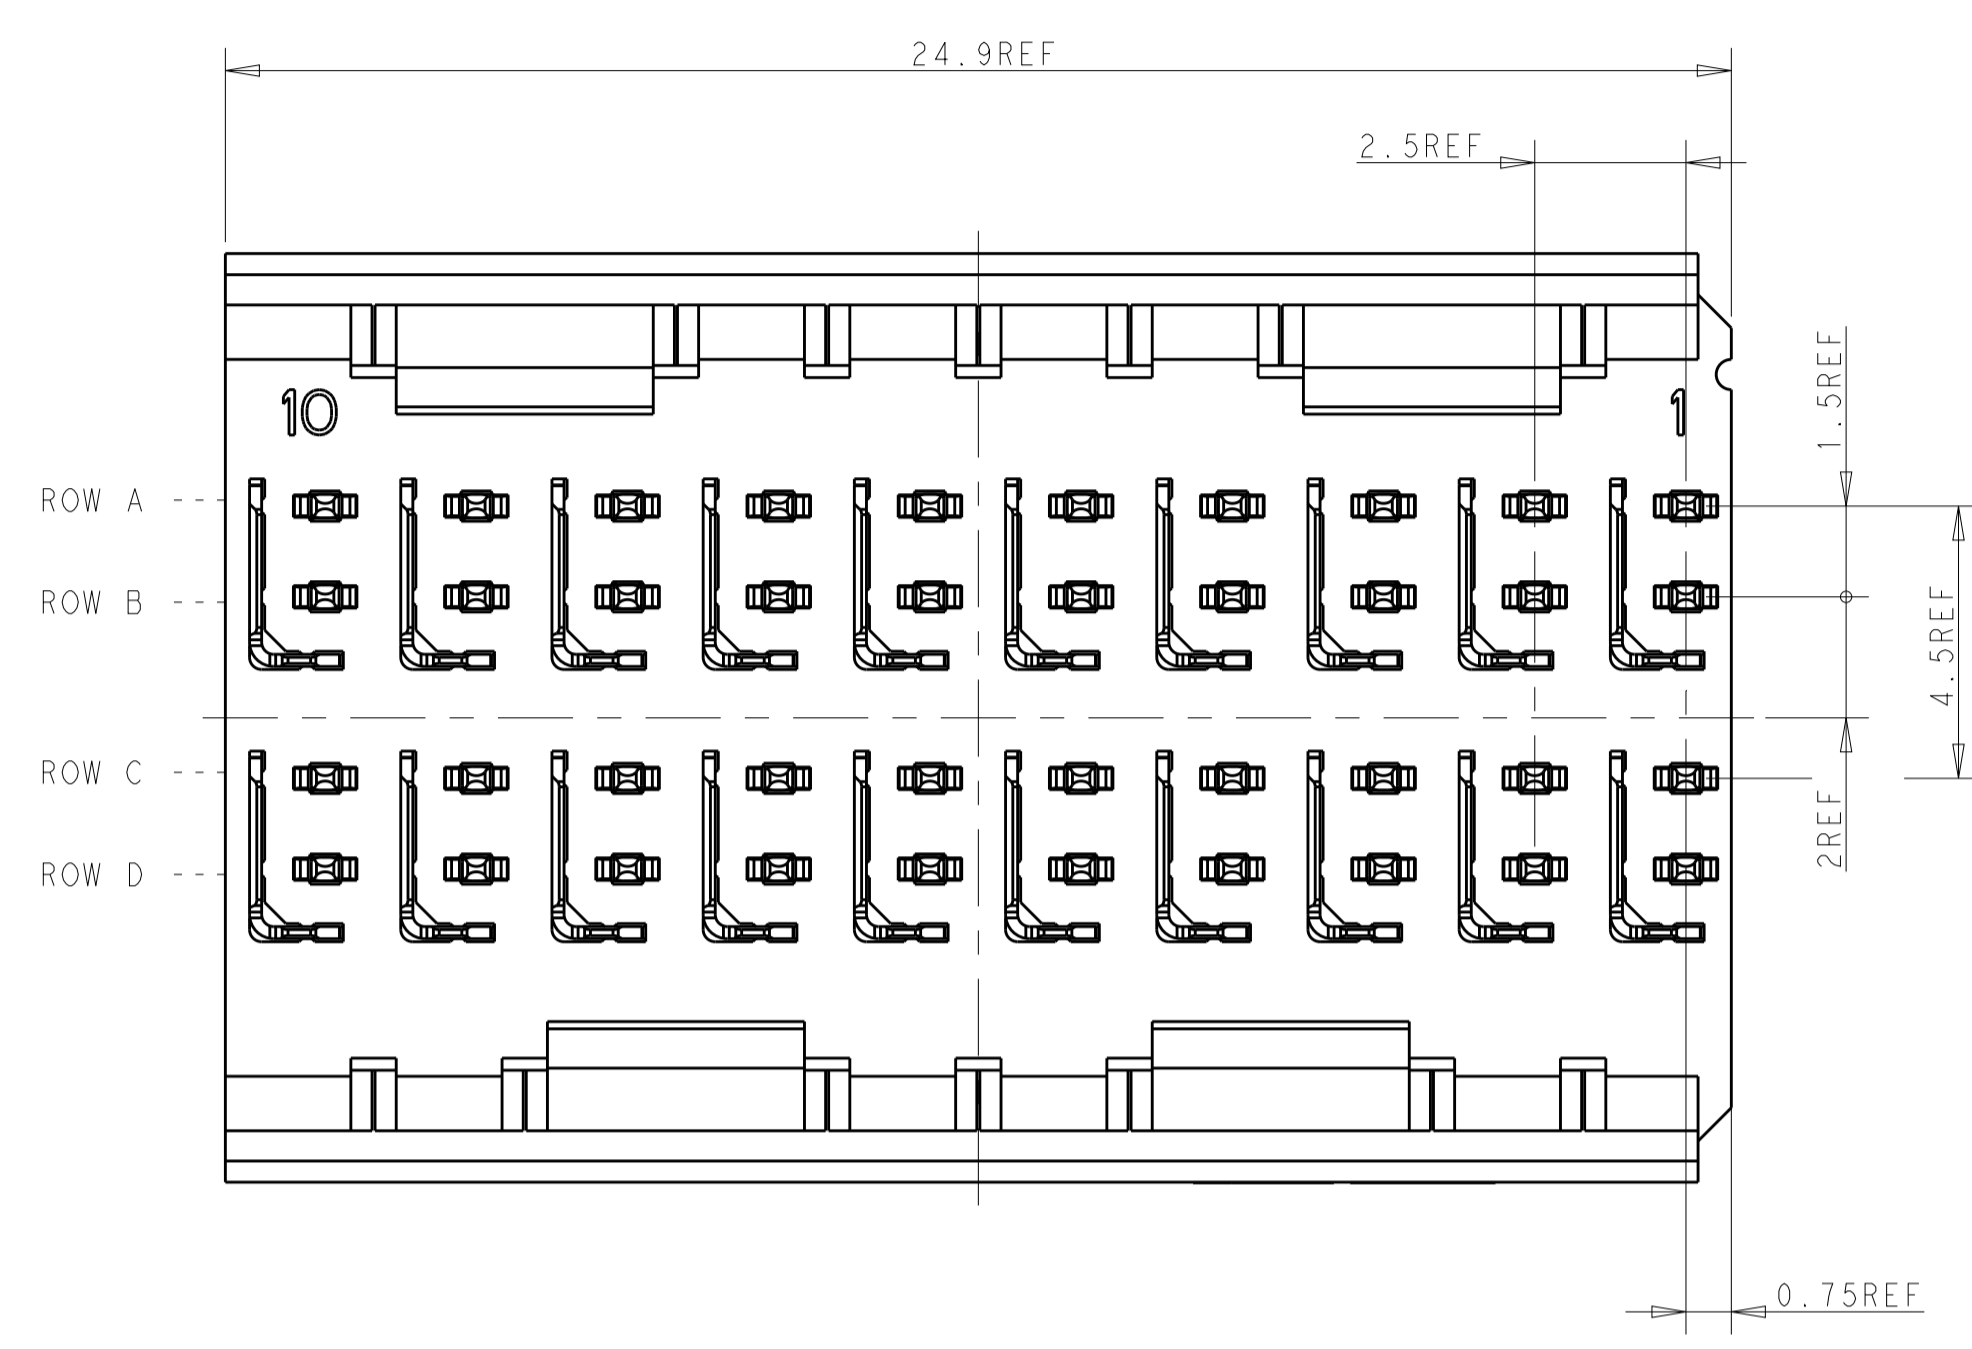

- 1 MATERIAL:  
CONTACT AND SHIELD: PHOSPHOR BRONZE  
HOUSING: THERMALPLASTIC, UL 94V-0
- 2 FINISH: SIGNAL AND GROUND CONTACTS:  
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055-1; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS  
COMPLIANT PIN AREA: 0.5 um MIN MATTE  
TIN OVER BASE PLATING
- 3 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 5 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 RECOMMENDED THRU HOLE DIAMETER AND PLATING THICKNESSES PLEASE REFER TO APPLICATION SPEC 114-13059

3.80	2170328-2
5.30	2170328-1
DIM. M	PART NUMBER

DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-PLC ±0.25 1-PLC ±0.25 2-PLC ±0.25 3-PLC ±0.25 4-PLC ±0.25 ANGLES		DWN DAVID SHEN 29APR2012 CHK SANDERS YAN 29APR2012 APVD ALEY CAI 29APR2012 PRODUCT SPEC 108-2055-1 APPLICATION SPEC 114-13059 WEIGHT CUSTOMER DRAWING	NAME ASSEMBLY DRAWING 2 PAIR, 10 COLUMN, VERTICAL HM ZD+, HEADER SIZE A1 CAGE CODE DRAWING NO. C=2170328 RESTRICTED TO
MATERIAL: 1 FINISH: 2		SCALE 6:1 SHEET 1 OF 1 REV D	