


2G

# Cinterion® BGS5 Wireless Module

With Advanced Processing Power

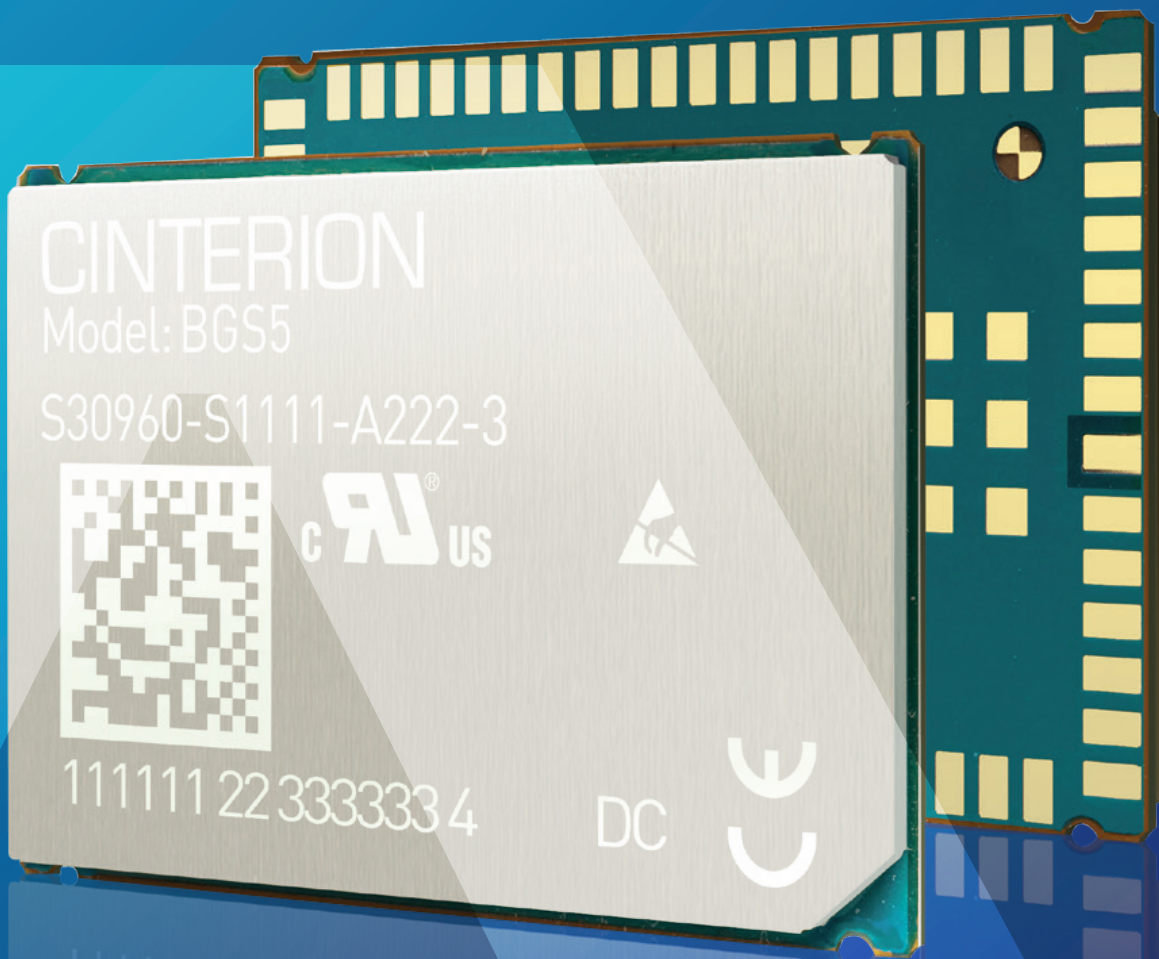

# Cinterion® BGS5 Wireless Module

With Advanced Processing Power



## BGS5



**Quad Band 2G GPRS Class 12**



**FOTA Configurable &  
Free of Charge**



**USB 2.0 High Speed Compatible**



**Embedded TCP/IP Stack**



**Multi Design Capability (LGA)**



**Java embedded**



**Advanced Temperature Management**



**RLS Monitoring (Jamming Detection)**

Thales M2M is proud to introduce the Cinterion BGS5: the next step in advanced 2G machine-to-machine (M2M) processing and communications. BGS5 provides advanced processing and an embedded Java virtual machine to offload the application, or even remove the microprocessor, significantly reducing the device complexity and Bill of Material (BOM) cost. With a small footprint compatible with the Cinterion Industrial platform, it offers the perfect complement to 3G solutions when the application processing power is required, but the high throughput is not.


At only 27.6 mm x 18.8 mm x 2.7 mm, BGS5 is the smallest module to offer advanced application processing power. It is a full Quad-Band GSM (850/900/1800/1900 MHz) module with GPRS class 12 support. Designed to deal with harsh environments, BGS5 supports M2M-grade extended temperature ranges.

The application processor makes BGS5 the perfect fit for applications like track and trace or Automatic Meter Reading (AMR), remote maintenance and control, and aftermarket telematics. In such applications, the module itself can be programmed to collect specific information, process it via embedded business logic, and send the results at a scheduled time. Device makers can program and add applets to fit their needs, or use existing JSRs which are publically available. As the

Java platform is open, this code can then be ported to other Java enabled devices later without requiring additional modifications.

As part of our Edge-to-Enterprise concept, the embedded Java allows seamless integration between your application and the backend server – optimizing information collection and processing while ensuring you a future-proof infrastructure. In addition any infrastructure developed on this platform can easily be migrated to any other Java enabled Cinterion module. BGS5 is a key product for the Industrial platform which embeds intelligence directly in the module, saving you cost and design complexity!

## Perfect M2M at Minimal Footprint

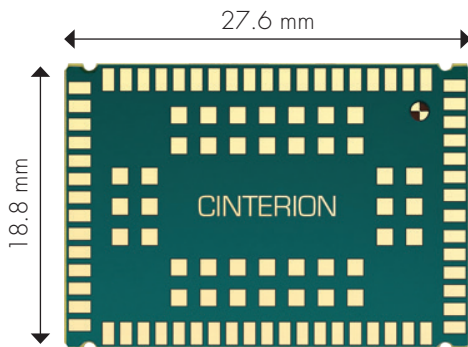

### LGA technology

Land grid array, or LGA, is a surface-mount technology for fully automated manufacturing allowing to benefit from efficiency and process consistency. Cinterion's unique type of LGA technology is designed with focus on highest reliability and flexibility and to meet the demanding requirements of M2M application manufacturers.

### Multi Design Capability

The unique BGS5 footprint, based on LGA technology, offers seamless migration from 2G to 3G within a single design footprint. Compatibility with the world's smallest HSPA wireless module ensures future-proof design and longevity of M2M applications.

### Java™

Java offers easy and fast application development, a broad choice of tools, high code reusability, easy maintenance, a proven security concept, on-device debugging as well as multi-threading programming and program execution.

### Thales M2M Support includes:

- Personal design-in consulting for hardware and software
- Extensive RF test capabilities
- GCF/PTCRB conform pretests to validate approval readiness
- Regular training workshops



Local engineers, a competent helpdesk, a dedicated team of R&D specialists and an advanced development center are the hallmarks of our leading support offer.

## Cinterion® BGS5 Features

### General Features

- GSM Quad-Band: 850 / 900 / 1800 / 1900 MHz  
3GPP Release 6
- GPRS multi-slot Class 12
- Compliant to GSM phase 2/2+
- Output power:
  - Class 4 (2W) for GSM850
  - Class 4 (2W) for GSM900
  - Class 1 (1W) for GSM1800
  - Class 1 (1W) for GSM1900
- SIM Application Toolkit, Class 3
- Control via standardized and extended AT commands (Hayes, TS 27.007 and 27.005)
- TCP/IP stack access via AT commands and transparent TCP services
- Secure Connection for client IP services
- Internet Services TCP/UDP server/client, DNS, Ping, FTP client, HTTP client

- Supply voltage range 3.3 - 4.5 V, highly optimized for minimal power consumption
- LGA66 soldering mount, MSL4
- Dimensions: 27.6 x 18.8 x 2.7 mm
- Weight: 3 g
- Operating temperature: -40°C to +85°C

### Specifications

- GPRS Class 12
  - DL: max. 85.6 kbps,
  - UL: max 85.6 kbps
  - Mobile Station class B
- CSD data transmission up to 9.6 kbps, V.110, non-transparent
- USSD support
- SMS text and PDU mode, cell broadcast
- High quality digital voice support for handset, headset and handsfree operation
- Speech codec: FR, HR, EFR and AMR

## Special Features

- USB interface supports multiple composite mode and a Linux-/Mac- compliant mode
- Firmware update via serial and USB interfaces
- Real time clock with alarm functionality
- Multiplexer according 3GPP TS 27.010
- RLS Monitoring (Jamming detection)
- Informal Network Scan
- Customer IMEI/SIM-Lock as variant
- Integrated FOTA, configurable and free of charge

## Java Open Platform

- Java™ profile IMP-NG & CLDC 1.1 HI
- Secure data transmission with HTTPS/SSL
- Multi-Threading programming and Multi-Application execution
- 5 MB RAM and 10 MB Flash File System

## Interfaces (Land Grid Array)

- Power supply
- Digital Audio interface, prepared for Analog Audio support
- USB 2.0 Interface
- Serial interface, including automatic baud rate detection

- Serial interface (4-wire)
- UICC/SIM card interface 1.8 V and 3.0 V
- 4 GPIO pins (special option for PWM or Buzzer and status indication functionality)
- I<sup>2</sup>C interface
- ADC interface

## Drivers

- Serial interface modem driver for Microsoft® Windows 8™, 7™, Vista™, XP™
- USB and MUX Drivers for Microsoft® Windows Embedded Compact™ 7 and Embedded Handheld® 6.5
- MUX Driver for Microsoft® 8™, 7™, Vista™, XP™

## Approvals

- CE, R&TTE, GCF, FCC, PTRCB, UL, IC
- GCF Listing
- Other local approvals and network operator certifications
- EuP, RoHS and REACH compliant

## Thales in IoT: Driving digital transformation with the power of the IoT

Thales delivers innovative IoT technology that simplifies and speeds enterprise digital transformation. For more than 20 years, our customers – in a wide range of industries - trust our IoT solutions to seamlessly connect and secure their IoT devices, maximise field insights, and accelerate their global business success.

Thales solutions:

- **Connect** assets to wireless networks and cloud platforms
- **Manage** the long lifecycle of IoT solutions
- **Secure** devices and their data
- **Analyse** real-time data transforming it into business intelligence that improves decision making

Our 360° approach provides the essential building blocks needed to simplify design, streamline development and accelerate time-to-market.

For more information, please visit [www.thalesgroup.com/loT](http://www.thalesgroup.com/loT) or follow [@ThalesIoT on Twitter](https://twitter.com/ThalesIoT)

