
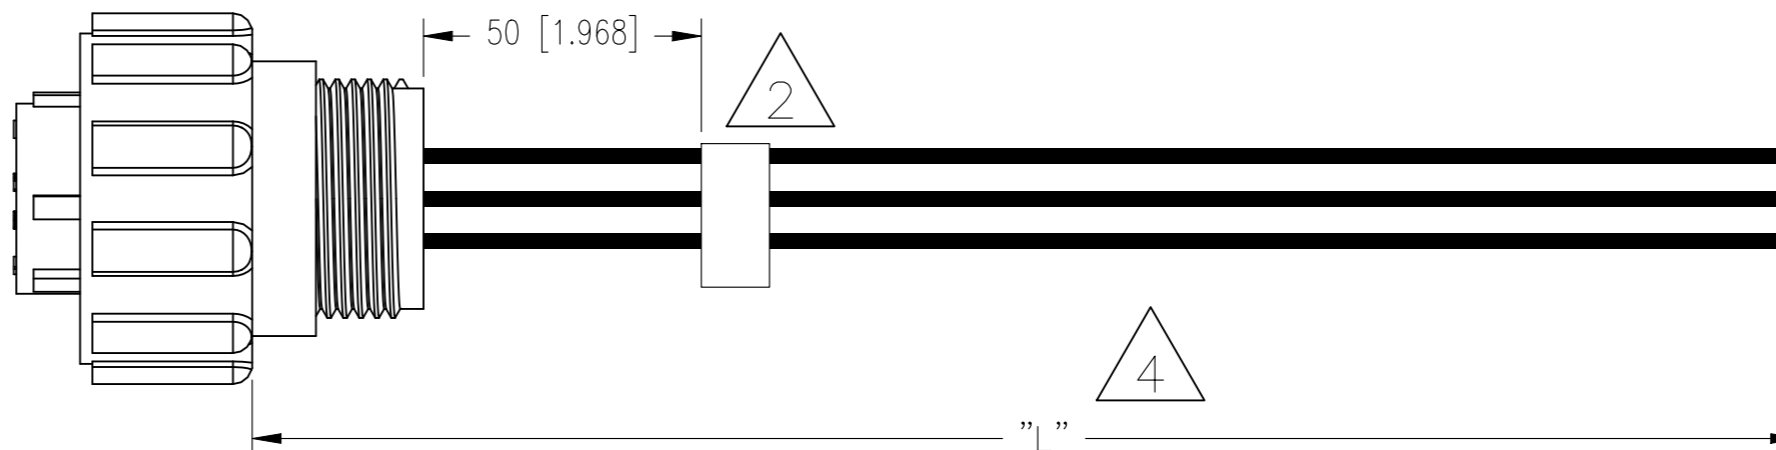


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	B	INITIAL RELEASE	09NOV2021	GSK JDA

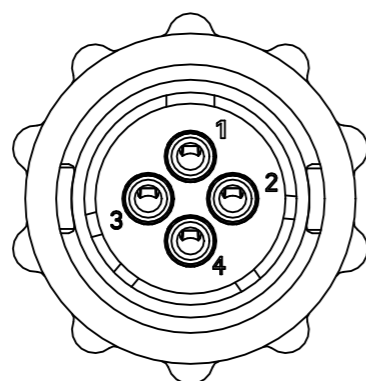

NOTES:

1. OVERALL INSULATION CRIMP DIAMETER, INCLUDING CRIMP BARREL, MUST NOT EXCEED .125 [3.18]

2 LABEL LOCATED APPROXIMATELY WHERE SHOWN. LABEL INFORMATION AS FOLLOWS:

2386907-X	TE P/N
REV B	CUST REV
TE/MEXICO	MANUFACTURER NAME/COUNTRY OF ORIGIN
MM/DD/YY	DATE CODE

3. WIRE IDENTIFICACIONES REQUIREMENTS:

- 3.1 WIRES SHALL BE MARKED PERMANENTLY WITH THE CAVITY NUMBER "X"
- 3.2 MARKINGS SHALL APPEAR SPACED EVERY 12 INCHES (APROXIMATED 305 mm).

4 "L" REPRESENTS THE LENGTH OF THE WIRE USED FOR THE LEADS.

TE PN	LENGTH "L"
2386907-1	0.5M
2386907-2	1.0M
2386907-3	2.0M

5. TOLERANCES PER IPC STANDARD:  
IPC-A-620A

Metric	
<0.3 m	+25mm -0mm
>0.3 m - 1.5m	+50mm -0mm
>1.5 m - 3m	+100mm -0mm
>3 m - 7.5m	+150mm -0mm
>7.5m	+5% -0%

- 6. HARNESS SHALL BE SHIPPED IN SEALED PLASTIC BAG.
- 7. CONTINUITY ELECTRICAL TEST MUST BE PERFORMED.
- 8. WIRE 18 AWG

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09NOV2021 SATHISH KUMAR G	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK 09NOV2021 JUAN AVILA		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 09NOV2021 JUAN AVILA	NAME CPC PLUG CONNECTOR CABLE, STD SEX, SERIES 1, 11-4	
0 PLC ± -		PRODUCT SPEC	APPLICATION SPEC	
1 PLC ± -		SIZE CAGE CODE DRAWING NO RESTRICTED TO		
2 PLC ± -		A3 00779 C-2386907		
3 PLC ± -		SCALE NTS SHEET 1 OF 1 REV B		
4 PLC ± -				
ANGLES ± -				
MATERIAL		CUSTOMER DRAWING		
FINISH				