


REV	ECO	DATE
D	11825	05/18/1992
E	11948	08/06/1992
F	58265	05/13/2022

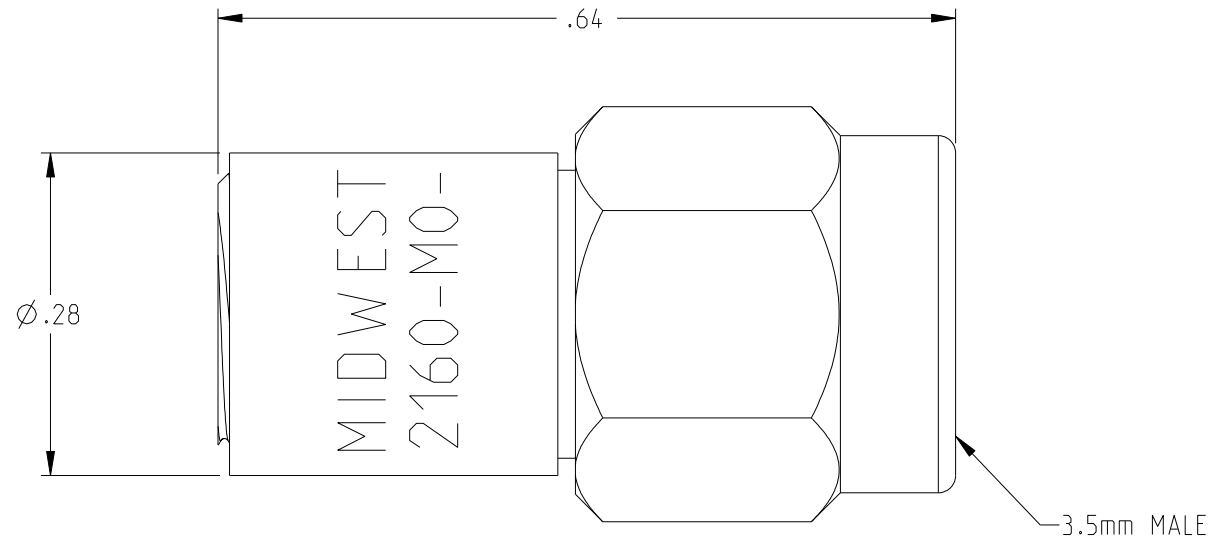


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS & FINISH:

- 1.1 HOUSING AND COUPLING NUT: PASSIVATED STAINLESS STEEL
- 1.2 SUPPORT BEAD: POLYETHERIMIDE (ULTEM)
- 1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
- 1.4 GASKET: SILICONE RUBBER

2. SPECIFICATIONS:

- 2.1 FREQUENCY RANGE: DC TO 26.5 GHz
- 2.2 VSWR (MAX):
 - DC TO 18.0 GHz: 1.12:1
 - 18 TO 26.5 GHz: 1.18:1
- 2.3 INPUT POWER (MAX): 2 WATTS AT +25°C, DERATED LINEARLY TO 1 WATT AT +125°C
- 2.4 IMPEDANCE: 50 OHMS NOMINAL
- 2.5 TEMPERATURE RANGE: -65°C TO +125°C

 <p>NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018</p>	Model No:	TRM-2160-M0-35M-02		MIDWEST MICROWAVE	
	RoHS2	<input checked="" type="checkbox"/>	2015/863/EU	Cage Code	34078
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	.XX ±.02		3RD ANGLE PROJECTION	ENGINEER:
	.XXX ±.005		ANGLES ±1°	J. KEREKES	Date:
Title:		TERMINATION 3.5MM MALE		Drawing No.	TRM-2160-M0-35M-02-01
REV.		F		Size	A
Workmanship Std:		DO NOT SCALE DRAWING		Sheet	1 OF 1