

Single relay - REL-IR2/LDP-125DC/2X21 - 2903664

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug-in industrial relay with power contacts, 2 PDTs, test button, status LED, freewheeling diode, mechanical switch position indicator, polarity: A1+, A2-, input voltage: 125 V DC



Key Commercial Data

| | |
|------------------------|---------------|
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| GTIN | |
| GTIN | 4046356758178 |

Technical data

Dimensions

| | |
|--------|---------|
| Width | 21.2 mm |
| Height | 27.5 mm |
| Depth | 35.6 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -40 °C ... 70 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Degree of protection | RT I |

Coil side

| | |
|---|---------------|
| Nominal input voltage U_N | 125 V DC |
| Input voltage range in reference to U_N | see diagram |
| Typical input current at U_N | 7.7 mA |
| Typical response time | 13 ms |
| Typical release time | 14 ms |
| Protective circuit | Damping diode |
| Status display | Yellow LED |

Single relay - REL-IR2/LDP-125DC/2X21 - 2903664

Technical data

Coil side

| | |
|---|--------|
| Power dissipation for nominal condition | 0.96 W |
|---|--------|

Contact side

| | |
|---------------------------------------|---------------------------|
| Contact type | 2 PDT |
| Type of switch contact | Single contact |
| Contact material | AgNi |
| Maximum switching voltage | 250 V AC/DC |
| Minimum switching voltage | 5 V (At 24 mA) |
| Min. switching current | 5 mA (at 24 V) |
| Maximum inrush current | 30 A (20 ms, N/O contact) |
| Limiting continuous current | 12 A |
| Interrupting rating (ohmic load) max. | 288 W (at 24 V DC) |
| | 124 W (at 48 V DC) |
| | 108 W (at 60 V DC) |
| | 52 W (at 110 V DC) |
| | 48 W (at 220 V DC) |
| | 3000 VA (for 250 V AC) |
| Switching capacity min. | 0.12 W |
| Motor load according to UL 508 | 1/2 HP, 240 V AC |

General

| | |
|--|---------------------------------------|
| Test voltage relay winding/relay contact | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Test voltage relay contact/relay contact | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Test voltage PDT/PDT | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Operating mode | 100% operating factor |
| Mechanical service life | approx. 2x 10 ⁷ cycles |
| Service life, electrical | see diagram |
| Mounting position | any |

Connection data

| | |
|-------------------|-----------------|
| Connection method | Plug connection |
|-------------------|-----------------|

Standards and Regulations

| | |
|----------------------------------|----------------------------|
| Connection in acc. with standard | CSA |
| Standards/regulations | IEC 60664 |
| | IEC 61810 |
| Rated insulation voltage | 250 V AC |
| Rated surge voltage | 4 kV |
| Insulation | Basic insulation |
| Pollution degree | 3 (Rated voltage of 230 V) |
| | 2 (Rated voltage of 400 V) |
| Overvoltage category | III |

Single relay - REL-IR2/LDP-125DC/2X21 - 2903664


Technical data

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings


Diagram

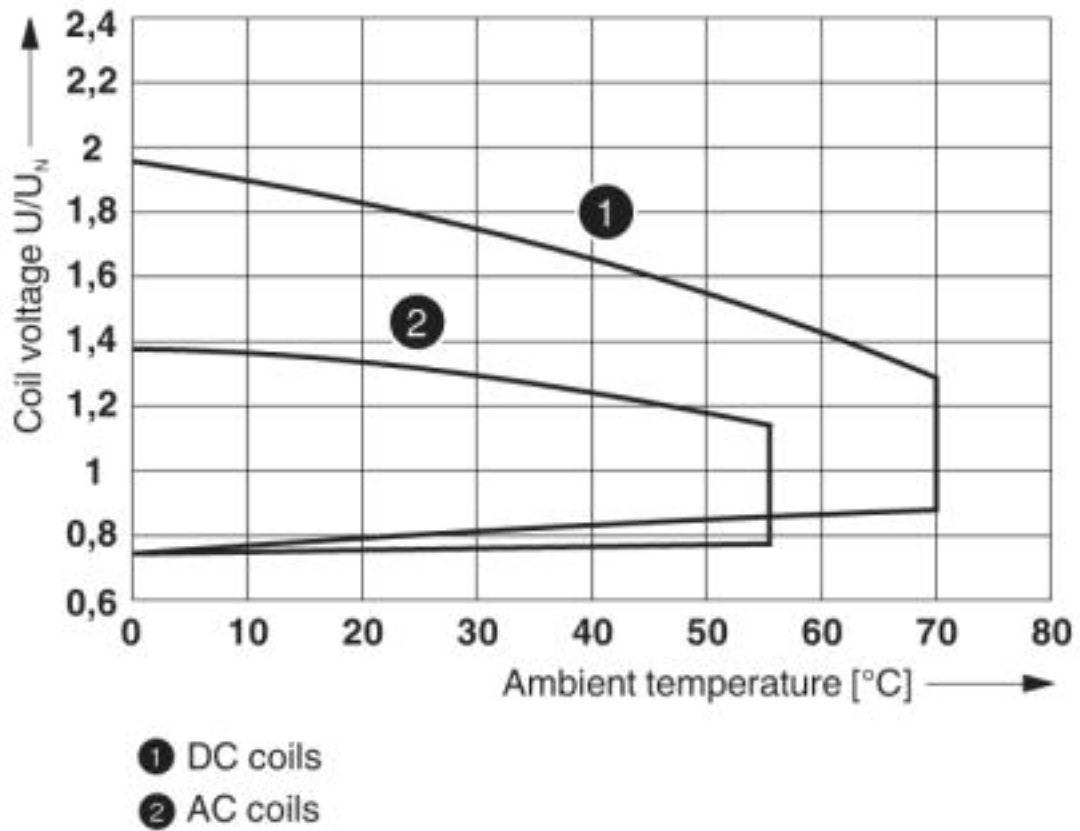

Operating voltage range

Single relay - REL-IR2/LDP-125DC/2X21 - 2903664


Diagram

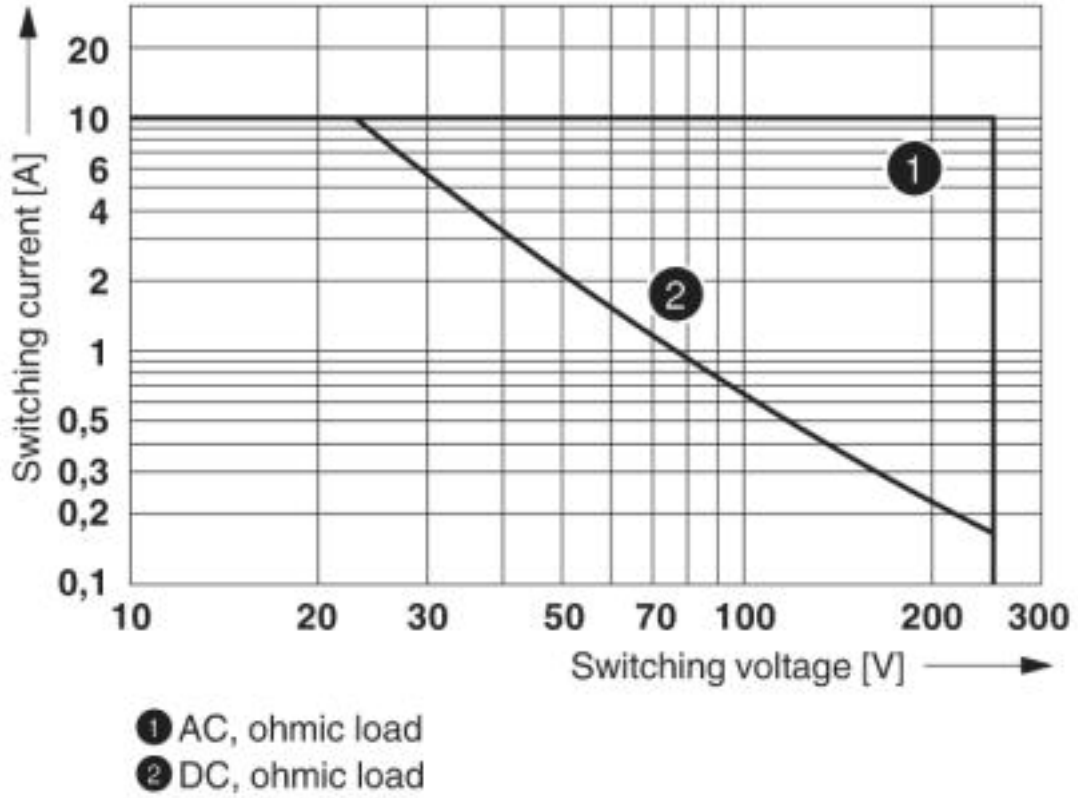

Interrupting rating

Single relay - REL-IR2/LDP-125DC/2X21 - 2903664


Diagram

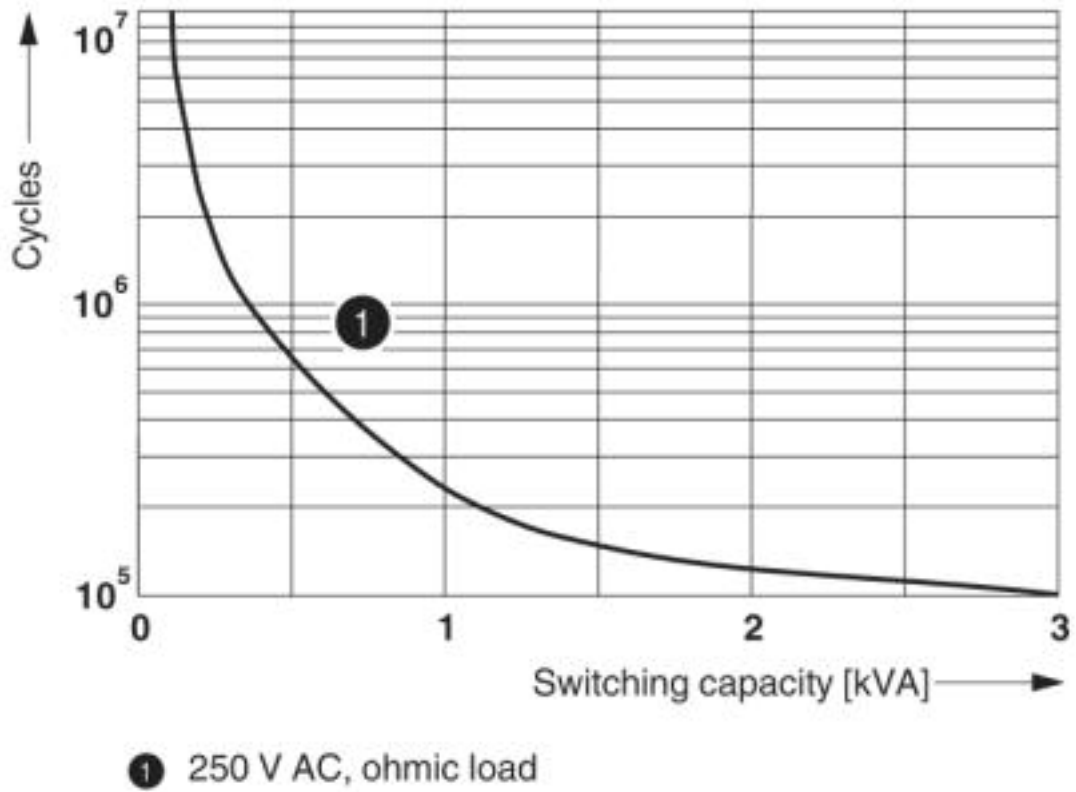

Electrical service life

Single relay - REL-IR2/LDP-125DC/2X21 - 2903664

Diagram

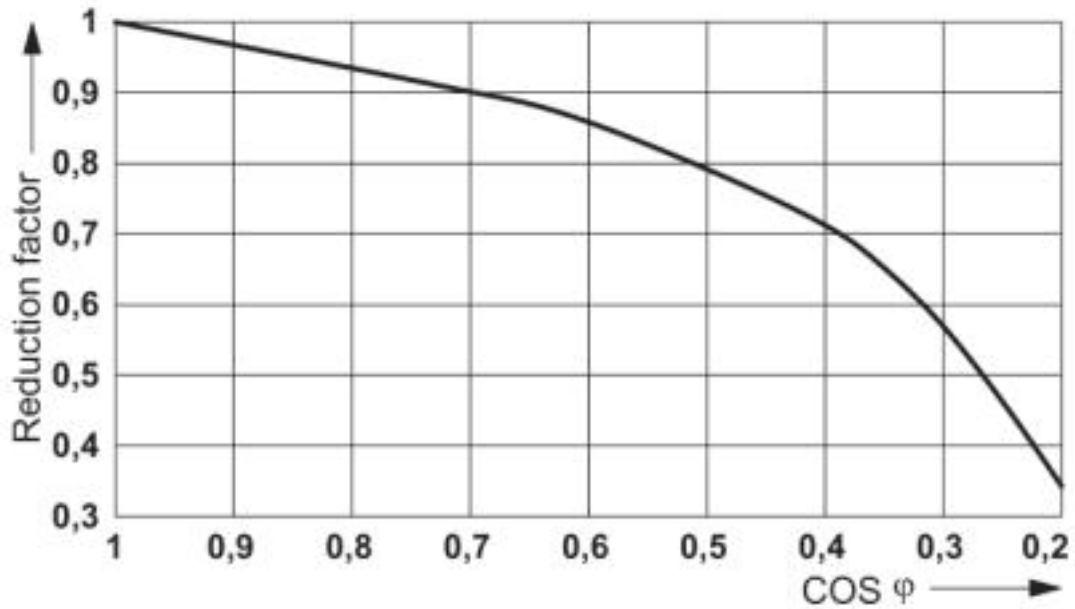

Service life reduction factor

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / VDE Zeichengenehmigung / EAC / EAC / cULus Recognized





Ex Approvals

Approval details

| | | | |
|----------------|--|---|---------------|
| CSA | | http://www.csagroup.org/services-industries/product-listing/ | 2554095 |
| UL Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 172140 |
| cUL Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 172140 |

Single relay - REL-IR2/LDP-125DC/2X21 - 2903664

Approvals

| | | | |
|------------------------|---|---|-----------------|
| VDE Zeichengenehmigung |  | http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx | 40040427 |
| EAC |  | | TR_TS_D_00573_c |
| EAC |  | | TR_TS_S_00010_c |
| cULus Recognized |  | | |

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>