

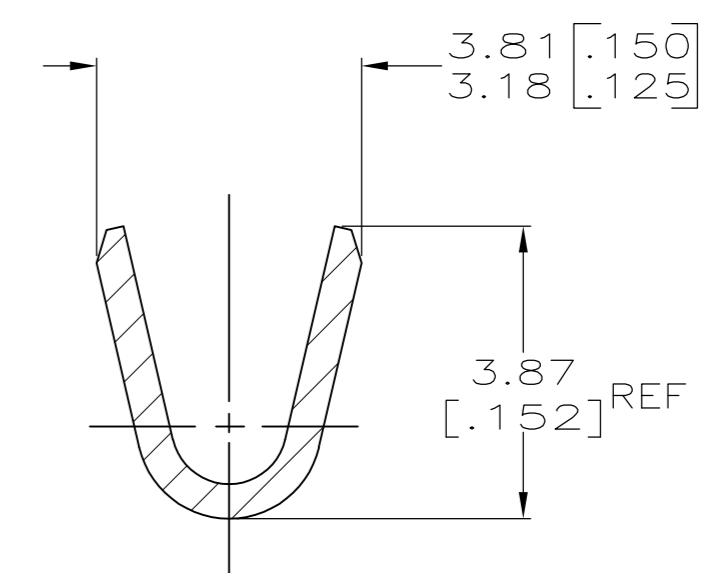
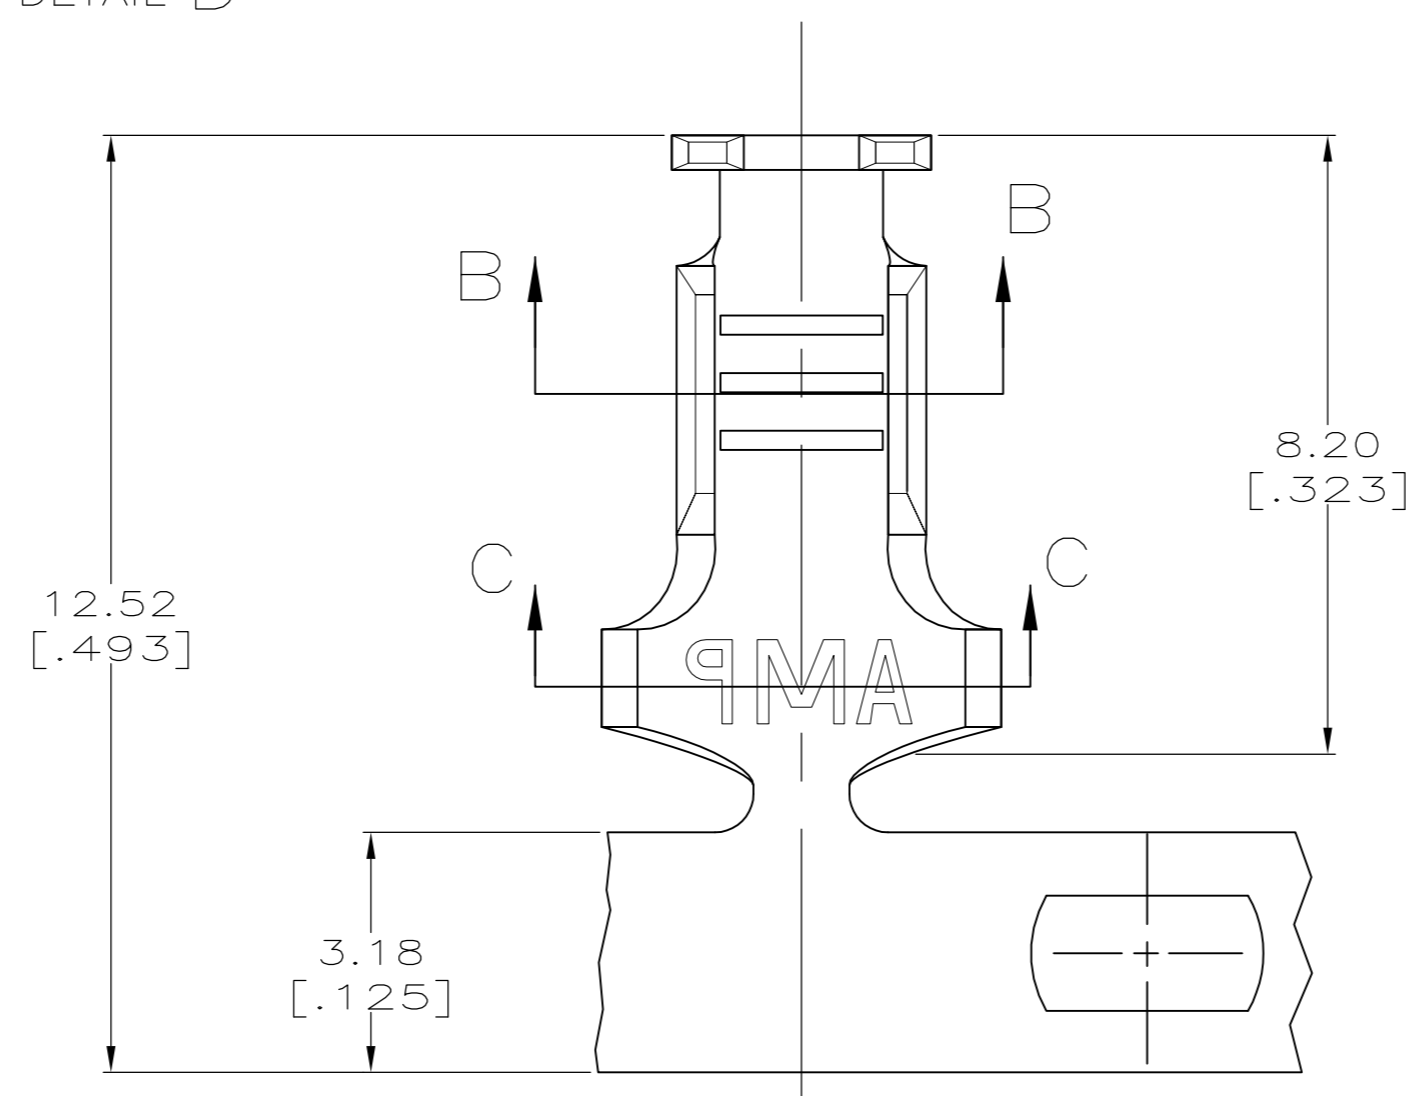
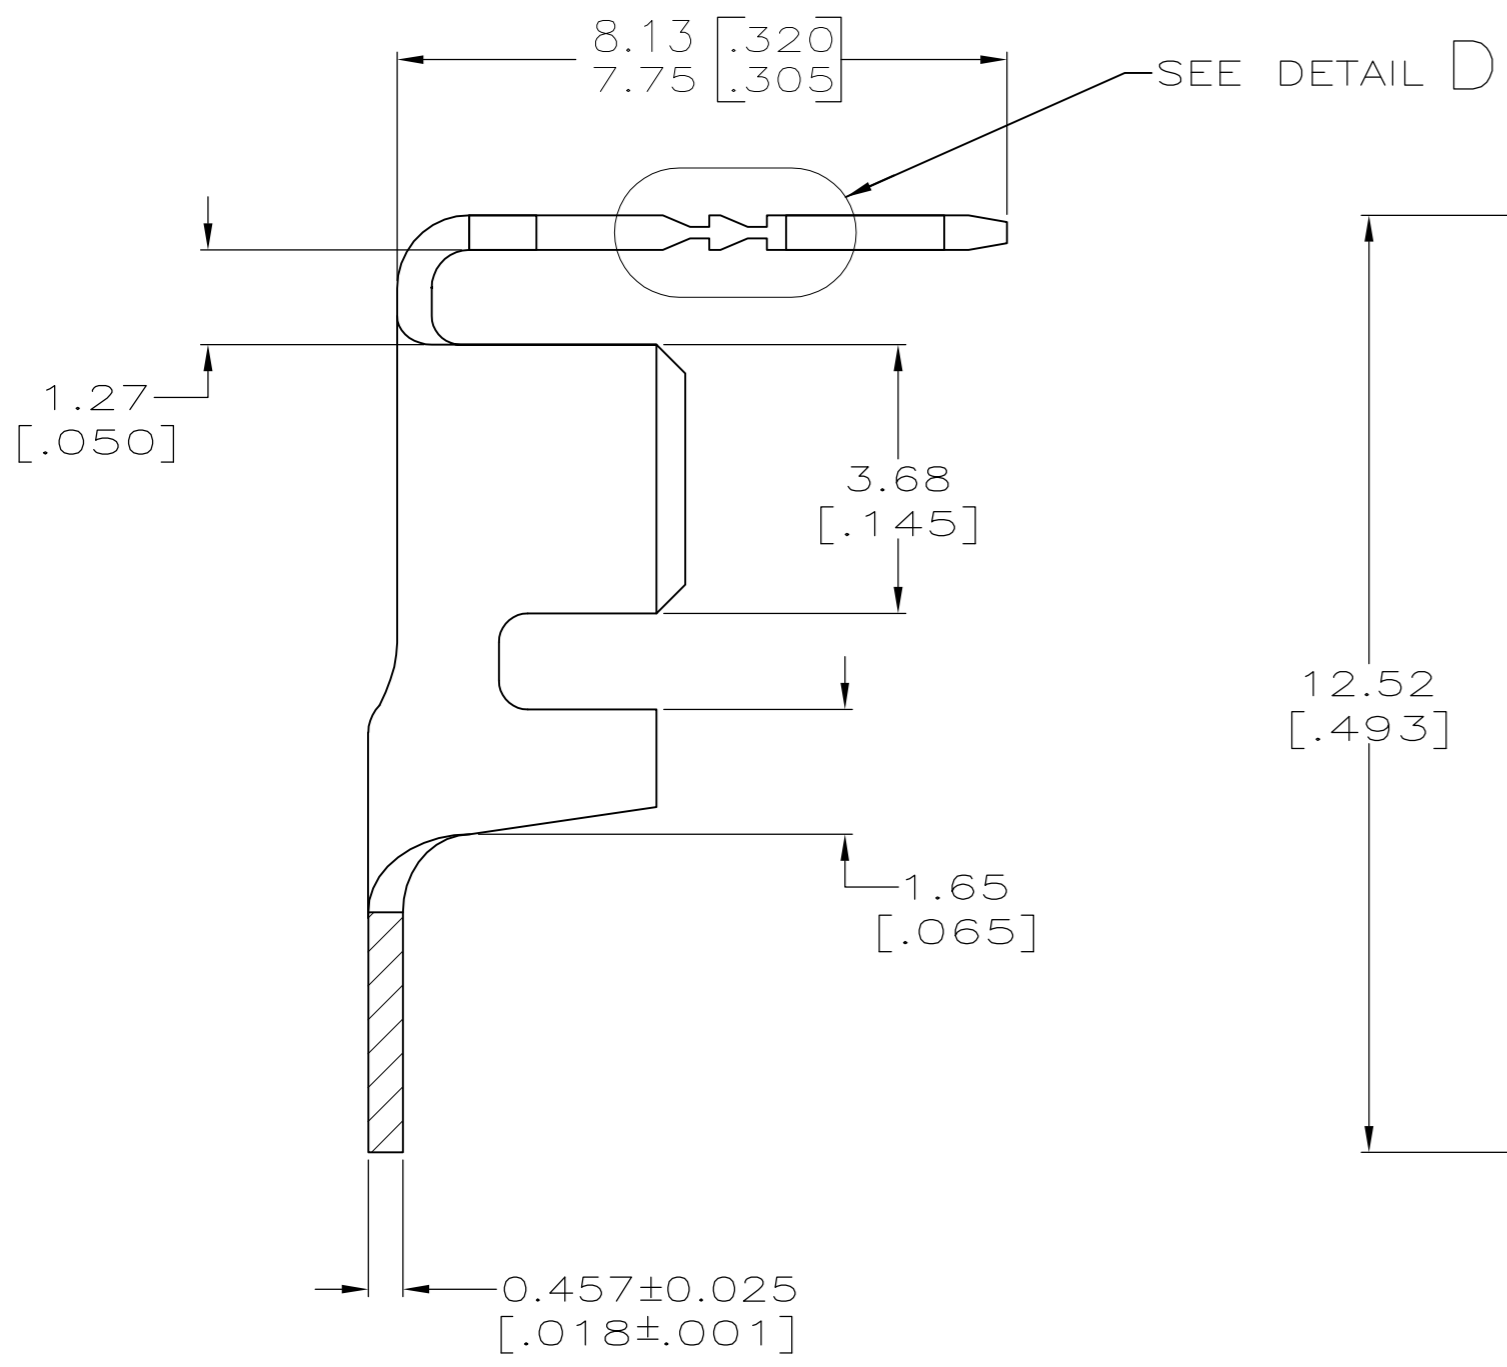


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AF	50	G2	ECR-13-017177	05NOV13	PKS	RRP	

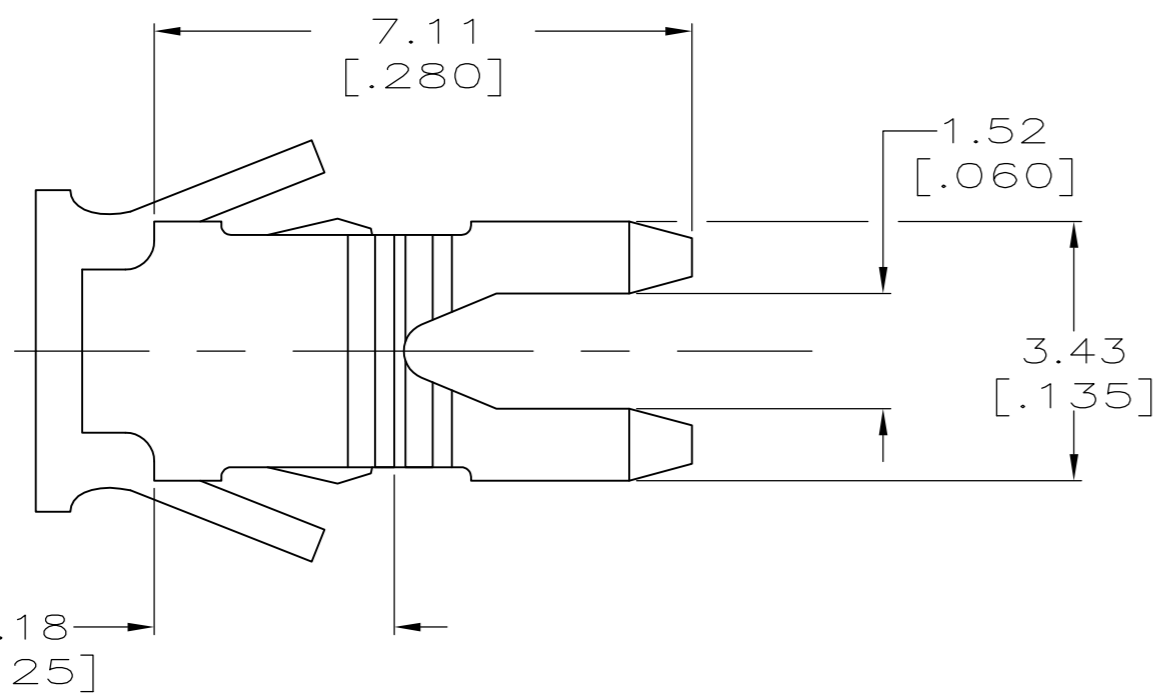


SECTION B-B

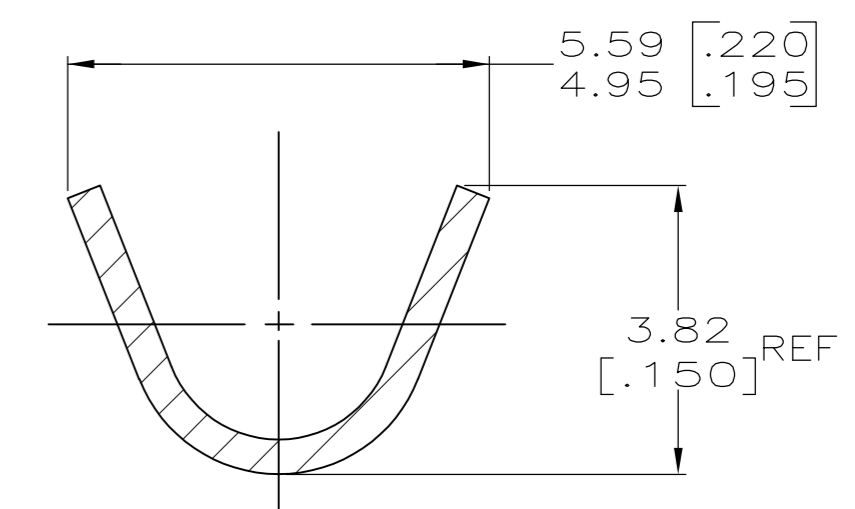

SECTION C-C

- 1 CONTINUOUS STRIP ON REELS.
- 2 FOR OPTIMUM RETENTION IN POKE-IN TYPE MAG-MATE TERMINALS. THE SERRATIONS AS SHOWN MUST BE ENGAGED WITH THE EDGE OF THE LEAF.

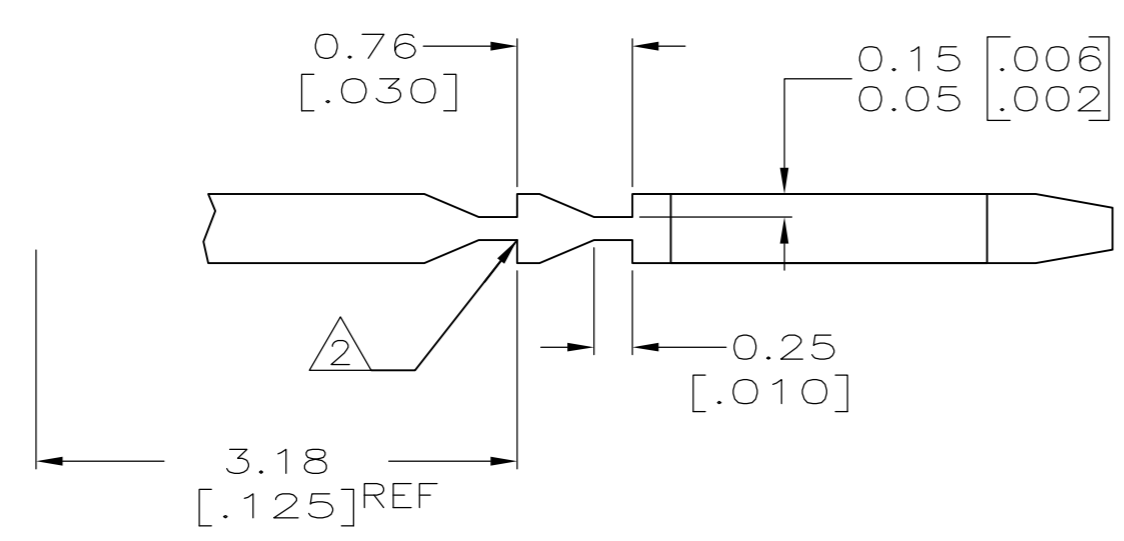

DETAIL D
SCALE 20:1

2.29-3.36 DIA [.090-.140]	#18-#14 AWG	63218-1
INSULATION RANGE	WIRE RANGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN MICHAEL S. FEHER 06DEC1999	TE Connectivity	
DIMENSIONS: mm		CHK KURT A. RANDOLPH 07DEC1999	NAME TAB, POKE-IN, MAG-MATE™	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.25[.010] 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD KURT A. RANDOLPH 07DEC1999	PRODUCT SPEC 108-22045	
MATERIAL BRASS		FINISH PRE-TIN PLATED	APPLICATION SPEC 114-2050	RESTRICTED TO -
WEIGHT -		SCALE 10:1	CAGE CODE A2 00779	DRAWING NO C=63218
CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1	REV G2