

Interface module - VIP-2/PT/HD15SUB/M - 2904268


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with push-in connections and high density D-SUB miniature pin-strip, for mounting on NS 35 rails, no. of pos.: 15



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 814775
GTIN	4046356814775

Technical data

Dimensions

Width	46.9 mm
Height	72.1 mm
Depth	46.6 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Nominal voltage U_N	25 V AC
	60 V DC
Max. perm. current (per branch)	1 A
Number of positions	15
Status display	No
Mounting position	any

Connection data

Connection name	Field level
Connection in acc. with standard	IEC / EN

Interface module - VIP-2/PT/HD15SUB/M - 2904268

Technical data

Connection data

Connection method	Push-in connection
Stripping length	8 mm
Screw thread	M3
Number of positions	15
Conductor cross section solid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Connection data 2

Connection name	Controller level
Connection method	High density D-SUB pin strip
Number of connections	1
Number of positions	15

Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	EN 50178
Rated surge voltage	1.2 kV
Degree of pollution	2
Overvoltage category	II


Environmental Product Compliance

	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Interface module - VIP-2/PT/HD15SUB/M - 2904268

Dimensional drawing

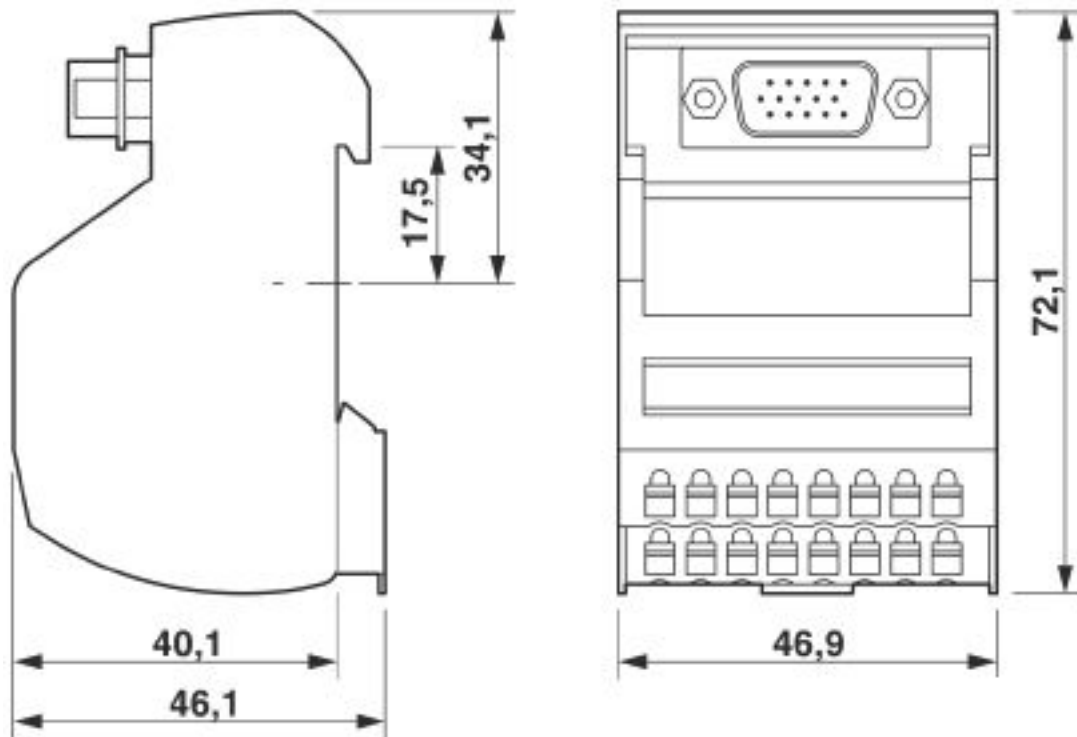

Interface module - VIP-2/PT/HD15SUB/M - 2904268

Circuit diagram

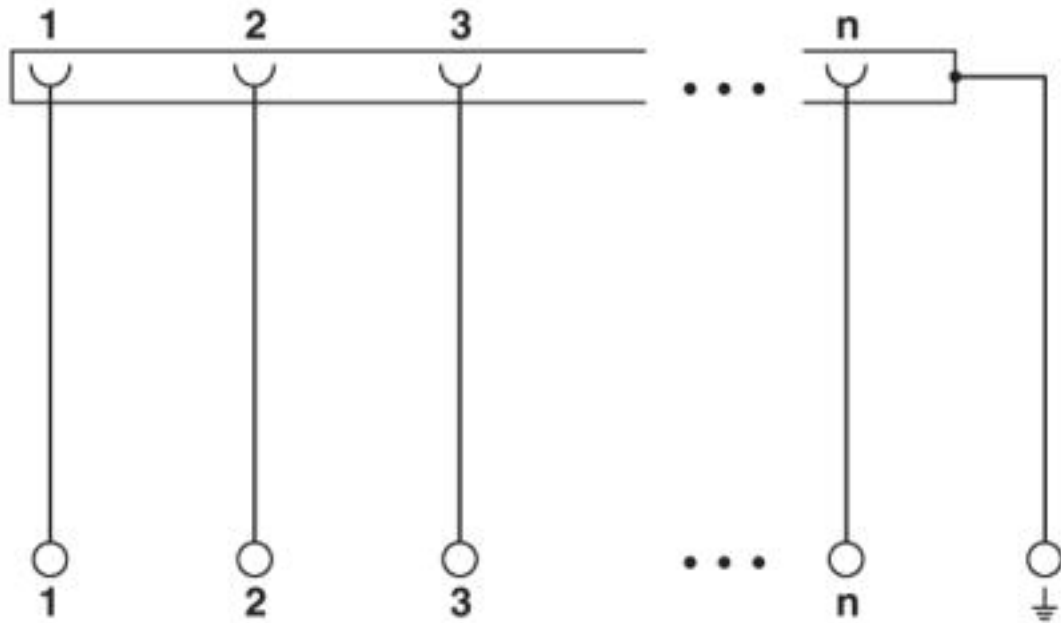

Universal circuit diagram

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / CSAus / EAC / cULus Recognized / cCSAus

Ex Approvals

Approval details

CSA		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN	105 V		
Nominal current IN	1 A		
mm ² /AWG/kcmil	26-14		

Interface module - VIP-2/PT/HD15SUB/M - 2904268

Approvals

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN	125 V		
Nominal current IN	1 A		
mm ² /AWG/kcmil	26-14		

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN	125 V		
Nominal current IN	1 A		
mm ² /AWG/kcmil	26-14		

CSAus		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN	105 V		
Nominal current IN	1 A		
mm ² /AWG/kcmil	28-14		

EAC		RU C- DE.A*30.B.01742
-----	--	--------------------------

cULus Recognized	
------------------	--

cCSAus	
--------	--

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>