





Data sheet | Item number: 756-5311/060-015

Sensor/Actuator cable; M12A plug; straight; 5-pole; Length: 1.5 m

www.wago.com/756-5311/060-015

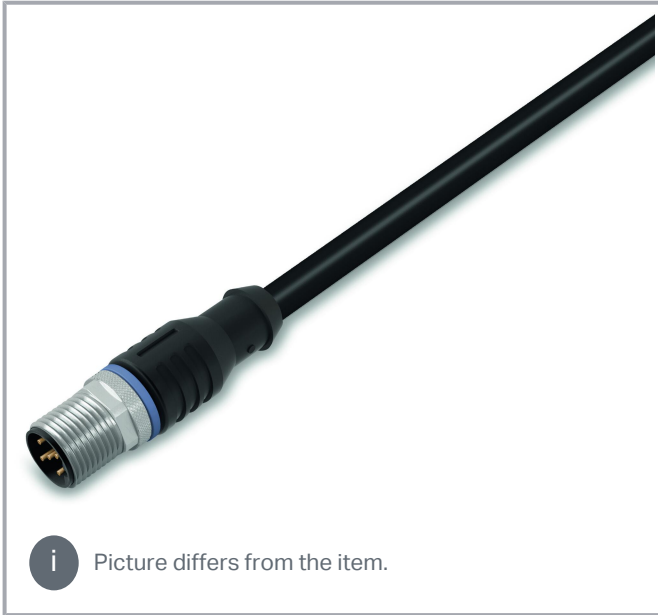

i Picture differs from the item.

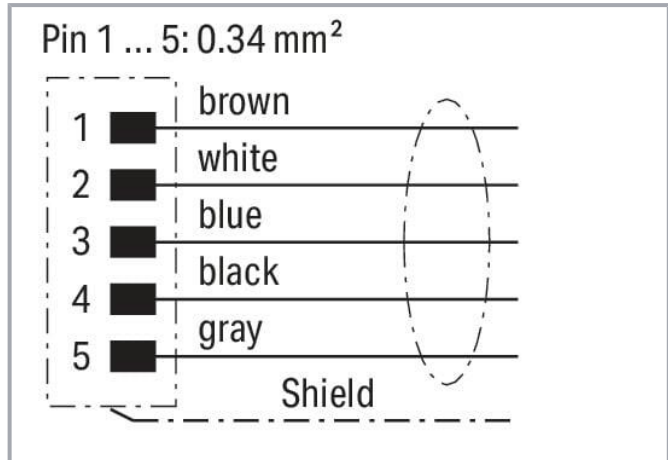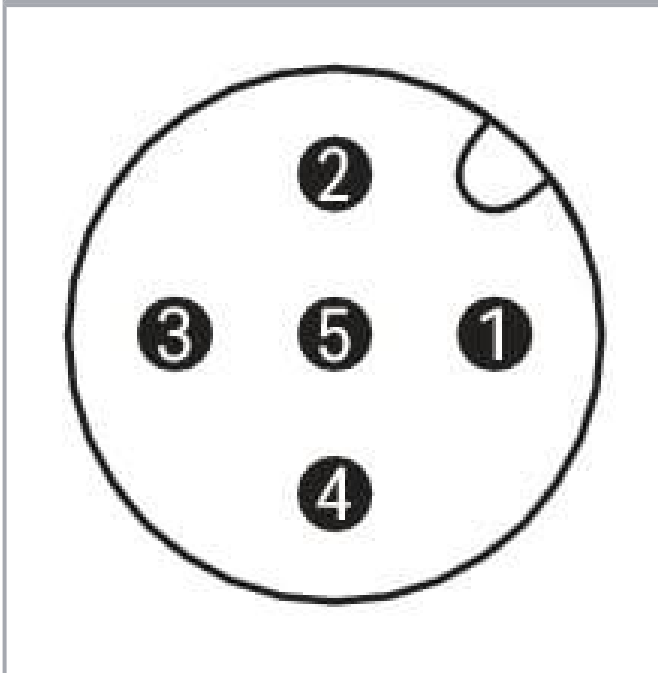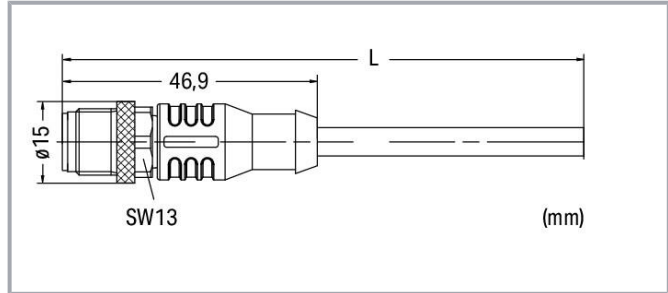

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Data

Technical data

General

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	1.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	1.5 m
Type code	LiF9YH-11YH or LiF9YC11YFHF

Subject to changes. Please also observe the further product documentation!



Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	6.3 ... 6.7 mm

Connector

Connection type	M12 plug - free end
Cable connection direction to mating direction	0°
Connector interface coding (cable/adapter) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454942168
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	f1fa25fd-69c1-4c00-8eb5-b308ed12a848
SCIP notification number (Belgium)	4d1f664a-662f-46ed-93c5-e083d89d9c90
SCIP notification number (Bulgaria)	47efc5d9-d36a-4725-834a-6ac5a4ad706a
SCIP notification number (Czech Republic)	9f53902f-247f-4b65-a309-2480f79d47c0
SCIP notification number (Denmark)	f8548a53-b68c-4fd5-8039-29f6e662ffbe
SCIP notification number (Finland)	28a0e434-9385-4d67-8531-adb17b053e68

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com


Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (France)	d0f3e422-771e-49fe-9b2a-15d9ac2d167a
SCIP notification number (Germany)	d73dda6f-c470-47f5-b9df-5acc62e5c7c3
SCIP notification number (Hungary)	53cc8e5c-7040-40ab-979c-361b7318a5ec
SCIP notification number (Italy)	f2e7c99b-ae0d-4c9b-839f-9d58aea6c5ec
SCIP notification number (Netherlands)	271c0e25-4480-43f4-8ffe-60a26f7519d5
SCIP notification number (Poland)	2b75d1bf-8c61-4674-8e1f-b61741d06bff
SCIP notification number (Romania)	3f29541b-a0eb-4d59-8be8-96c3cd58d39a
SCIP notification number (Sweden)	c7f40084-8e17-401d-aab0-19687b56e6a9

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5311/060-015 X81 - Datei	2019 Feb 19	xml 3.4 kB	Download
756-5311/060-015 doc - Datei	2017 Sep 20	doc 27.6 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5311/060-015	URL	Download
WSCAD Universe 756-5311/060-015	URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5311/060-015	URL	Download
Sensor/Actuator cable; M12A plug; straight; 5-pole; Length: 1.5 m		

Installation Notes

Subject to changes. Please also observe the further product documentation!