


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | NOTES |
|----------|-------------|---|------|----------------|
| 1 | TLY-13 | NEMA 5-15P | 1 | white overmold |
| 2 | TLY-18L | C13, 90° | 1 | white overmold |
| 3 | 30-00245 | Wire, 3C, 18 AWG, UL SVT, 300V, 105°C, 6.3 mm, VW-1, PVC, white | 1 | |

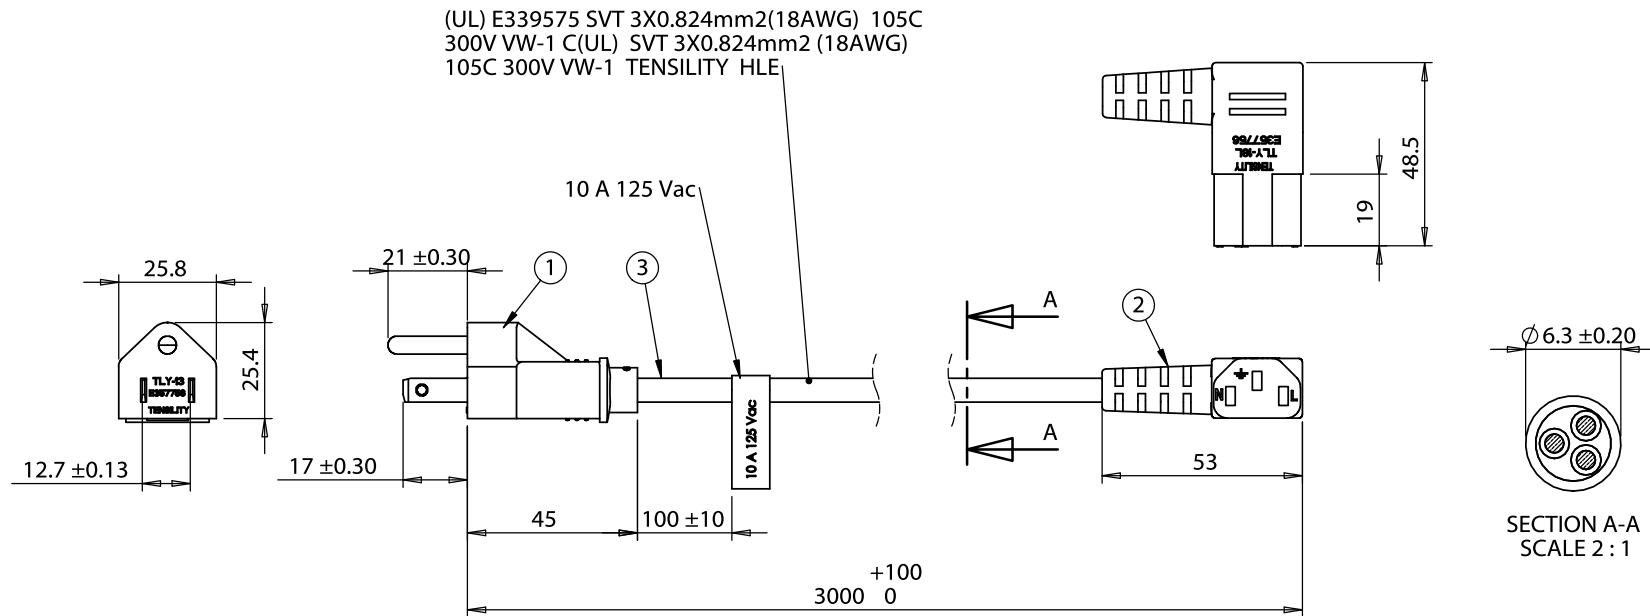

| | | | | | | |
|----------|-----------|-----------------|---|---|---|--------------------------------|
| Revision | Date | Description | Prepared by: AG 2014.08.28 11:06:46 -07'00' | Notes: Rated for 10 A at 125 Vac RoHS compliant Function test: no open, no reversed polarity, no short circuit, no INT | TENSILITY 20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com | |
| A | 8/28/2014 | Initial release | Verified by: JM 2014.08.29 14:33:41 -07'00' | | | |
| | | | DIMENSIONS ARE IN MILLIMETERS TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Ac cord, 3000 mm, U.S, NEMA 5-15P plug, TLY-13 to 90° C13, TLY-18L, 18 AWG, SVT, 30-00245, white | SIZE A | Part number 11-00078 |
| | | | | | SCALE: 1:2 | WEIGHT: SHEET 1 OF 1 |