



3T8W_1.5RP series

3W - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

DC-DC Converter 3 Watt

- ⊕ Wide input range (2:1)
- ⊕ Ultra compact SMD package
- ⊕ 1.5kVDC isolation
- ⊕ High efficiency up to 80%
- ⊕ RoHS Compliance
- ⊕ Short circuit protection (SCP)
- ⊕ Operating temperature range: -40°C ~ +85°C
- ⊕ International standard pinout
- ⊕ No external component required
- ⊕ EN62368, UL62368 approved

The 3T8W_1.5RP Series is specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage range $\leq 2:1$);
- 2) Where isolation is necessary between input and output (Isolation Voltage $\leq 1500\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

The ultra-small volume design makes the converters an ideal solution for communications, instrumentation and industrial electronics applications.



UL-62368-1 (E347551)

Common specifications	
Short circuit protection:	Continuous
Cooling:	Free air convection
Operation temperature range:	-40°C~+85°C
Storage temperature:	-55°C~+125°C
Storage humidity range:	< 95% non-condensing
Pin soldering resistance temperature:	300°C MAX, 1.5mm away from case for 10s.
Reflow soldering temperature:	Peak temperature $\leq 245^\circ\text{C}$, duration $\leq 60\text{s}$ max. over 217°C . see also IPC/ JEDEC J-STD-020D.1.
Case material:	Black flame-retardant, heat-resistant plastic
MTBF (MIL-HDBK-217F@25°C):	>1,000,000 hours
Weight:	2.2g
Dimensions:	14.00 × 14.00 × 9.00 mm

Output specifications						
Item	Test condition	Min	Typ	Max	Units	
Voltage accuracy	5%-100% load, input voltage range		±1	±3	%	
No load output voltage accuracy	input voltage range • 3.3VDC output • others		±5	±7	%	
			±1.5	±5	%	
Line regulation	Input voltage from low to high @full load		±0.2	±0.5	%	
Load regulation	5%-100% load		±0.5	±1	%	
Temperature drift	100% full load			±0.03	%/°C	
Transient recovery time	25% load step change		1	3	ms	
Transient response deviation	25% load step change		±2.5	±5	%	
Switching frequency	Full load, nominal input		100		KHz	

Input specifications					
Item	Test condition	Min	Typ	Max	Units
Input current (full load/no load)	• 12VDC		314/30	338/50	mA
	• 24VDC		154/20	163/40	
Reflected ripple current	• 12VDC		40		mA
	• 24VDC		55		
Surge voltage (1sec. max)	• 12VDC	-0.7		25	VDC
	• 24VDC	-0.7		50	
Start-up voltage	• 12VDC			9	VDC
	• 24VDC			18	
Input Filter	Capacitance filter				
Hot plug	unavailable				

EMC specifications					
EMI	CE	CISPR32/EN55032 CLASS B (See EMC recommended circuit, ②)			
EMI	RE	CISPR32/EN55032 CLASS B (See EMC recommended circuit, ②)			
EMS	ESD	IEC/EN61000-4-2	Contact ±6KV	perf. Criteria B	
EMS	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A	
EMS	EFT	IEC/EN61000-4-4	±2KV	perf. Criteria B (External Circuit Refer to recommended circuit, ①)	
EMS	Surge	IEC/EN61000-4-5	line to line ±2KV	perf. Criteria B (External Circuit Refer to recommended circuit, ①)	
EMS	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A	

Isolation specifications					
Item	Test condition	Min	Typ	Max	Units
Isolation voltage	Input-output electric Strength test for 1 min. with a leakage current of 1mA max.	1500			VDC
Isolation resistance	500VDC	1000			MΩ
Isolation capacitance	100KHz/0.1V		100		pF

Example:

3T8W_1205S1.5RP

3 = 3Watt; T8 = SMT8; W = Wide input; 12Vin; 5Vout; S = Single output; 1.5 = 1.5kVDC; R = Regulated output; P = Short circuit protection (SCP)

Note:

1. Unless otherwise specified, data in this data sheet should be tested under the conditions of $T_a = 25^\circ\text{C}$, nominal input voltage and rated output current;
2. The maximum capacitive load offered was tested at input voltage range and full load;
3. All index testing methods in this datasheet are based on our Company's corporate standards.
4. We can provide product customization service, please contact our technicians directly for specific information.


3T8W_1.5RP series

3W - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

Part Number	Input Voltage Range [V]	Output Voltage [VDC]	Output current [mA, max/min]	Ripple & Noise [mVp-p; typ/max]	Efficiency [%; min/typ]	Capacitive load [μ F]
3T8W_1203S1.5RP	9-18	3.3	758/38	50/100	73/75	2700
3T8W_1205S1.5RP	9-18	5	600/30	50/100	77/79	2200
3T8W_1212S1.5RP	9-18	12	250/13	50/100	80/82	680
3T8W_1215S1.5RP	9-18	15	200/10	50/100	81/83	470
3T8W_1224S1.5RP	9-18	24	125/6	50/100	79/81	330
3T8W_2403S1.5RP	18-36	3.3	758/38	50/100	72/74	2700
3T8W_2405S1.5RP	18-36	5	600/30	50/100	79/81	2200
3T8W_2412S1.5RP	18-36	12	250/13	50/100	81/83	680
3T8W_2415S1.5RP	18-36	15	200/10	50/100	81/83	470
3T8W_2424S1.5RP	18-36	15	125/6	50/100	81/83	330


Typical characteristics

Temperature derating graph

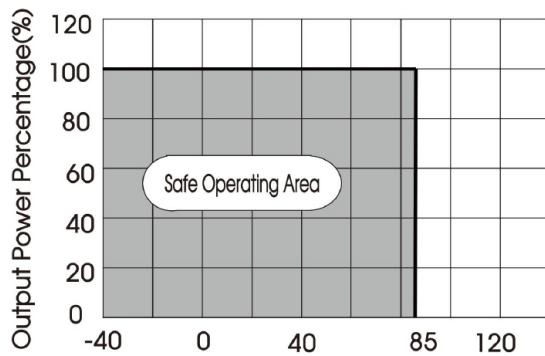


Efficiency


Efficiency Vs Input Voltage (Full Load)

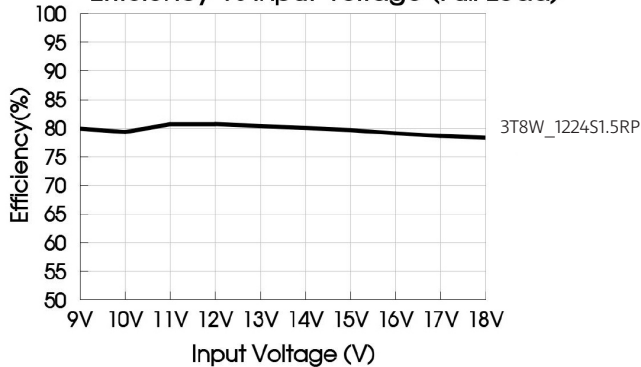


Efficiency Vs Output Load (Vin=12V)

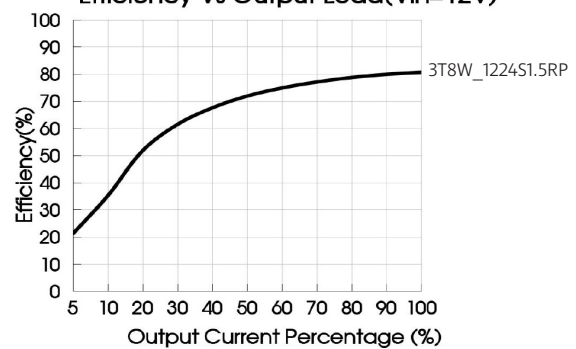

Efficiency Vs Input Voltage (Full Load)

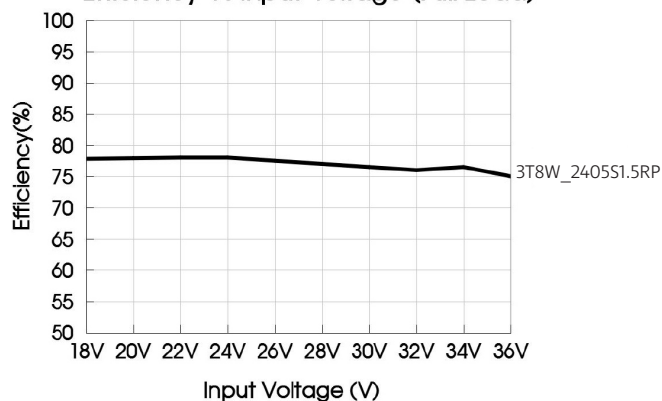

Efficiency Vs Output Load (Vin=24V)

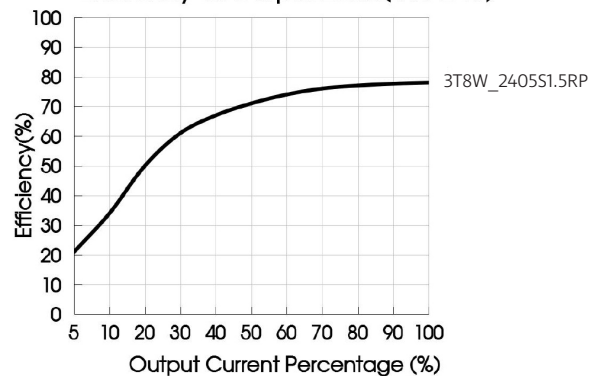

3T8W_1.5RP series

3W - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

Recommended circuit


All the DC/DC converters of this series are tested before delivery using the recommended circuit shown below. Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} , connecting a "Y" capacitor between input "GND" and output "0V", and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the max. capacitive load value of the product.



Vin(VDC)	12	24
Cin	47uF/25V	47uF/50V

Vo(VDC)	3.3, 5	12, 15, 24
Cout	100uF/6.3V	27uF/35V

EMC compliance circuit

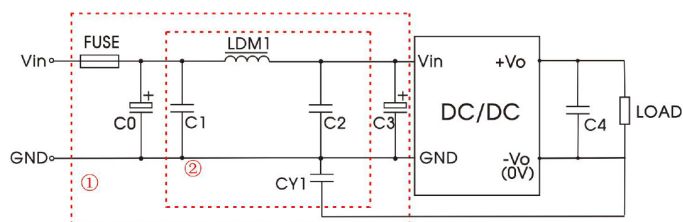


Part	12VDC	24VDC
FUSE	slow blow, choose according to actual input current	
C0	1000μF/25V	680μF/50V
C1	4.7μF/50V	
LDM1	15μH	
C2	4.7μF/50V	
C3	330μF/50V	
CY1	1nF/2KV	
C4	Refer to the Cout in recommended circuit	

Input current

When the electricity is provided by the unstable power supply, please make sure that the range of the output voltage fluctuation and the ripple voltage of the power supply do not exceed the indicators of the modules. Input current of power supply should afford the flash startup current of this kind of DC/DC module (see Fig. on the right).

Generally: Vin = 12V series Iave = 205mA
 Vin = 24V series Iave = 104mA




Output load requirements

When using, the minimum load of the module output should not be less than 5% of the nominal load. In order to meet the performance parameters of this datasheet, please connect a 5% dummy load in parallel at the output end, the dummy load is generally a resistor, please note that the resistor needs to be used in derating.

3T8W_1.5RP series

3W - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

Mechanical dimensions

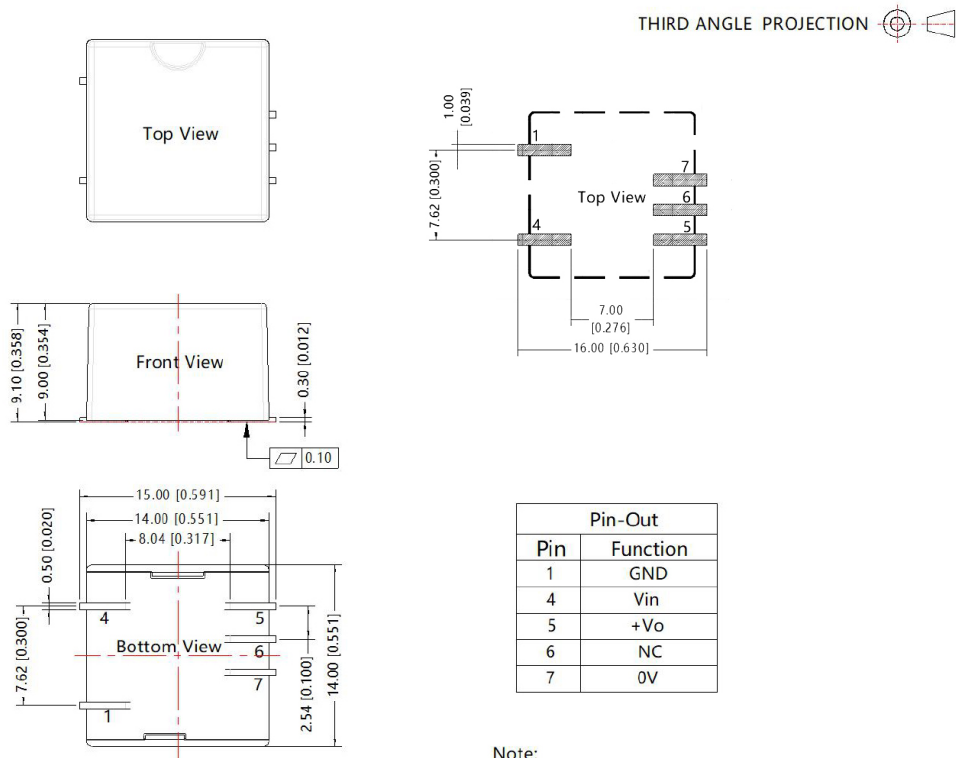

Note:

Unit: mm[inch]

Pin diameter tolerances: $\pm 0.10[\pm 0.004]$

General tolerances: $\pm 0.50[\pm 0.020]$