

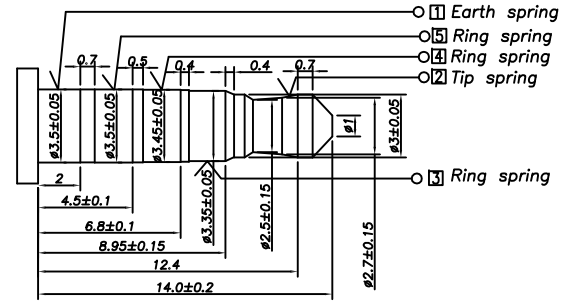
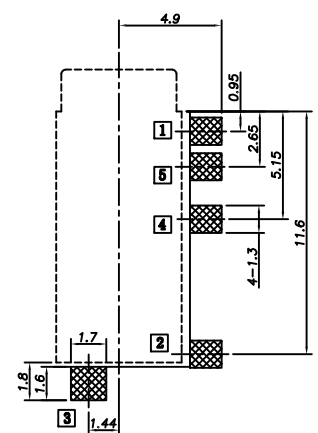

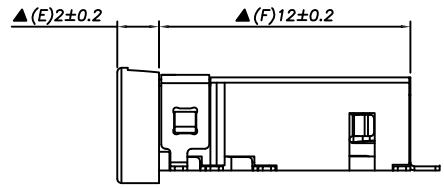



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/18	



APPROVED: _____
DATE: _____ TITLE: _____

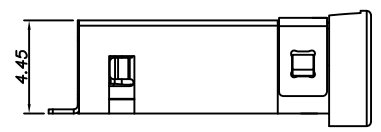

MATE PLUG

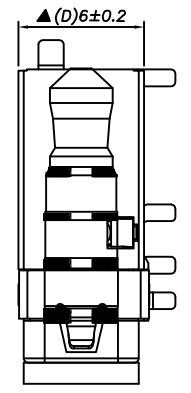

RECOMMENDED PCB LAYOUT
(COPPER SIDE)

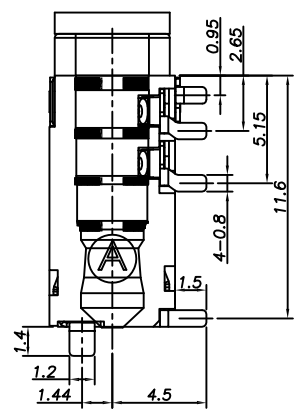

SPECIFICATIONS:

Material:
Housing: Hi-Temp Thermoplastic, rated UL94V-0, Color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Rating: 30VDC, 0.5A
Contact Resistance: 30 mohm max.
Insulation Resistance: 100 Mohm min. @ 500 VDC
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
Operating temperature: -20°C to +70°C
Environmental:
Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		
MM	ANGLE	
± 0.25	± 2°	
APPROVALS		DATE
DRAWN	HR	11/16/18
CHECKED	AC1	11/16/18
APPROVED		

	909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
	TITLE 3.5MM STEREO PHONE JACK, RIGHT ANGLE, SMT	
SIZE X	PART NO. ASJ-196-K-T/R	REV. -
REF: S00002C	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1

D

C

B

A

D

C

B

A

6 5 4 3 2 1