

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	39014041	MiniFit Jr Rec Hsg SR V-0 4Ckt	2	PC
C	39000089	MiniFit Term Crp Fem Chn Bs 30Au 16awg	8	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B4	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	B3	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	B2	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	B1	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

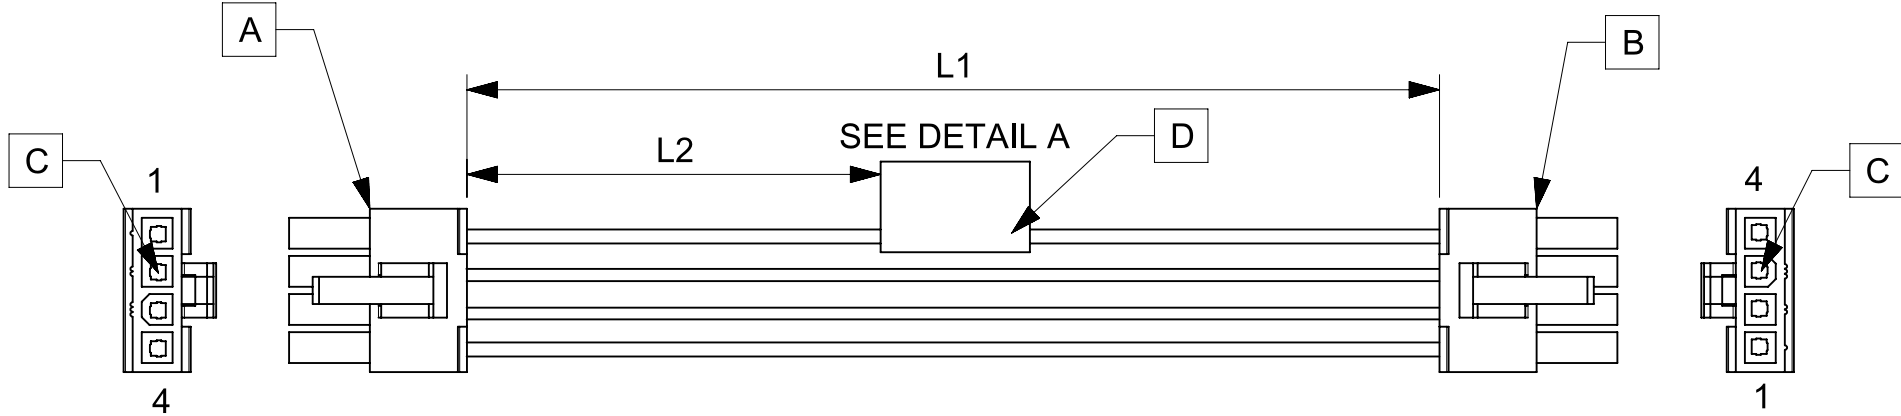


TABLE			
PART NUMBER	L1	L2	TITLE
2153202041	150±8	63 REF	MINIFIT JR SR R-R 4 CIRCUIT 150MM Au
2153202042	300±10	138 REF	MINIFIT JR SR R-R 4 CIRCUIT 300MM Au
2153202043	600±10	288 REF	MINIFIT JR SR R-R 4 CIRCUIT 600MM Au

**NOTES**

1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU
2020/09/08	A1	DESCRIPTION CHANGED	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	DIMENSION UNITS: <b>mm</b> SCALE: <b>NTS</b>		CURRENT REV DESC:					
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 647686 DRWN: ARAJU    2020/09/08 CHK'D: RDESAI01    2020/10/23 APPR: RDESAI01    2020/10/23					
	ANGULAR TOL ± °		INITIAL REVISION:			PRODUCT CUSTOMER DRAWING		
	4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±		DRWN: ARAJU    2020/03/05 APPR: RDESAI01    2020/05/28			DOCUMENT NUMBER: <b>2153202041</b> DOC TYPE: PSD    DOC PART: 000    REVISION: A1		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING: A4-SIZE	SERIES: 215320	MATERIAL NUMBER: SEE TABLE	CUSTOMER: GENERAL MARKET	SHEET NUMBER: 1 OF 1