


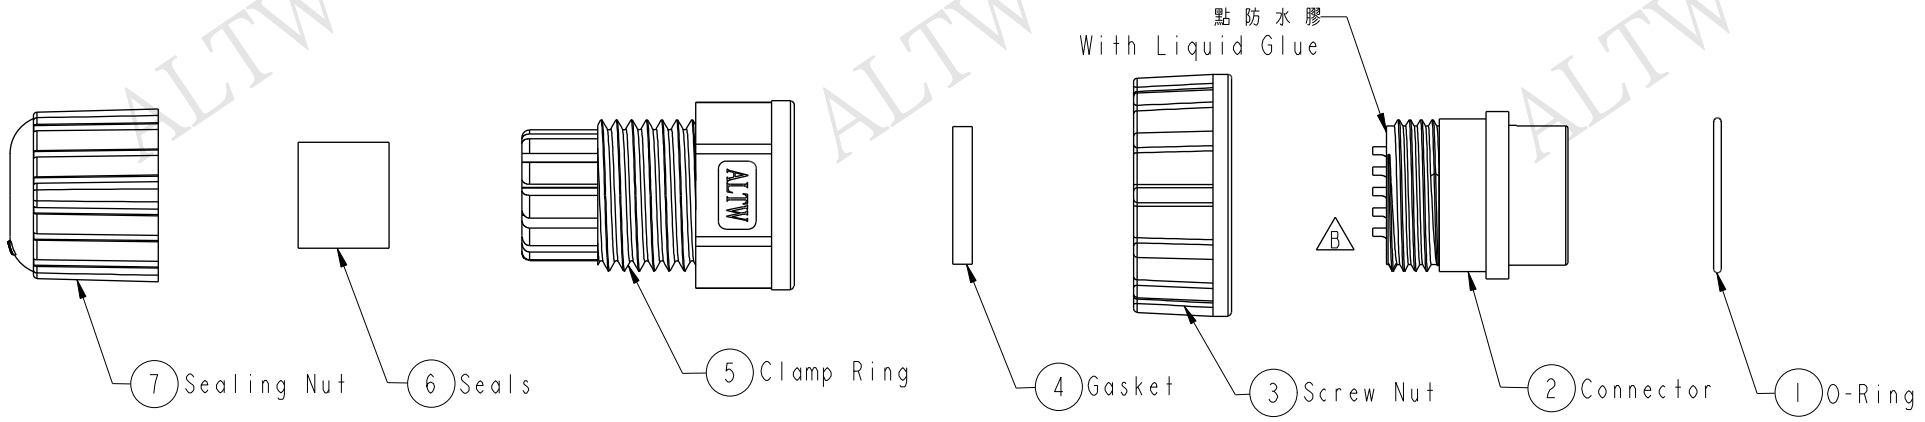



| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|------------|------------|------|------------------------------|
| B | LEN-0C0606 | 2010/11/26 | Ivan | Change View |
| C | LEN14A0141 | 2014/10/13 | Sam | Modify Pin Assignments View. |

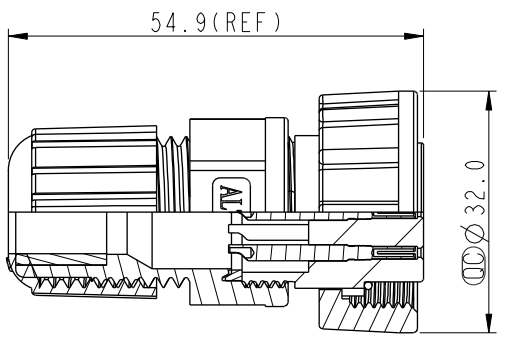

Note:

- * CC Important Dimension.
- * Waterproof Rate: IP67
- * Connector: 18Pin Female Conn, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Screw Nut: Nylon+GF, Black
- * O-Ring: EPDM, Black
- * Gasket: Silicone, Black
- * Sealing Nut: Nylon, Black
- * Clamping Ring: Nylon, Black
- * Seals: EPDM, Black
- * Seal For Cable OD: $\varnothing 5.5\text{mm} \sim 10.8\text{mm}$
- * One Set Unassembled In One PE Bag



| | | |
|-----------|---------------|--|
| UNIT: mm | | |
| TOLERANCE | | |
| .X | ± 0.25 | |
| .XX | ± 0.1 | |
| .XXX | ± 0.05 | |
| ANGLES | $\pm 1^\circ$ | |

| | | | |
|--|----------------|-------------------------------|--|
| TITLE Screw Type Connector For Field Installation 180° 18Pin Female Connector Female Pin(5A) | | | |
| SCALE 1:1 | SIZE A4 | SHEET 1 OF 1 | |
| REV. C | WC-REV. A.2 | CC : Inspection item | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | | |
|------------------------------|--------------------|--------------------|
| ITEM NO. DD-18BFFA-SL7001 | DRAWN BY Sam | DATE 2014-10-13 |
| DWG NO. DD-18BFFA-SL7001 | CHECKED BY Rita | DATE 2014-10-13 |
| CUSTOMER ALTW | APPROVED BY Win | DATE 2014-10-13 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.