

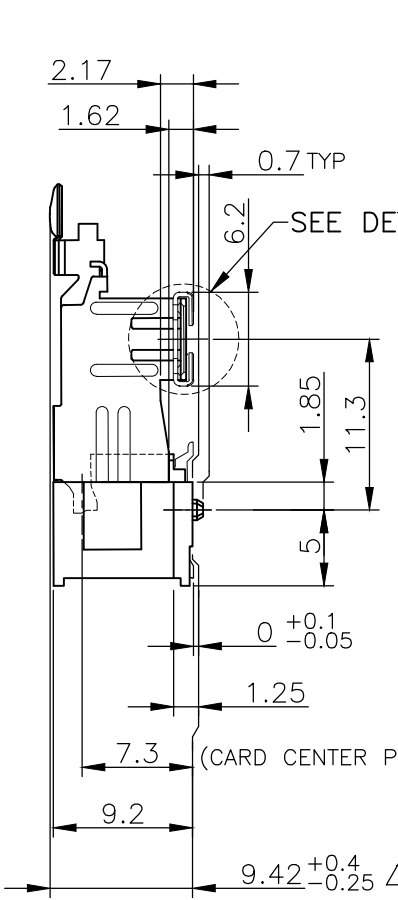
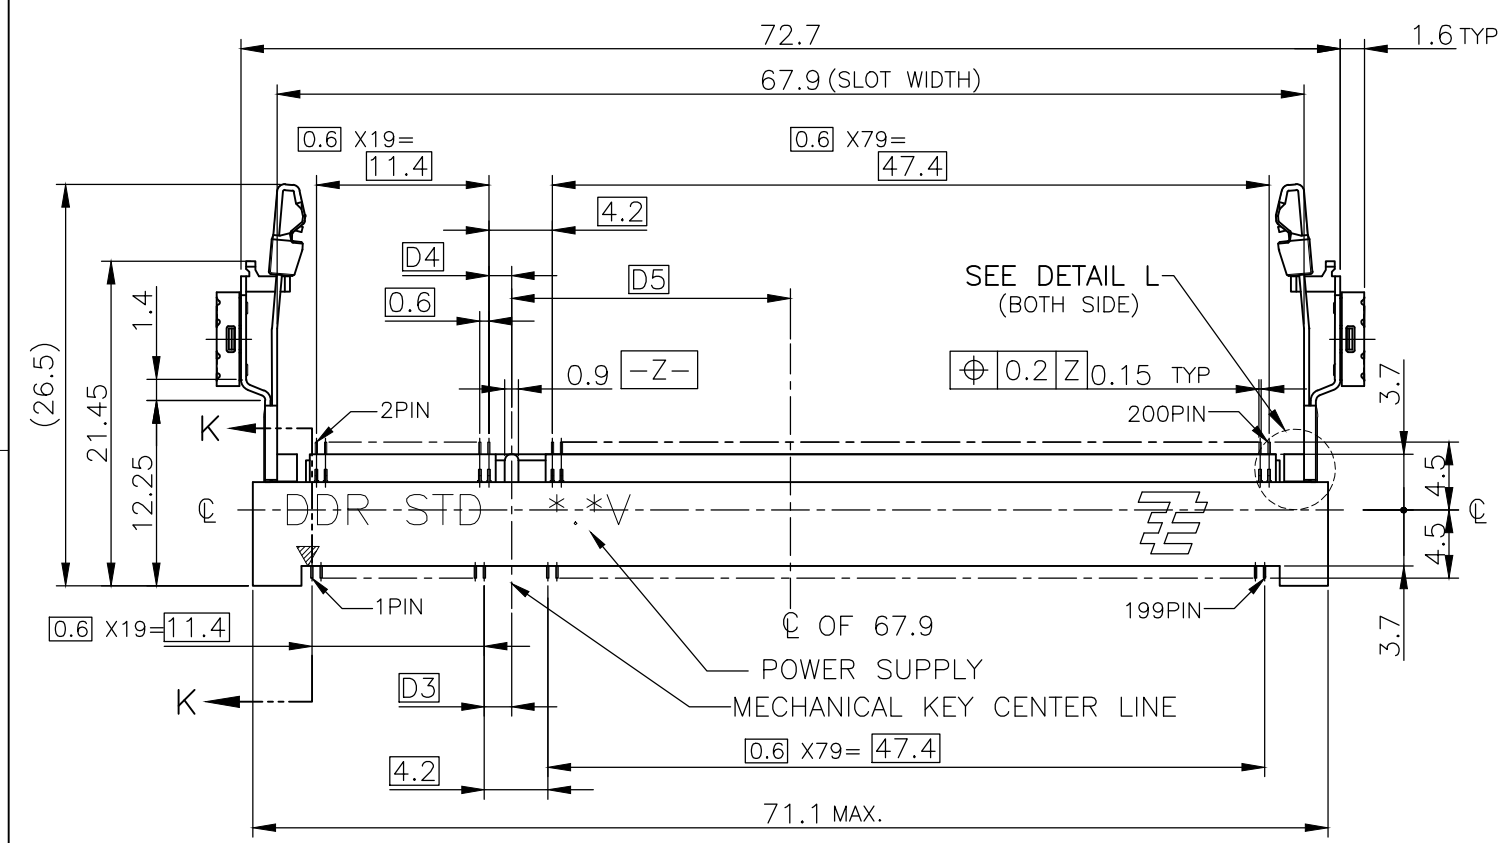
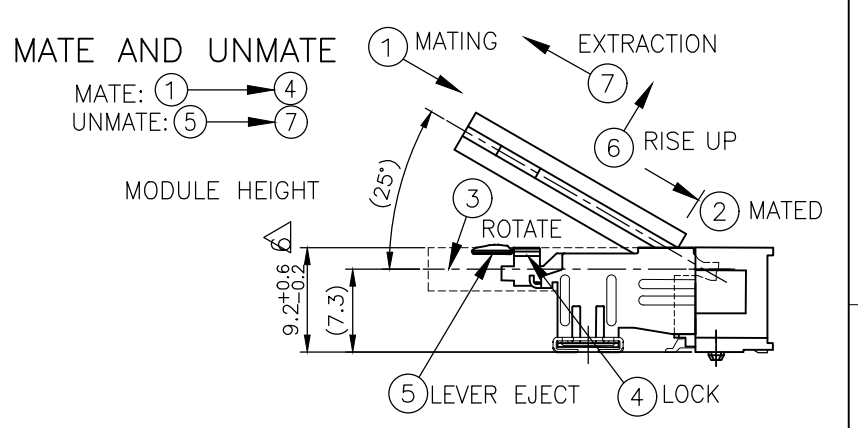
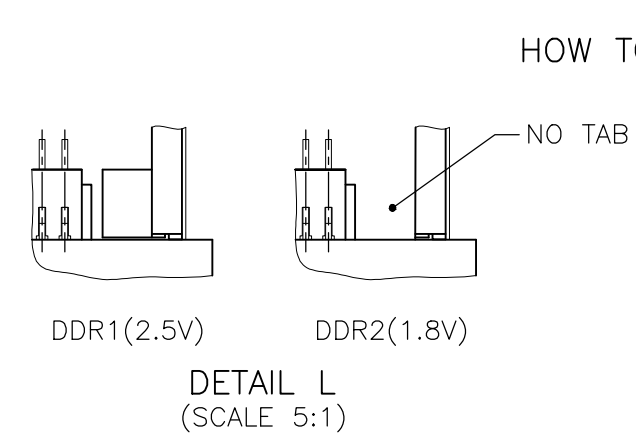
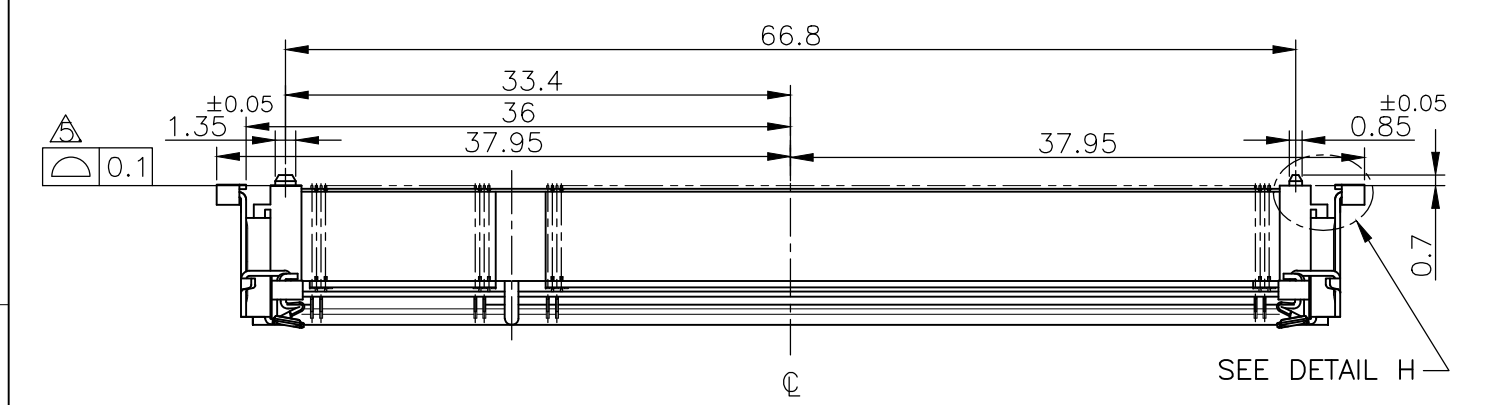
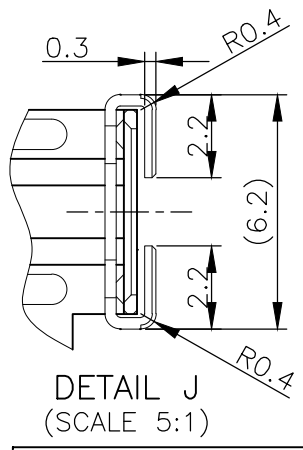


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E4	REVISED	18SEP17	DZ	SL

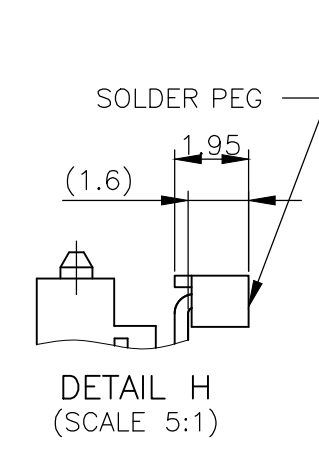

- (APPLIED TO SHEET 1-2)
- MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0  
 CONTACT: COPPER ARROY  
 LOCK LEVER: STAINLESS STEEL  
 SOLDER PEG: COPPER ARROY
  - FINISH ; CONTACT AREA: GOLD FLASH  
 ON 0.0013MIN ALL OVER NICKEL.  
 SOLDERING AREA: GOLD FLASH PLT.  
 SOLDER PEG: TIN PLATING.
- △ MECHANICAL KEY POSITION OF CONNECTOR SEE TABLE.  
 △ TOLERANCES NON-CUMULATIVE.  
 △ COPLANARITY : 0.1 MAX.  
 △ THE FLOATING VALUE BY SOLDERING IS NOT INCLUDED.  
 △ NOT MATING CONDITION.
- IF THE MODULE DOESN'T INSERT AND LOCK IN THE LATCH SMOOTHLY, OPEN WIDE BOTH LATCHES BY MANUAL. AND THE MODULE MUST BE INSERTED AND LOCKED IN THE LATCH.
  - THE SHAPE OF HOUSING AT KEY AREA IS FREE BASICALLY TO IMPROVE HOUSING WARPAGE

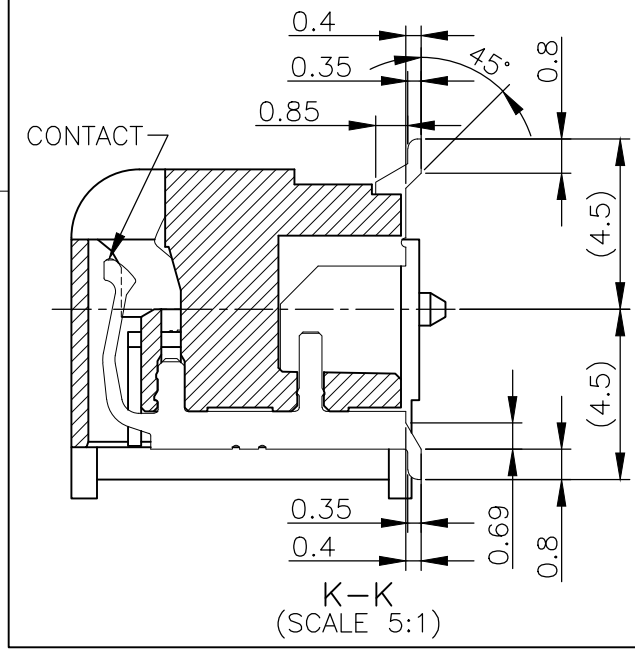


GENERAL TOLERANCE  
 10 ≥ : ±0.2  
 30 ≥ > 10: ±0.25  
 100 ≥ > 30: ±0.3  
 ANGLES: ±3°


TAPE&REEL	AVAILABLE	2.5V (DDR1)	18.45	1.5	1.8	200	2-1612618-1
TRAY	AVAILABLE	1.8V (DDR2)	17.55	2.4	2.7	200	1612618-4
TRAY	AVAILABLE	2.5V (DDR1)	18.45	1.5	1.8	200	1612618-1
PACKING TYPE	TOOLING STATUS	POWER SUPPLY (TYPE)	D5	D4	D3	POS	PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J.TANIGAWA 210CT02				
			CHK H.KODAMA 210CT02				
			APVD I.ENOMOTO 210CT02				
			PRODUCT SPEC				
DIMENSIONS: MM			TOLERANCES UNLESS OTHERWISE SPECIFIED.		NAME		
			0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± FINISH ±		DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH 200POS		
MATERIAL			WEIGHT		SIZE		RESTRICTED TO
			-		A3 00779 C-1612618		
CUSTOMER DRAWING			SCALE 2:1		SHEET 1 OF 5		REV E4

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

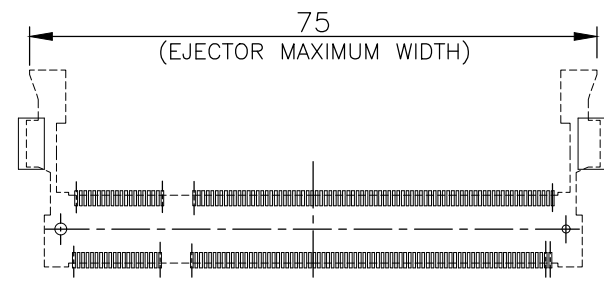

REAL SIZE (SCALE 1:1)

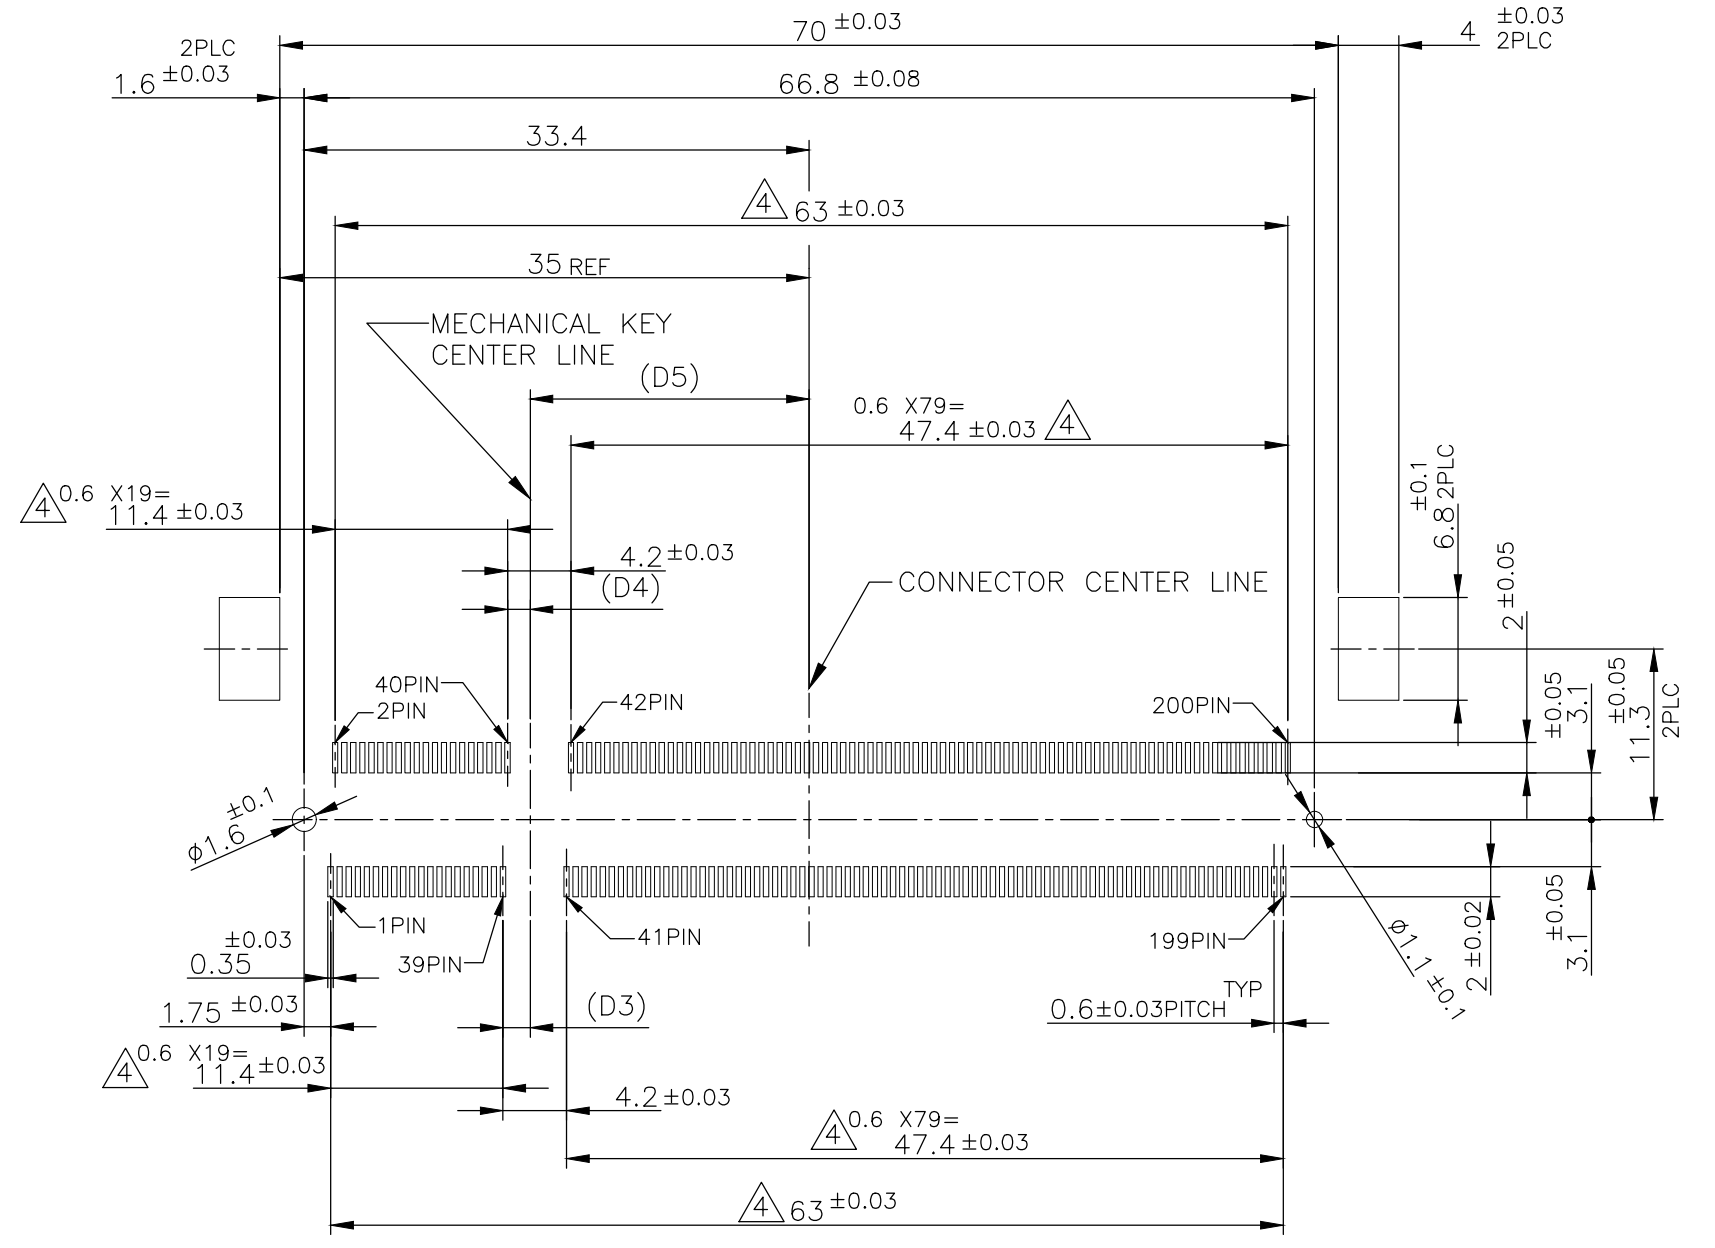


REFERENCE P.C. BOARD PATTERN LAYOUT FOR DUAL USE  
(CONNECTOR MOUNTING SIDE)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME	
0 PLC ± - 1 PLC ± - 2 PLC ± 3 PLC ± 4 PLC ± - ANGLES ± FINISH -		PRODUCT SPEC		DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH 200POS	
MATERIAL		APPLICATION SPEC		RESTRICTED TO	
		WEIGHT		SIZE CAGE CODE DRAWING NO	
		-		A3 00779 C-1612618	
		CUSTOMER DRAWING		SCALE NTS SHEET 2 OF 5 REV E4	

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.





REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

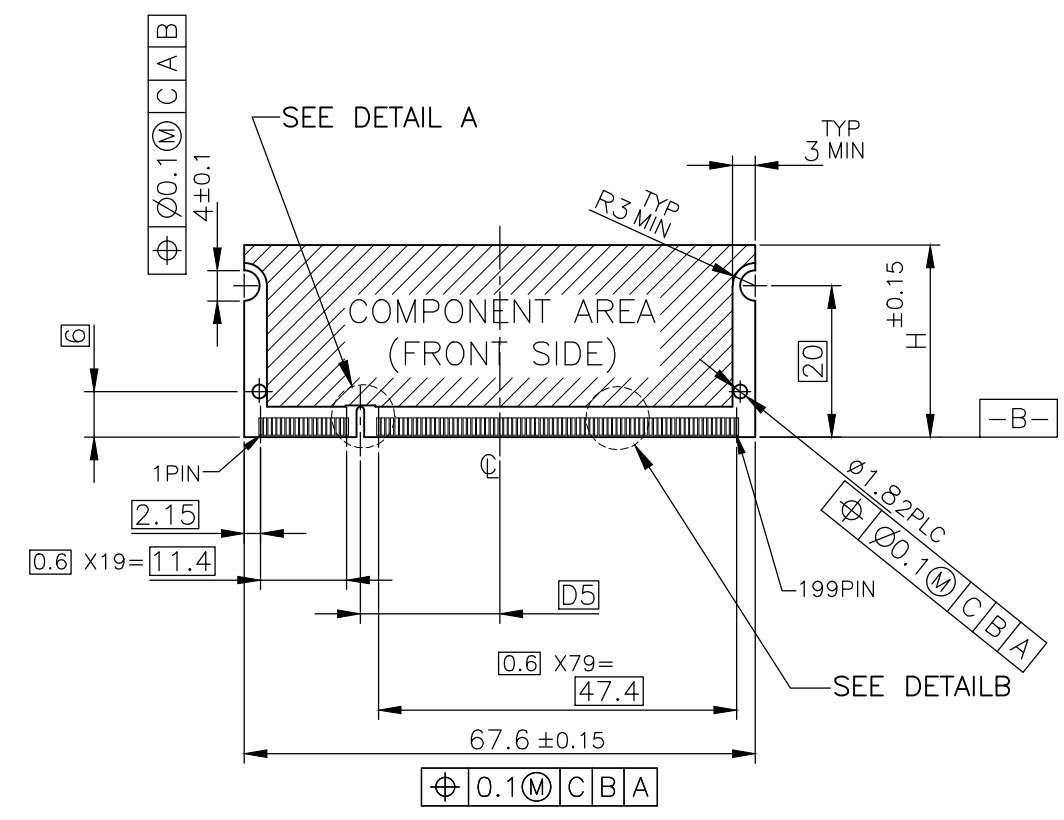

(APPLIED TO SHEET 3)

- 1 TOLERANCES ON ALL DIMENSIONS ±0.15 UNLESS OTHERWISE SPECIFIED.
- 2 P.C. BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.
- 3 FINISH OF PAD : GOLD PLATING 0.00076 MIN. OVER Ni PLATING 0.002MIN.

△ NO BURR.  
 △ CHAMFER 0.25 MAX x 45° IF EXIST.

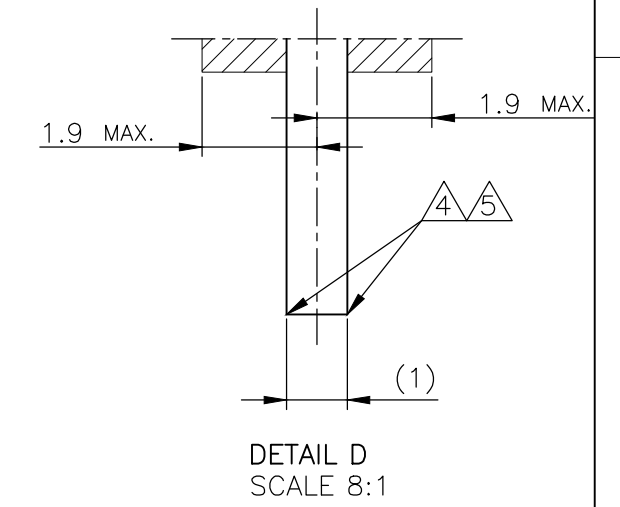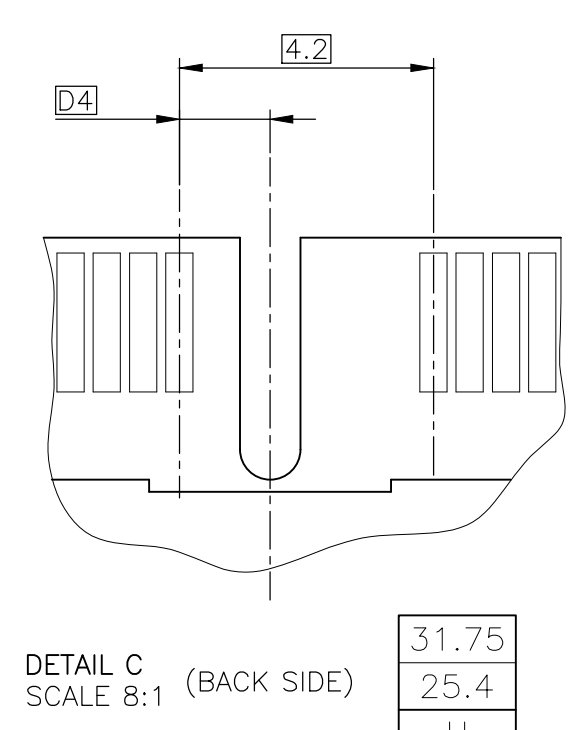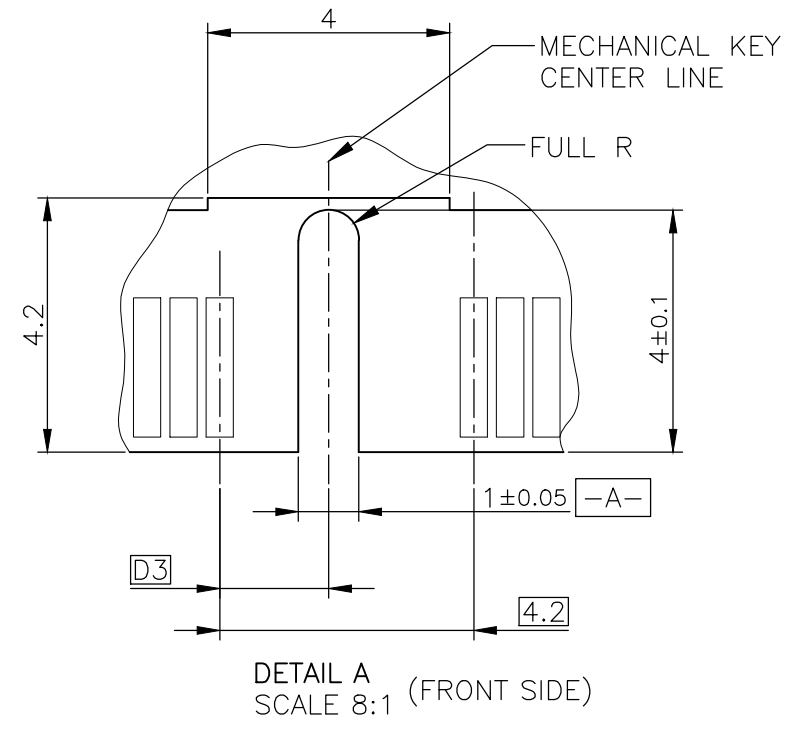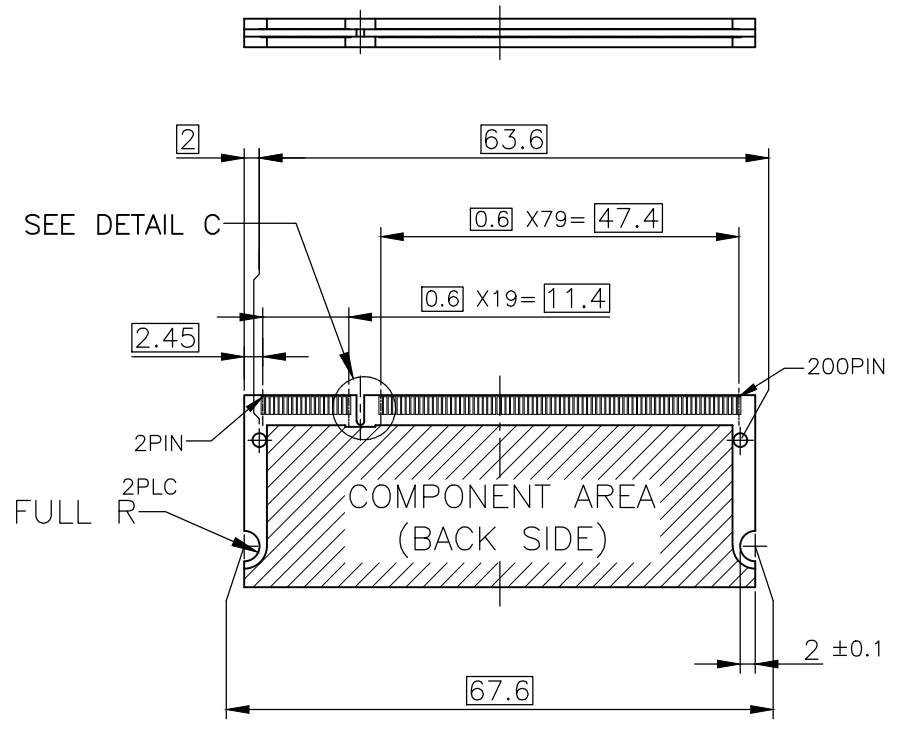

推奨基板仕様  
 RECOMMENDED MATING P.C.B CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN
DIMENSIONS: MM		CHK
TOLERANCES UNLESS OTHERWISE SPECIFIED.		APVD
0 PLC ± -		PRODUCT SPEC
1 PLC ± -		APPLICATION SPEC
2 PLC ±		WEIGHT
3 PLC ±		
4 PLC ± -		
ANGLES ±		
FINISH		

31.75	1.8V	17.55	2.4	2.7
25.4	2.5V	18.45	1.5	1.8
H	POWER SUPPLY	D5	D4	D3

<b>STE</b> TE Connectivity			
NAME			
DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH 200POS			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1612618	-
CUSTOMER DRAWING		SCALE NTS	SHEET 3 OF 5
		REV E4	

4




3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

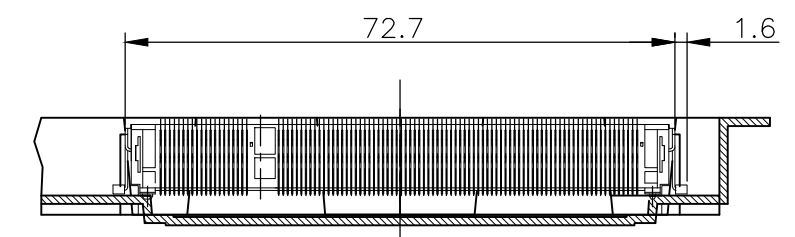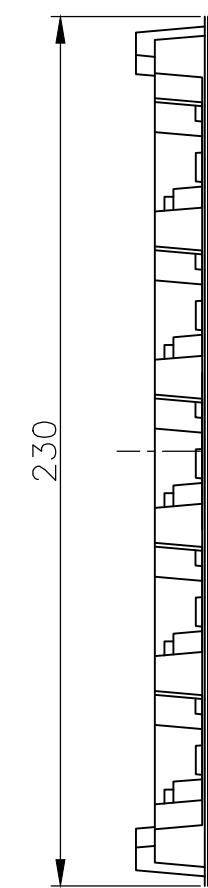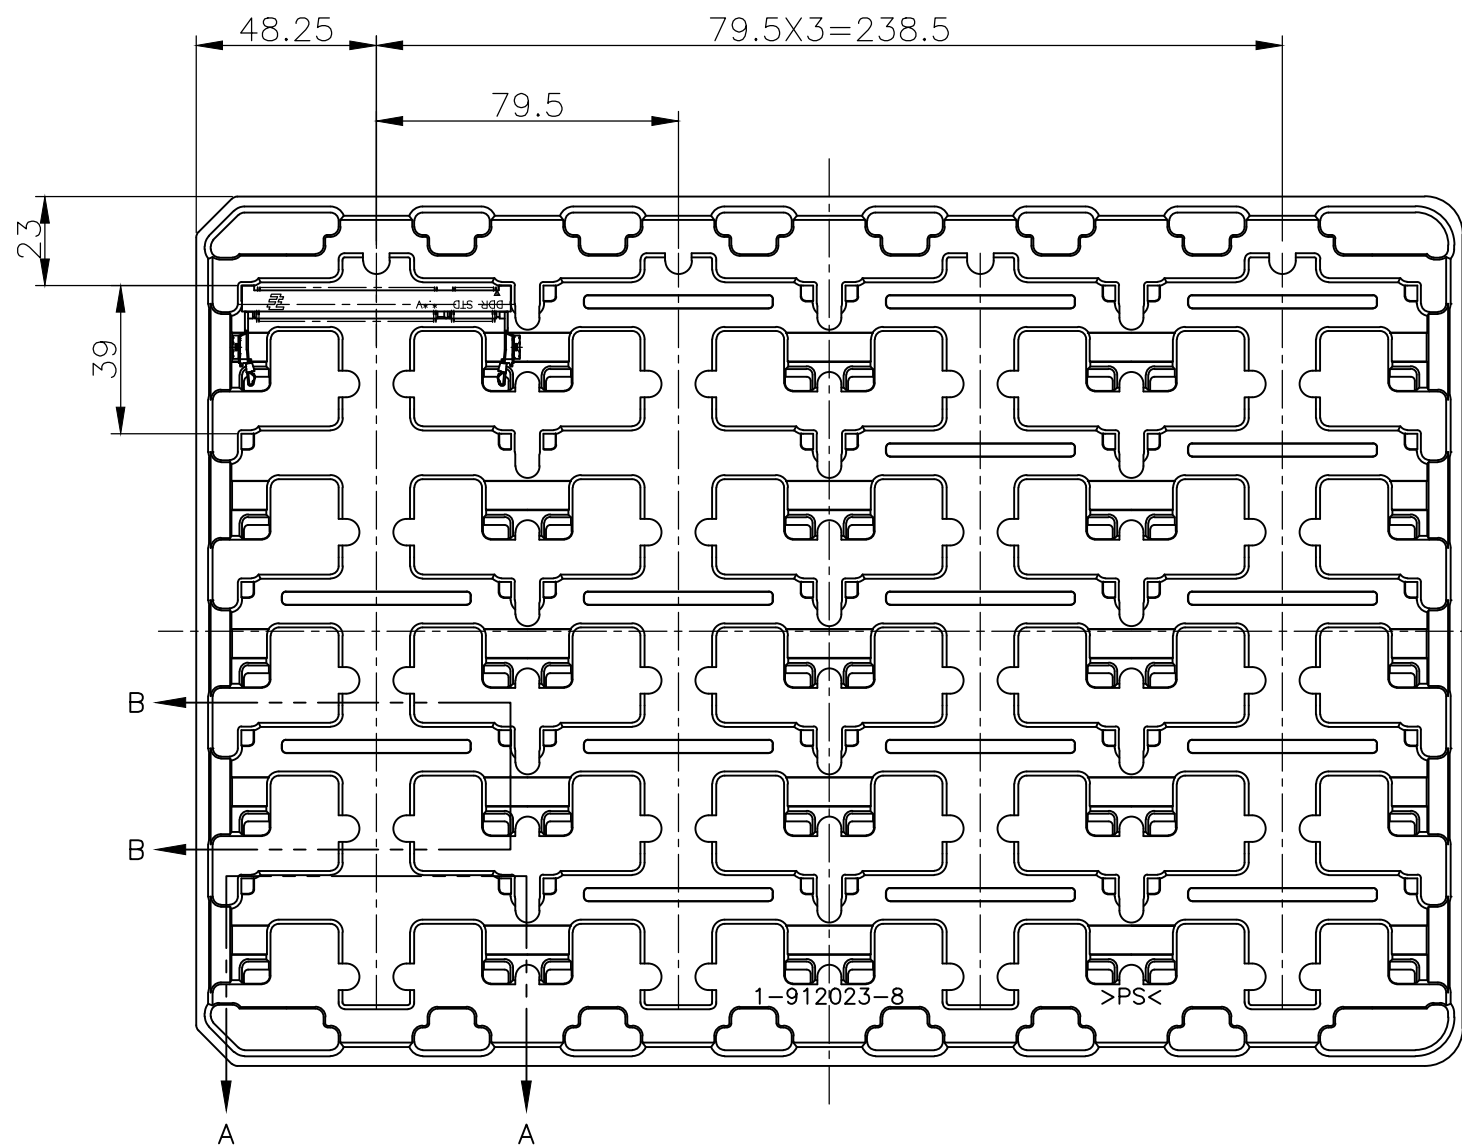


A-A  
 SCALE 1:1  
 (180DEG. ROTATE)



B-B  
 SCALE 1:1

1. THE DIRECTION OF EACH CONNECTOR ON A TRAY IS REFERRED TO THIS DRAWING.
2. GENERAL TOLERANCE: ±0.5



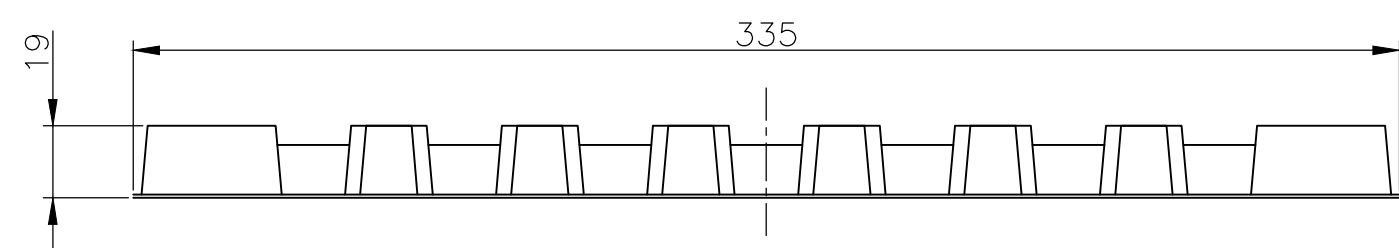


20EA/TRAY	1612618-4
20EA/TRAY	1612618-1
QTY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity NAME DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH 200POS				
DIMENSIONS: MM		CHK					
		APVD					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.5 3 PLC ± 0.5 4 PLC ± - ANGLES ± 3°		PRODUCT SPEC					
MATERIAL		FINISH	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
CUSTOMER DRAWING			WEIGHT	A3	00779	C-1612618	-
			SCALE	1:2	SHEET	4 OF 5	REV E4


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

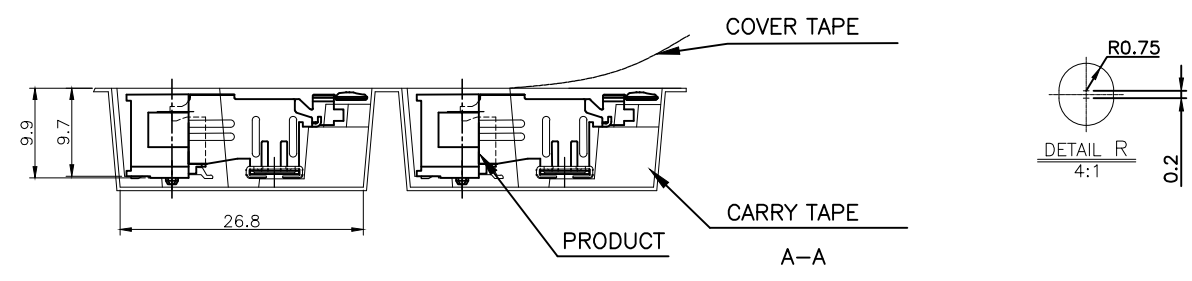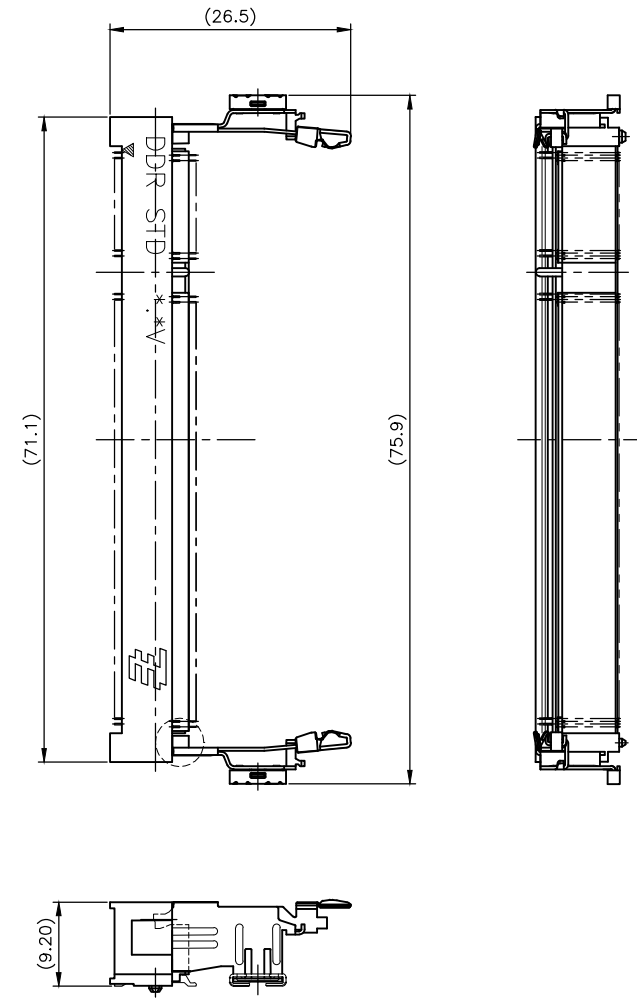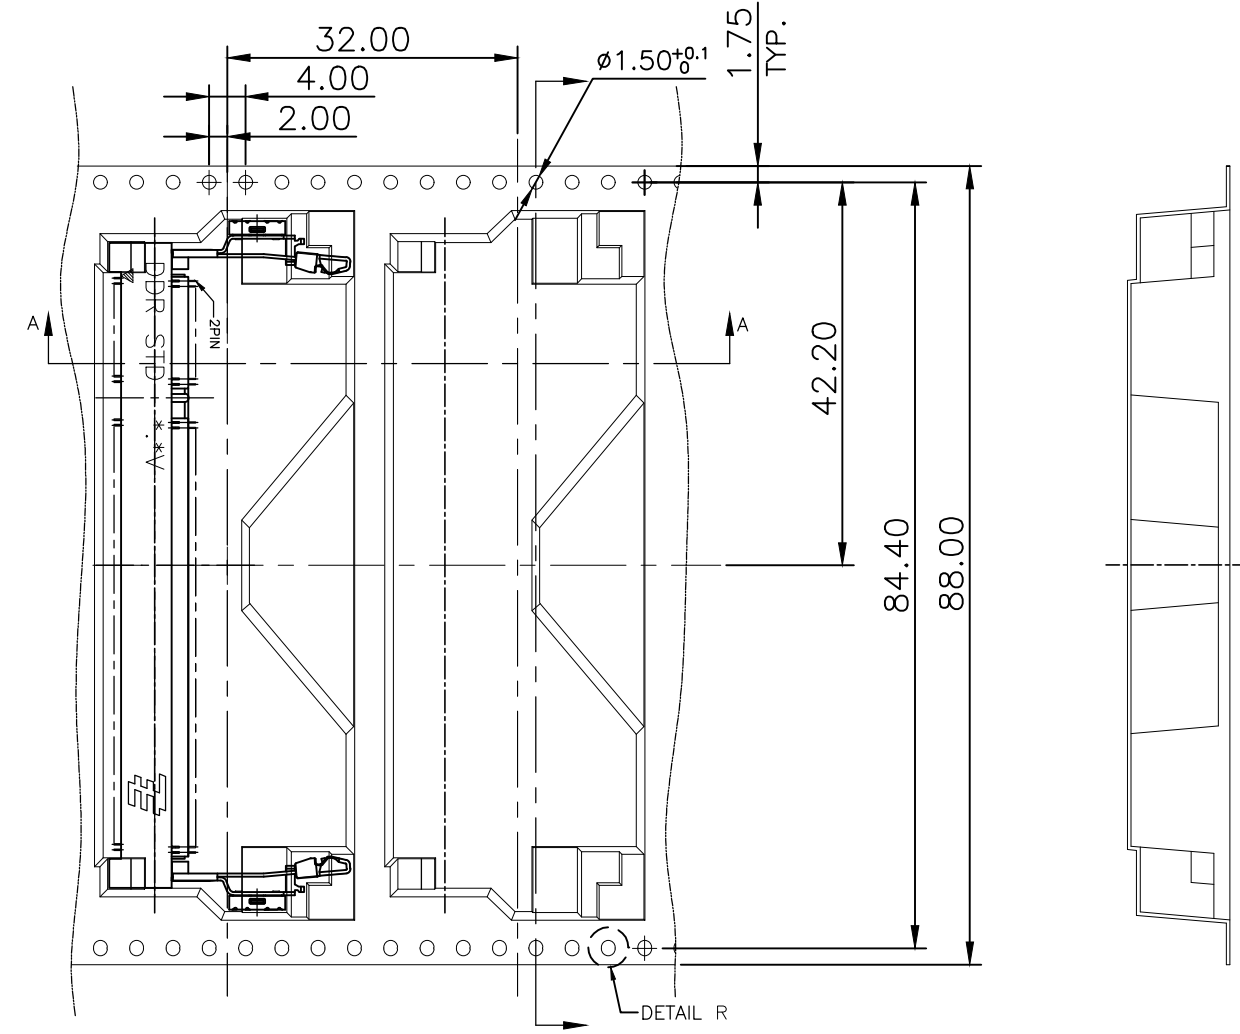

1. THE DIRECTION OF EACH CONNECTOR ON THE EMBOSS IS REFERENCED TO THIS DRAWING.
2. GENERAL TOLERANCE:  $\pm 0.5$ ,  $\pm 3^\circ$ .

PULL OUT DIRECTION

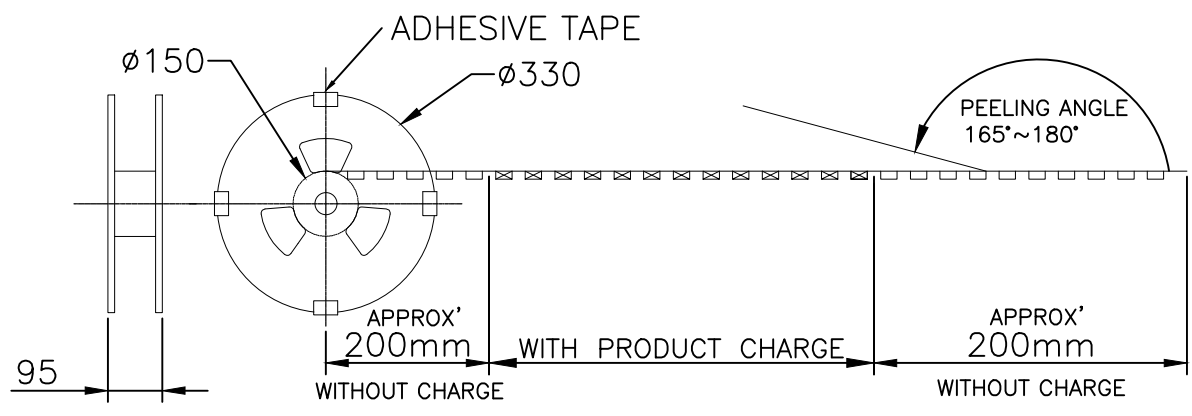

120	2	240	2-1612618-1
PCS/REEL	REEL/CARTON	PCS/CARTON	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
DIMENSIONS: MM		CHK		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME	
0 PLC $\pm -$		PRODUCT SPEC	DDR1 & DDR2 SODIMM SOCKET	
1 PLC $\pm -$		APPLICATION SPEC	0.6mm PITCH 200POS	
2 PLC $\pm 0.5$		WEIGHT	SIZE	CAGE CODE
3 PLC $\pm 0.5$		CUSTOMER DRAWING	A3	00779
4 PLC ANGLES $\pm 3^\circ$			DRAWING NO	C-1612618
FINISH		RESTRICTED TO	-	
MATERIAL		SCALE	1:2	SHEET
		5 OF 5		REV
				E4