


COIL: @ 25°C	
RESISTANCE	600 OHMS ± 10%
NOMINAL VOLTAGE	20.0-33.0 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.5 VDC MAX, 2.7 VDC MIN

CUSTOMER DATA SHEET

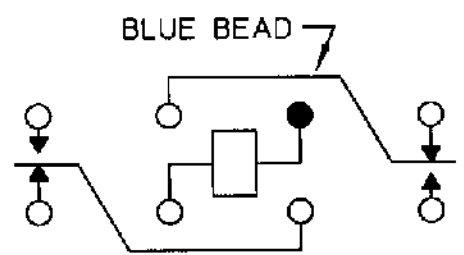

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	30	g's
SHOCK	90	g's	11	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

CONTACT RATING: 5 AMPS 28 VDC
RESISTIVE 2 AMP 28 VDC INDUCTIVE
100,000 OPERATIONS

NOTES:

OPERATE	5 MS MAX
RELEASE	4 MS MAX
CONTACT BOUNCE	2.5 MS MAX
DIELECTRIC	1000 VAC (700 VAC ACROSS CONTACTS)

DR. R.B. 9/7/95 CK. *[Signature]*



CUST. GENICOM
CUST. NO. 3SBK5002H1

TYPE FW5A RELAY

FW5A1101S17