
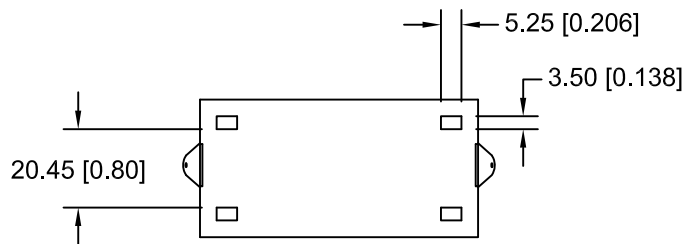





Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/01/14	E	REDRAWN IN AUTOCAD UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
03/31/17	F	DIM. 27.20 WAS 26.50 DIM. 36.00 WAS 35.60 DIM. 69.10 WAS 68.70 ADDED MOUNTING HOLES	T.B.	B.S.	
04/07/17	G	ADDED BOTTOM VIEW	T.B.	B.S.	

NOTES:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE  
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 RIVETS: BRASS, NICKEL PLATED.  
 SPRING: SPRING STEEL, NICKEL PLATED.  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
 EIA-540J000  
 ROHS 2 COMPLIANT.

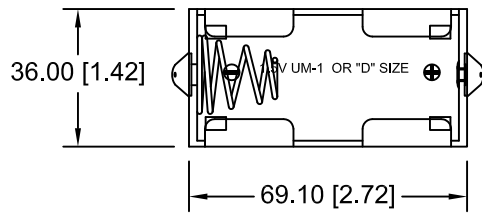

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title ONE "D" CELL HOLDER WITH SOLDER LUGS	Date 04/07/17	Drawing Number BHDL
Fractional ± .8 (.030)			
Angular ± 3°			