
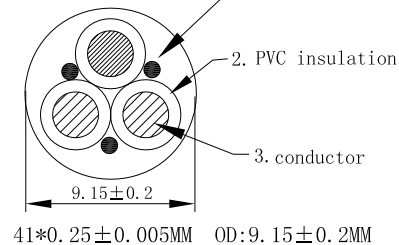
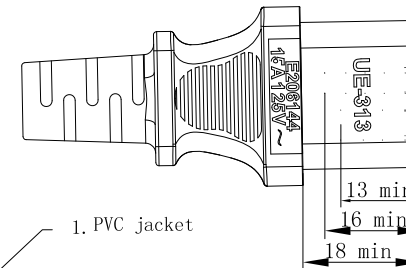
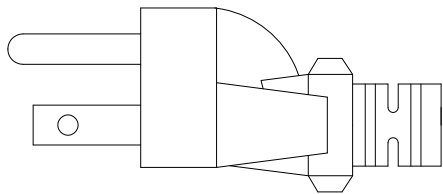


| | | |
|-------|-----------------|------|
| Items | Content Revised | Date |
| 1 | | |

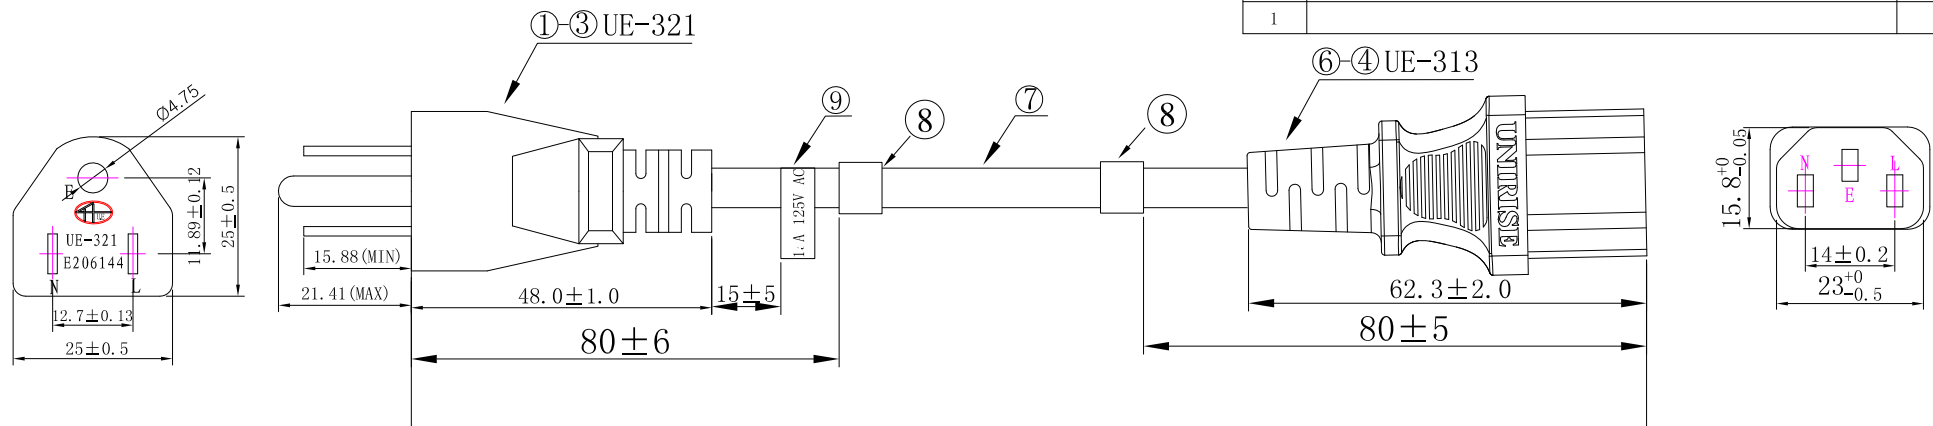




Technical requirements:

1. Plug: a:UE-321, Current (A) :13, Voltage (V) :125
b:UE-313, Current (A) :13, Voltage (V) :125
2. Cord: Soft SJT #16/3C 105°C unirise
3. High Voltage Tested: 1500V/S No Attacked, No Flicker
4. No nick, Spot, Mottle Nn Appearance and Wording is Clearly
5. The All Material Compliance with RoHS and REACH

BOM表

| | | | | |
|-------|--------------|---------------------------------|-------|--------|
| 9 | 39002005 | UL Label 13A 125V AC | 1PCS | ---- |
| 8 | 39005021 | 47x13mm PET Paster Length label | 2PCS | ---- |
| 7 | 205353021043 | SJT 16/3C 105°C Soft | 1PCS | |
| 6 | 306560619 | PVC of plug 77A | / | |
| 5 | 316313900 | Inside Shelf (S8741PL-39) | 1PCS | White |
| 4 | 315313902 | Blade of UE-313 (98740BS-0) | 3PCS | ---- |
| 3 | 306310619 | PVC of plug 77A | / | |
| | 315321900 | Blade of UE-321 | 1PCS | ---- |
| 2 | 315222900 | NO Polarity Blade | 2PCS | ---- |
| 1 | 316321900 | Inner frame | 1PCS | White |
| Items | Part Number | Description | Q' TY | Colour |

CORD MARKING: E176096 (UL) SJT VW-1 105°C 300V 3x2.08mm² (16 AWG)
Or C(UL) SJT FT1 105°C 300V 3x2.08mm² (16 AWG) UNIRISE

| | | |
|-----------------------------------|---|-----------------------------|
| CUSTOMER CONFIRM | PWCD-515PC13-13A-XXF-YYY | XXF = LENGTH YYY = COLOR |
| Drawing No.:PWCD-515PC13-13A-XXF- |  | Page: Version:A |
| Power Supply Cord: UE-321+UE-313 | | Approved by:jason |
| Customer : | | Checked by:king |
| Colour : |  | Drawn by:songyu |
| Sample Part NO.:W009-007-2013 | Unit:mm Sheet:  | DATE:2013-07-09 |