

6

5


4

3

2

1

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1200652174	804000A34M030A	9.84' +3.50" -0 [3.0M +88.9 -0]
1200652175	804000A34M050A	16.40' +6.50" -0 [5.0M +165.1 -0]
1200652176	804000A34M100A	32.81' +12.50" -0 [10.0M +317.5 -0]

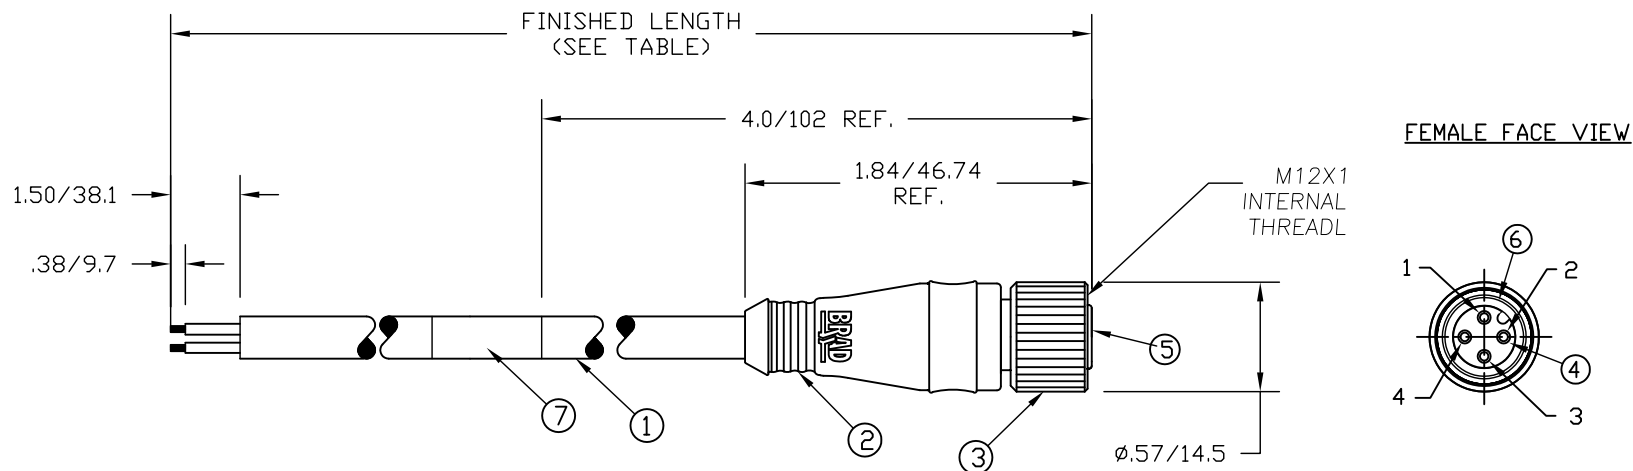

## NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) ELECTRICAL DATA:  
MAX. VOLTAGE: 250V AC/DC  
MAX. CURRENT 4A
- 4) ENVIRONMENTAL:  
PROTECTION IP67  
TEMPERATURE RANGE: -20C TO 105C
- 7) WRAP LABEL IS MARKED WITH P/N, DATE CODE,  
VOLTAGE & AMPERAGE.
- 8) ASSEMBLY IS RoHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
7	1	LABEL	PLASTIC FILM	BLACK/YELLOW
6	1	O-RING	VITON	RED
5	1	INSERT	NYLON	BLACK
4	4	SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
3	1	M12 COUPLING NUT	BRASS	BLACK E-COATED
2	1	OVERMOLD	PVC	GRAY
1	1	18/4C AWG ITC-ER/PLTC-ER	PVC JACKET	GRAY

RELEASE EC NO: WNA2010-0575 DRWN: TWOLDEGE 2010/03/17 CHKD: BRUPERT APPR: JFMURPHY 2010/05/21	QUALITY SYMBOLS														
	$\nabla=0$ $\sphericalangle=0$														
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
	<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>2 PLACES</td> <td>±0.05</td> <td>±---</td> </tr> <tr> <td>1 PLACE</td> <td>±0.1</td> <td>±---</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±0.05	±---	1 PLACE	±0.1
	mm	INCH													
4 PLACES	±---	±---													
3 PLACES	±---	±---													
2 PLACES	±0.05	±---													
1 PLACE	±0.1	±---													

DIMENSION STYLE MM ONLY	SCALE	2:1
	DESIGN UNITS	METRIC
	THIRD ANGLE PROJECTION	
	TITLE	MICRO CHANGE ASSEMBLY 4POLE FEMALE ST 18/4CAWG ITC-ER/PLTC-ER GRAY PVC
DRAWN BY	DATE	TITLE
TWOLDEGE	2010/03/17	MICRO CHANGE ASSEMBLY 4POLE FEMALE ST 18/4CAWG ITC-ER/PLTC-ER GRAY PVC
CHECKED BY	DATE	MOLEX INCORPORATED
BRUPERT	---	SD-120065-046
APPROVED BY	DATE	SHEET NO.
JFMURPHY	2010/05/20	1 OF 1
MATERIAL NO.	SEE CHART	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
SIZE	A	

GENERAL TOLERANCES (UNLESS SPECIFIED)															
<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>2 PLACES</td> <td>±0.05</td> <td>±---</td> </tr> <tr> <td>1 PLACE</td> <td>±0.1</td> <td>±---</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±0.05	±---	1 PLACE	±0.1	±---
	mm	INCH													
4 PLACES	±---	±---													
3 PLACES	±---	±---													
2 PLACES	±0.05	±---													
1 PLACE	±0.1	±---													
ANGULAR ±---°															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS															

SCALE	2:1
DESIGN UNITS	METRIC
THIRD ANGLE PROJECTION	
TITLE	MICRO CHANGE ASSEMBLY 4POLE FEMALE ST 18/4CAWG ITC-ER/PLTC-ER GRAY PVC
MOLEX INCORPORATED	
SD-120065-046	
SHEET NO.	1 OF 1

6

5

4

3

2

1