
Ξ	۵	П	m		0	σ		
4	Z A Thread	ØS						4
↔ CHARACTERISTICS		Keying Shown as	Connector dimension		LAYOUT SHOW	WN AS EXAMPLE		3
-Standard : Based on -Shell Material -Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability	 MIL-DTL-38999 Series III Aluminium Black Zinc Nickel Thermoplastic Copper Alloy Silicon Elastomer Gold over copper Alloy 0.8µm minimun 500 Mating cycles 	n	DimNominalØS25 MaxZ31 MaxVV THREADM15x1-6g		due to a use of the Proc the Specifications issued by (professional recom	FR Not	with ird party	2
-Delivered with Sour -Temperature Range -Salt Spray — -Mass	iau contacts and Accessories : -65°C to +175°C : 500 hours : 14.98 g ± 10%			A 18-10-2016 ISS DATE Designed By:	1	0511Z01PC	MOD N STOMER DRAWING	
BASIC SERIES: SHELL TYPE : Plug w CONTACT TYPE : S SHELL SIZE : 11		Z 01 P C	CONTACT TYPE : PIN(TITLE SCALE NA SOURIAU	General Tolera ±- WWW.SOURI	AU.COM	IPRDS / PROJECT 859 This document is the property of SOURIAU it must not be reproduced or communicated without permission	1
PLATING : Z =	Black Zinc Nickel	F	CONTACT LAY	FORMAT A3 D		RIAU DRG N° 511Z01PC-C B	SHEET 1/2 A	

		т		G		Π		т		D	0	
			Contact Layout	:								
4			01)								
			1#12	/	1							
ω		Ctc A	11-01 X 0	Y 0								
	-										due to a use the Specification	not be liable for any of the Products wh s issued by either of ional recommendat
N												Countr FR
										A 18-10-20 ISS DATE	016 First Release	PN: 8D5112
										Designed By:	Date:	
_										SCALE NA		General linear Tolerances: ±
										FORMAT	U WWW	SOURIAU.C
					I		I		7	A3	1	8D511Z
		Н		G		F		E	\mathbf{V}	D	C	

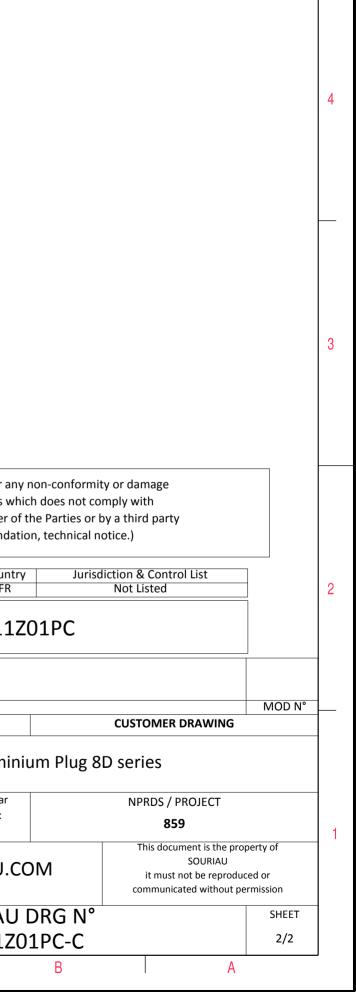

 \triangleright

σ