

**NOTES:**


- ① MAT'L: COPPER
- PLATING: ELECTRO TIN (.0003 MIN)
- ② TIN-PLATED BRASS FERRULE

STUD SIZES: (.005)

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

"UL" LISTING #E32244  
 "CSA" LISTING #18689

WIRE SIZE: 22-18 AWG  
 :25-15 MM<sup>2</sup>

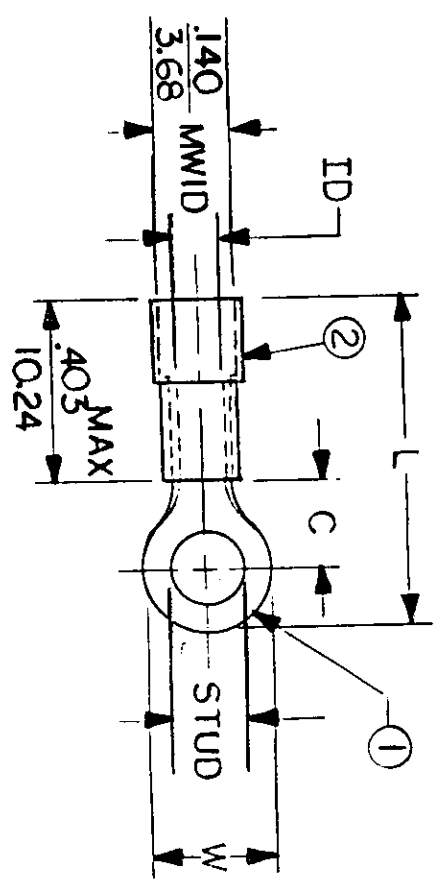

ALL DIMENSIONS =  $\frac{\text{INCHES}}{\text{MM}}$  (MWID) DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"ID" MIN.	AVAILABLE STUD SIZES	STOCK THICKNESS
A-420-	$\frac{.225}{5.72}$	$\frac{.157}{3.99}$	$\frac{.707}{17.96}$	$\frac{.062}{1.57}$	02, 04, 06	$\frac{.028^{+.001}}{.71}$
A-421-	$\frac{.312}{7.92}$	$\frac{.270}{6.86}$	$\frac{.864}{21.95}$	$\frac{.062}{1.57}$	06, 08, 10	$\frac{.028^{+.001}}{.71}$
A-422-	$\frac{.467}{11.86}$	$\frac{.386}{9.80}$	$\frac{1.058}{26.87}$	$\frac{.062}{1.57}$	10, 14, 56	$\frac{.031^{+.001}}{.79}$
A-426-	$\frac{.534}{13.56}$	$\frac{.552}{14.02}$	$\frac{1.257}{31.93}$	$\frac{.054}{1.37}$	10, 14, 56, 38	$\frac{.028^{+.001}}{.71}$
A-432-	$\frac{.254}{6.45}$	$\frac{.240}{6.10}$	$\frac{.805}{20.45}$	$\frac{.062}{1.57}$	04, 06, 08	$\frac{.028^{+.001}}{.71}$

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED

REFERENCE

SCALE: NTS

DATE

TITLE:

RING TONGUE TERMINAL VIBRAKRIMP 400 SERIES



DWG. NO. A CUSTOMER DWG

FILE NO. A-CD-401-01

SCALE: NTS  
 DRAWN. BY: JJ  
 CHKD. BY: GZ  
 APPRD. BY:

DATE  
 11-15-84  
 12-5-84

TITLE:  
 RING TONGUE TERMINAL VIBRAKRIMP 400 SERIES

DWG. NO. A CUSTOMER DWG