

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

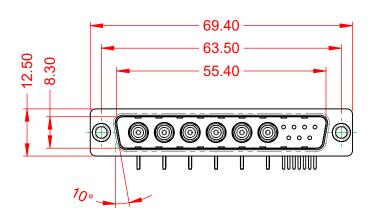



NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, 30µ" GOLD PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C



(IF PRESENT)


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

SIGNAL CONTACT RESISTANCE: 10mΩ MAX.

INSULATOR RESISTANCE: 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms



4							15-0-16	A-A-A-A	
	<u></u>		216	ا ا	<u>.</u>	0			

COMBINATION D-SUB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 629 COMBO ASSEMBLY						
DRAWN: C.B	DATE: JAN. 01/2019					
CHECKED:	DATE:					
SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2					
DRAWING NUMBER: 629-13\W/	3640-7T1 ISSUE					

629-13006640-711 DRAWING NUMBER: PART NUMBER: 629-13W6640-7T1 TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ORIGINAL (1)

0000

0 000 o

 \circ

5W1

0000 3W3









11771

○ ○ ○ ○ ○ ○ ○ ○ ○





13W3






000000....)0



17W5





13W6






21W4









COMBINATION D-SUB



	DRAWN: C.B	DATE: JAN. 01/2019							
	CHECKED:		DATE:						
	SCALE: N.T.S		SHEET	2	OF	2			
)	DRAWING NUMBER:	629-13W6	640-7T	ISSUE					
5	PART NUMBER:	629-13W6	1						

629 COMBO ASSEMBLY

SW REFERENCE NO.: