


| σ | | | | | | |
|---|----------------------------------|--------|---|--|--|--|
| | | | 4 | | | |
| AS EXAMPLE | | | 3 | | | |
| any non-conformit s which does not co er of the Parties or I ndation, technical n untry Jurisc FR 21S11SC | mply with by a third party | | 2 | | | |
| .131130 | | | | | | |
| | CUSTOMER DRAWING | MOD N° | | | | |
| ess Steel Plug 8D series | | | | | | |
| ar : | NPRDS / PROJECT 859 | | | | | |
| I.COM | This document is the property of | | | | | |
| U DRG N° | 1 | SHEET | | | | |
| LS11SC-C | Α | 1/2 | | | | |
| 5 | | | | | | |

| r | Ŧ | ۵ | н г | m | | 0 | |
|----------|---|--|------------|---|--------------------------|---|--|
| | | Contact Layout | | | | | |
| 4 | -x - | $ \begin{array}{c} \varepsilon & + Y \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & $ | | | | | |
| | B + 306 (7.77) C + 348 (8.84) D + 227 (5.77) E + 000 (0.00) F - 227 (5.77) Shell Arrangement no. Nu< | Y-axis (mm) position ID X-axis (mm) Y-axis (mm) +.332 (8.43) G 348 (8.84) 061 (1.55) +.177 (4.50) H 306 (7.77) +.177 (4.50) 061 (1.55) J 121 (3.07) +.322 (8.43) 270 (6.86) K +.000 (0.00) +.123 (3.12) 353 (8.97) L +.000 (0.00) 115 (2.92) 270 (6.86) | s | | | | |
| ى | | | _ | | | | |
| | | | | | | | |
| | 1 | | | | | | |
| | F | | | | | SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda | |
| N | | | | | | Count FR | |
| | | | | | | PN: 8D521 | |
| | | | | | A 08-10-20 | 116 First Release | |
| | | | | | ISS DATE Designed By: | Latest modification - by Date: | |
| | | | | | TITLE | Stainles | |
| <u> </u> | | | | | SCALE NA | General linear Tolerances: | |
| | | | | | SOURIA | OURIAU WWW.SOURIAU. | |
| | | | | | FORMAT A3 | SOURIAL 8D521S | |
| L | Н | G | F | E | D | C | |

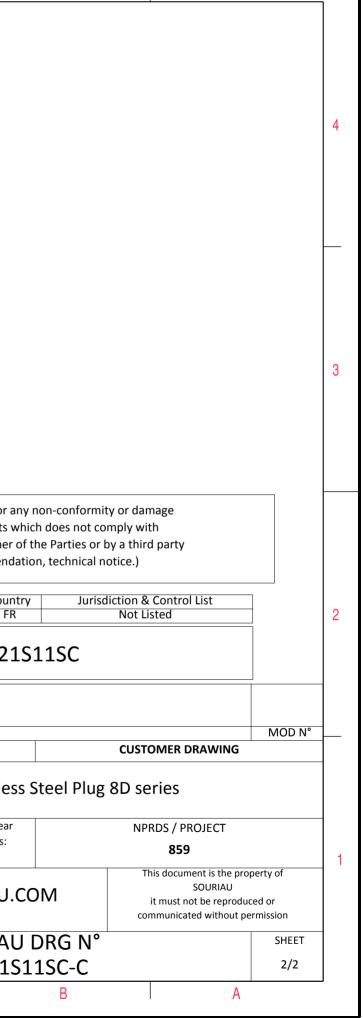

 \triangleright

σ