

## SUMMARY

### # Wires

Low voltage 16



Image is for illustrative purpose only

Series SP  
Termination type Male solder  
IP rating 50  
AWG wire size 36.00 - 28.00  
Cable Ø 4.00 - 5.20 mm  
Status active  
Matching parts [SKN.M16.NLLN](#)

### Download

[Request a quote](#)  
[Eplan](#)  
[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model SA\*: Straight plug, key (N) or keys (P, S and T), with black cable collet  
Keying 3 keys (alpha=0, gamma=30, plug: male contacts, receptacle: female contacts)  
Housing Material Proprietary sulfone, black  
Variant N : Black collet nut  
Weight 7.76 g

### Performance

Configuration SP.M16 : 16 Low V.  
Insulator L: PEEK (UL 94 / V-0/1.5)  
Rated Current 3.0 Amps

### Specifications

Contact Type: Solder  
Contact Dia.: 0.5 mm (0.0196in)  
Bucket Dia.: 0.45 mm (0.0177in)  
Max. Solid Conductor: 0.12 mm<sup>2</sup> (AWG 28)  
Max. Stranded Conductor: 0.12 mm<sup>2</sup> (AWG 28)  
R (max): 8.5 mOhm  
Test voltage (kV rms) Contact-contact: 0.75

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


Air clearance min.: 0.47 mm  
Creepage distance min.: 0.47 mm

## Others

Endurance (Shell): >2000 mating cycles  
Temp (min / max): -50°C / +170°C

---

## DRAWINGS

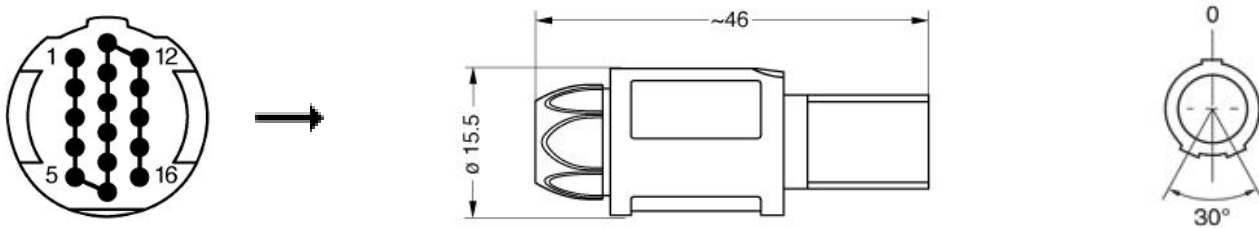

## Dimensions

	A	L
mm.	15.5	46
in.	0,61	1,81

---

## RECOMMENDED BY LEMO

### Tools

### Cables

CMN.16.T30.047QGZE	TPR (medical)	Grey	
16050	PVC	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.