

### Completely pre-assembled Signal Towers / KOMPAKT 37

# K37cl sr cable EM Pulse tone 24VAC/DC GN



Part No.:	699.310.75	-	₩oHS2		UK
Series:	Kompakt 37	 <u>, C</u>	ROHS2	c <b>QL</b> ) us	CA

MECHANICAL DATA			
Height	175 mm		
Diameter	38 mm		
Materials	PC		
Dome colour	Clear		
Housing colour	Silver		
Protection category	IP65		
Connection	Cable		
cross-sectional area maximum	0,34mm² / 22AWG		
Cable entry	Membrane grommet		
Cable entry minimum	d = 1  mm		
Cable entry maximum	d = 9  mm		
Cable length	2000 mm		
Tension relief	Pull-out protection		
Type of fixing	Built-in mounting		
Working temperature minimum	-20°C		
Working temperature maximum	+50°C		
Weight with packaging	202 g		
Product weight	167 g		

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	125 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3 In the connection area: 2

OPTICAL DATA		
Light source	LED	
Light colour	Green Red Yellow	
Optical signal image	Permanent	
Service life optical	50,000 h maximum	

#### **ACOUSTIC DATA**

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



### Completely pre-assembled Signal Towers / KOMPAKT 37

# K37cl sr cable EM Pulse tone 24VAC/DC GN

Volume (max) at 1m distance	85,0 dB (A)
Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum


APPROVAL DATA		
Conforms with CE	Yes	
WEEE	Yes	
Conforms with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12 Type 4X	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

# K37cl sr cable EM Pulse tone 24VAC/DC GN

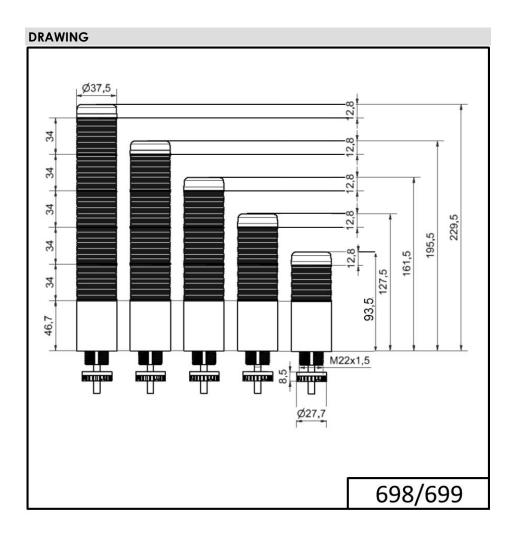

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.