

ITEM	MPN	DESCRIPTION	QTY	UOM
A,B	2008900106	Edgelock 6-ckt Hsg for 1.6mm PCB Thick	2	PC
C	2004490001	EDGELOCK CRIMP TERMINAL - TIN PLATED	12	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B6	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002	BLACK
A2	B5	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002	
A3	B4	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002	
A4	B3	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002	
A5	B2	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002	
A6	B1	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002	

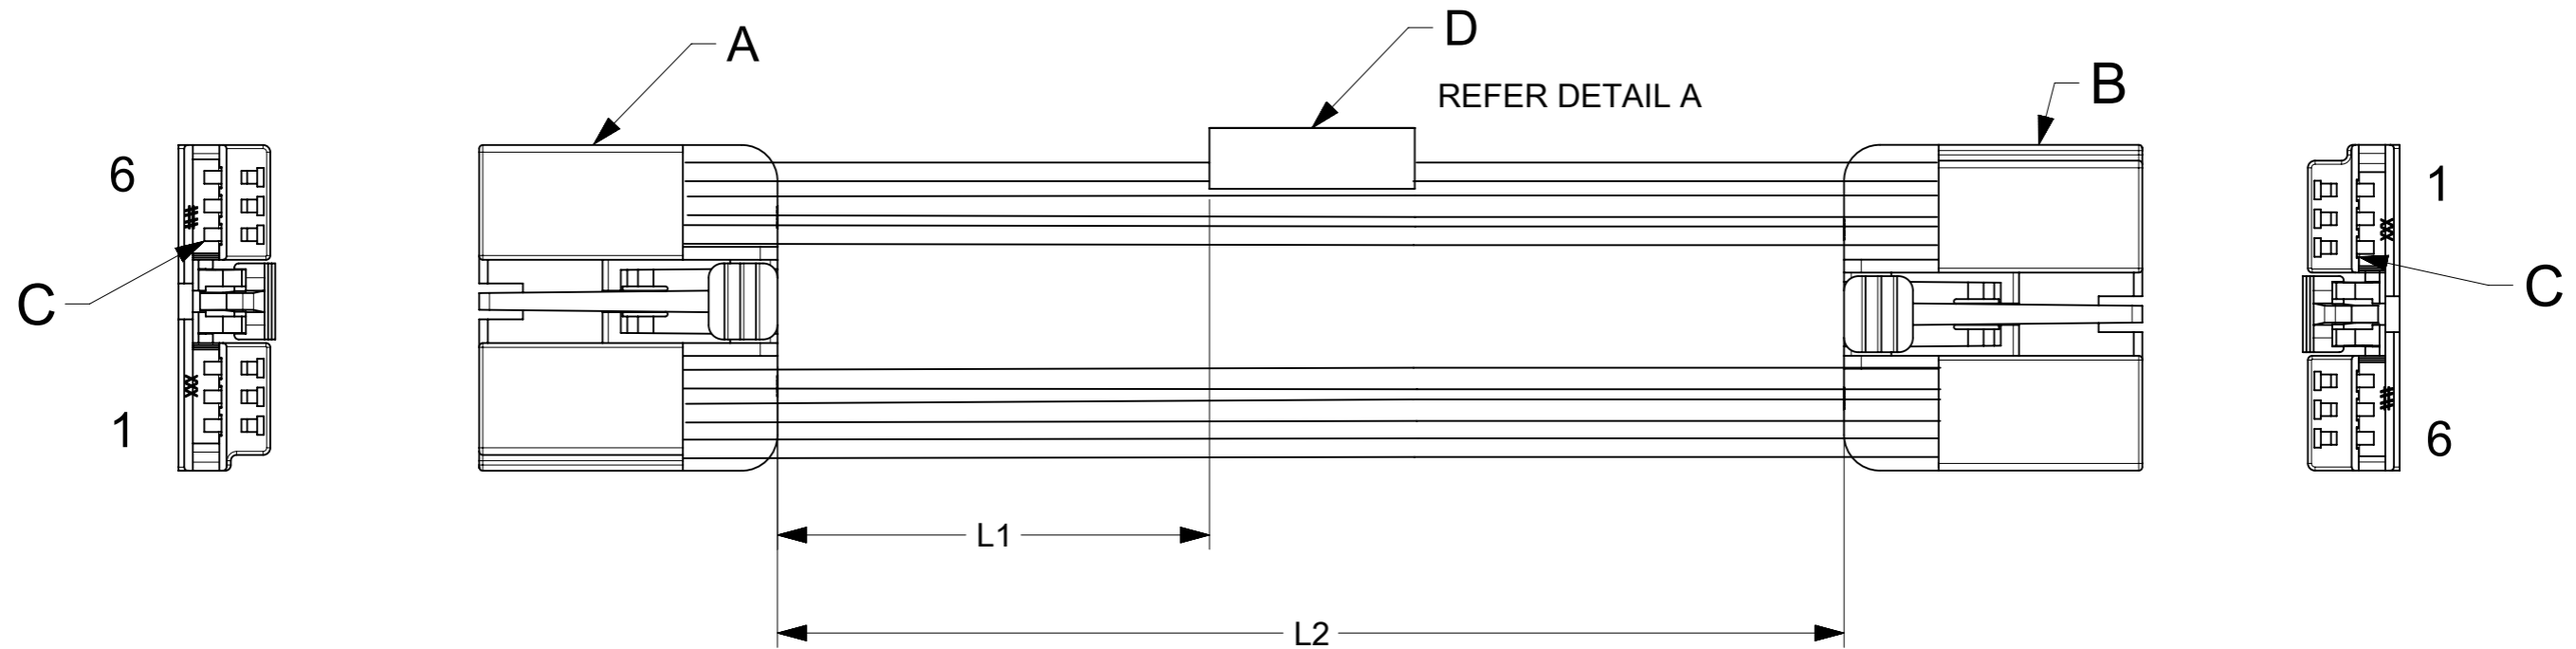


TABLE			
PART NUMBER	L1	L2	TITLE
2163301061	38 REF	100±5	EDGE LOCK R-R 6CKT 100MM Sn
2163301062	63 REF	150±8	EDGE LOCK R-R 6CKT 150MM Sn
2163301063	138 REF	300±10	EDGE LOCK R-R 6CKT 300MM Sn
2163301064	288 REF	600±15	EDGE LOCK R-R 6CKT 600MM Sn

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

NOTES

1. Cable assembly must pass 100% continuity and polarity test.
2. Label text must be 2mm max. in height with Arial font.
3. Connector view shown is from mating side.
4. Label must be wrapped in flag type on a single cable.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:					
	$\nabla_A = 0$ $\nabla_F = 0$ $\nabla_V = 0$	DIMENSION UNITS: mm SCALE: NTS						GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± °
DIVISIONAL SYMBOLS	4 PLACES ±	EC NO: 643086	2020/08/10	PRODUCT CUSTOMER DRAWING				
	3 PLACES ±	DRWN: NNANKOLA	2020/08/13					
	2 PLACES ±	CHK'D: SD	2020/08/13	DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
	1 PLACE ±	APPR: SD	2020/08/13	2163301061		PSD	000	A1
0 PLACES ±	INITIAL REVISION:	2020/07/09	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	REFER THE TABLE	GENERAL MARKET	1 OF 1	