

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes




ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	1.50 ohms max.
D.C. RESISTANCE	8-5 tie(7+6), @20°C	1.80 ohms max.
INDUCTANCE	2-4 10kHz, 100mVAC, $I_s$	2.5mH $\pm$ 30%
DIELECTRIC	2-8 tie(7+6), 2500VAC, 1 second	2000VAC, 1 minute
TURNS RATIO	(8-5):(2-4), tie(7+6)	1.25:1, $\pm$ 2%

GENERAL SPECIFICATIONS:  
 OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.  
 CURRENT RATING: 150mA Arms

\* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

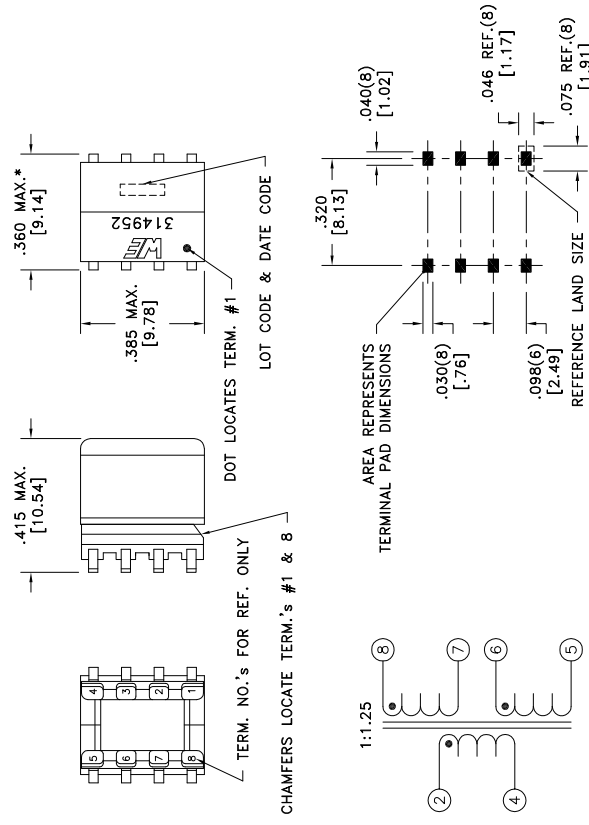

Wire insulation & RoHS status not affected by wire color.  
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0410 www.we-online.com/midcom	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: $\pm$ 1° Fractions: $\pm$ 1/64 Decimals: $\pm$ .005 Footprint: $\pm$ .005	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>750314952</b>
6A	5/15	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eSos p/n: 750314952	SPECIFICATION SHEET 1 OF 1

