

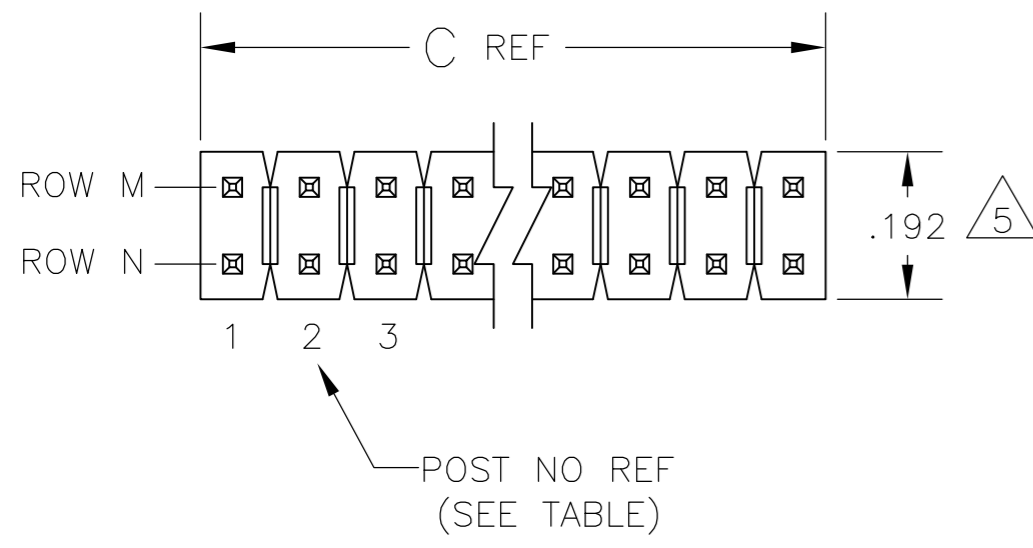


LOC		DIST		REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		L		REVISED PER ECO-14-000066	27JUN2014	NK	MM

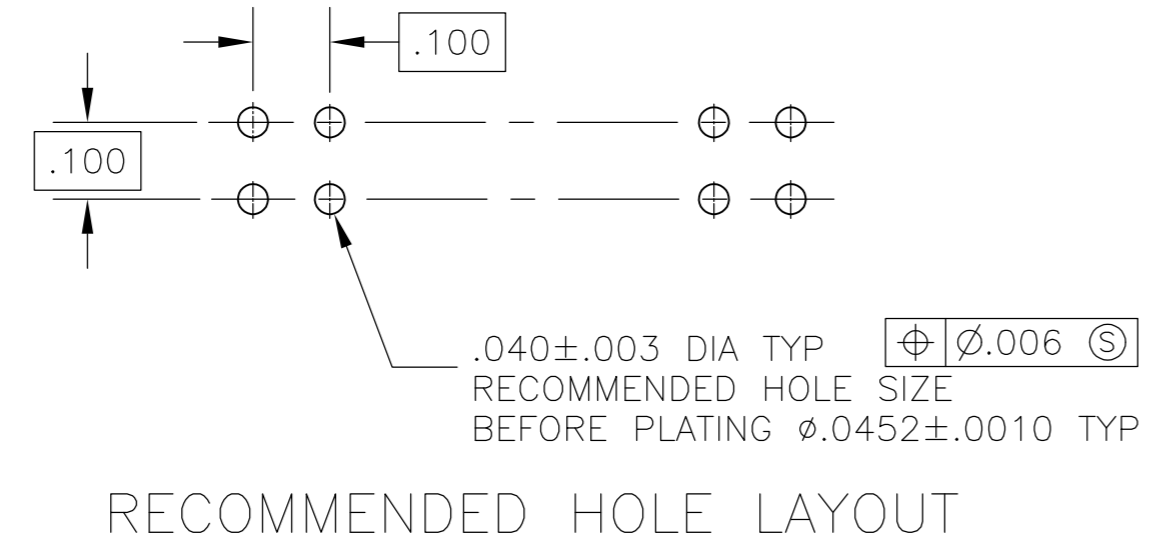

- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- $\triangle 2$  THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- $\triangle 3$  POINT OF MEASUREMENT FOR PLATING THICKNESS.
- $\triangle 4$  RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- $\triangle 5$  FOR 2 POSITION PART ONLY, THE NOTED DIMENSION IS  $.184 \pm 0.16$
- $\triangle 6$   $\oplus .020 \text{ (M)}$  FOR KINKED TAILS.
- $\triangle 7$  OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

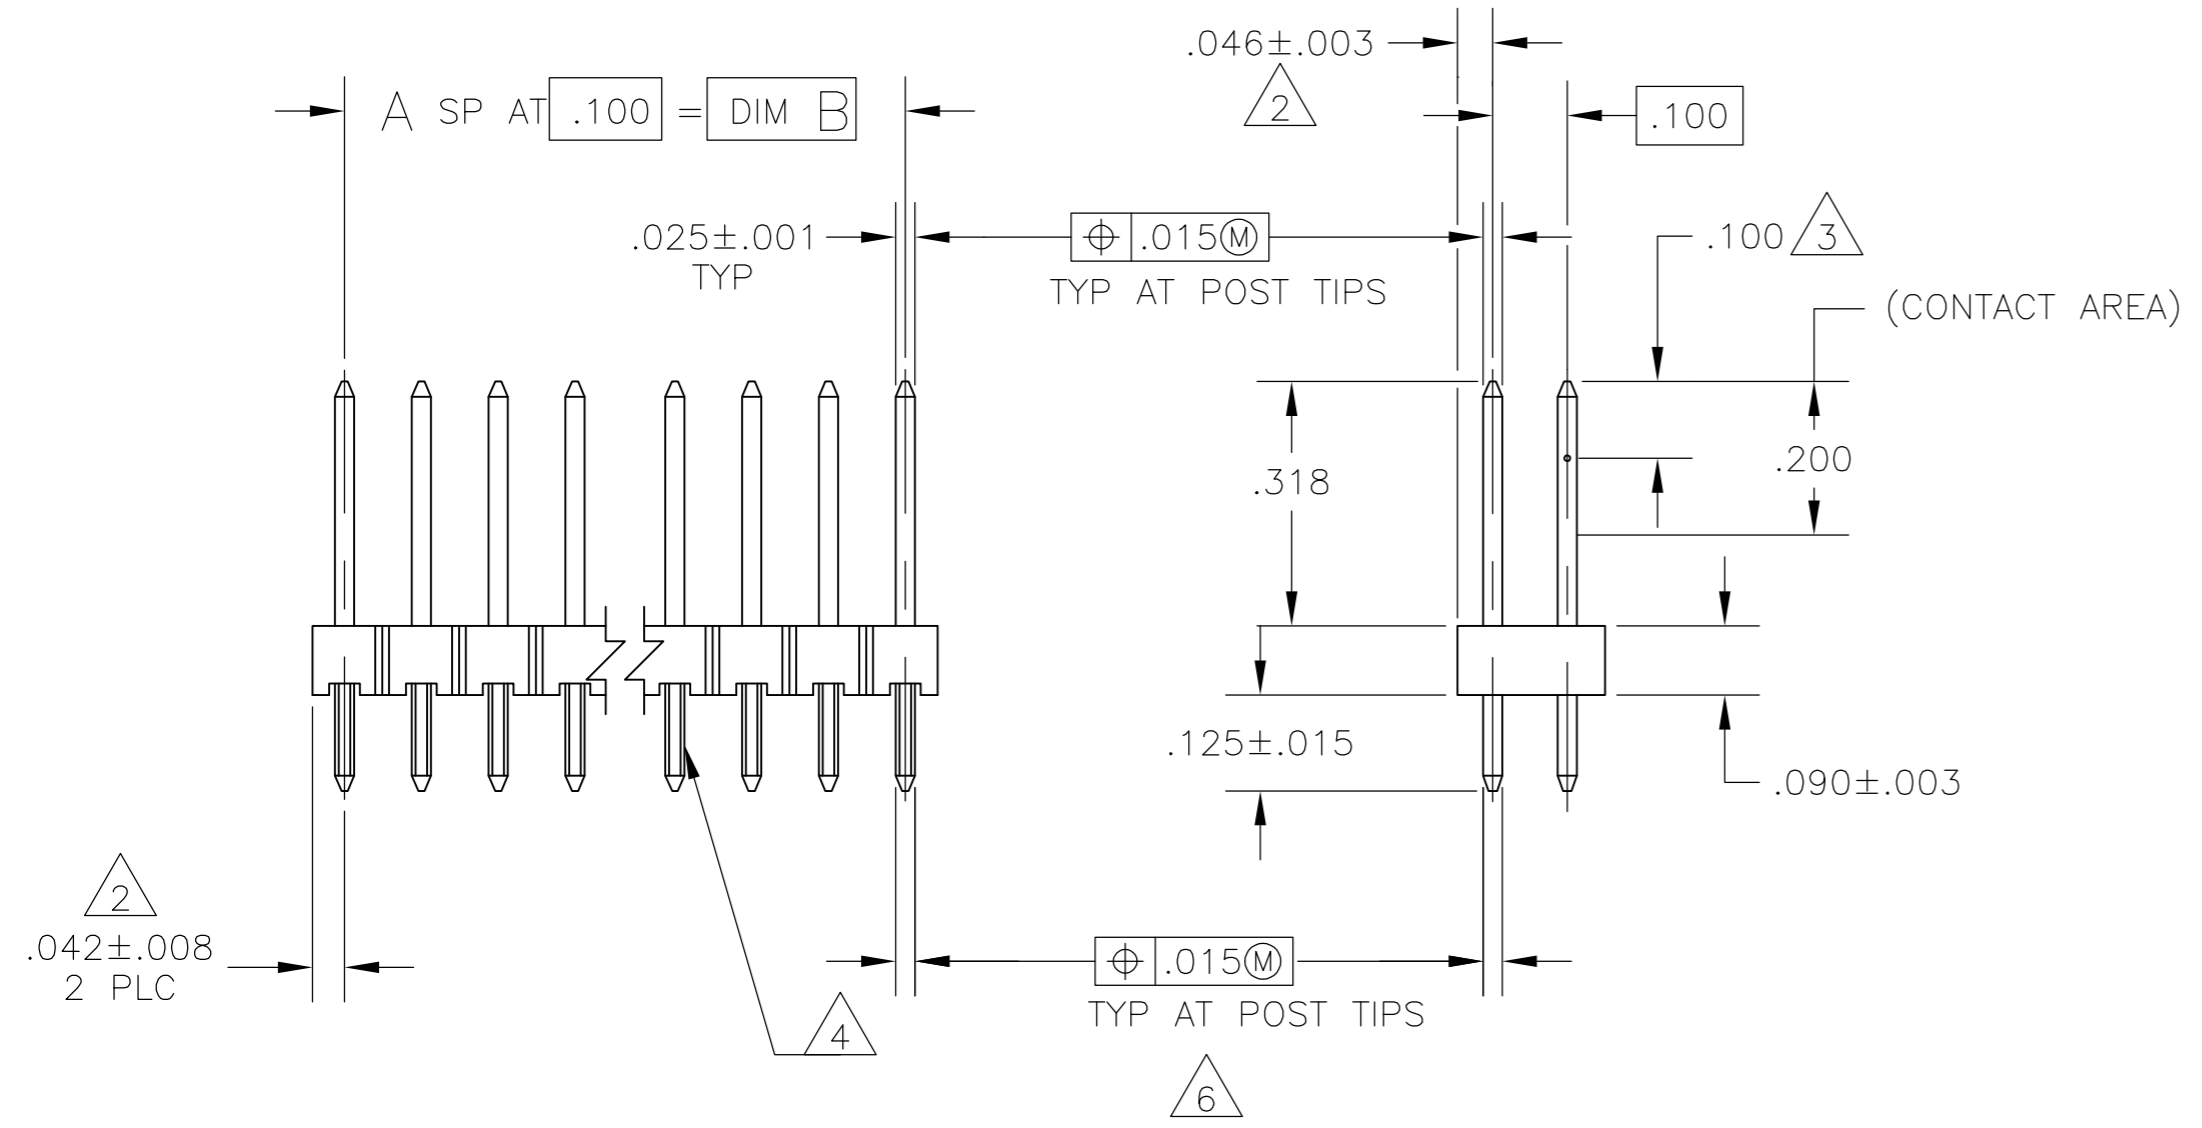

$\triangle 7$ OBSOLETE	3.984	3.900	39	80	2-104432-0
	2.984	2.900	29	60	1-104432-9
	2.484	2.400	24	50	1-104432-8
	1.984	1.900	19	40	1-104432-7
$\triangle 7$ OBSOLETE	1.684	1.600	16	34	1-104432-6
	1.484	1.400	14	30	1-104432-5
	1.384	1.300	13	28	1-104432-4
	1.284	1.200	12	26	1-104432-3
$\triangle 7$ OBSOLETE	1.184	1.100	11	24	1-104432-2
	1.084	1.000	10	22	1-104432-1
	.984	.900	9	20	1-104432-0
	.884	.800	8	18	104432-9
	.784	.700	7	16	104432-8
	.684	.600	6	14	104432-7
$\triangle 7$ OBSOLETE	.584	.500	5	12	104432-6
	.484	.400	4	10	104432-5
	.384	.300	3	8	104432-4
	.284	.200	2	6	104432-3
	.184	.100	1	4	104432-2
	.084	-	-	2	104432-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H MOLL 28JUN88	<b>STE</b> TE Connectivity	
DIMENSIONS: INCHES		CHK R FEIDT 28JUN88		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R FEIDT 28JUN88	NAME	
0 PLC ± -		PRODUCT SPEC	HEADER ASSY, MOD II, BREAKAWAY, DBL ROW, .100X.100 CL, VERT, .025 SQ POSTS, WITH RETENTION FEATURE	
1 PLC ± -		APPLICATION SPEC	SIZE A2	CAGE CODE 00779
2 PLC ± -		WEIGHT -	DRAWING NO C=104432	RESTRICTED TO -
3 PLC ± .005		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 1
4 PLC ± -			REV L	
ANGLES ± -				
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR-BLACK POST: COPPER ALLOY		FINISH POST: .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL		