

①


③ ④

②

NOTES:

Electrical test:

1. 100% short, open, miswire test
2. Conduct resistance : 3 Ohm max
3. Insulator resistance : 20 Mohm min
4. Hi-Pot : DC 300V /10ms
5. Current rating:1.5A

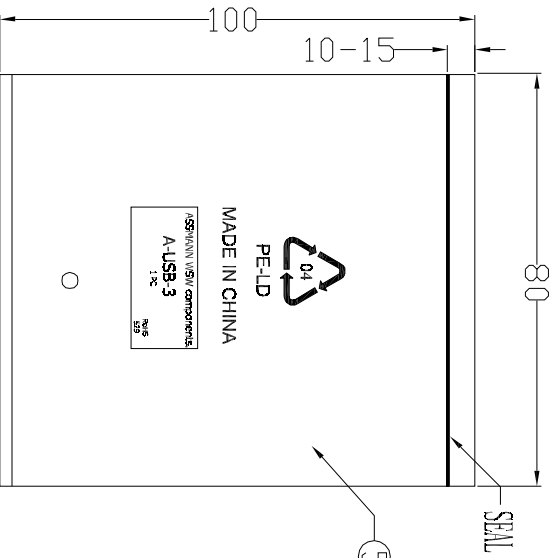

1PC/PE BAG

RoHS compliant

Unit: mm

⑥	PE BAG	1/10	CLEAR SIZE:180*250*0.05mm PRINT BLACK"MADE IN CHINA" + "10PCS"
⑤	PE BAG	1	CLEAR SIZE:80*100*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
④	OUT JACKET	6g	BEIGE(IV-29) 40P PVC
④	IN JACKET	4g	CLEAR LDPE
③	CABLE	3	UL1007 28AWG L=30MM
②	CONN	1	USB A MALE,SHELL NICKEL PIN GOLD FLASH SHORT BODY
①	CONN	1	USB B FEMALE,SHELL NICKEL PIN GOLD FLASH SHORT BODY

SPECIFICATION

Scale	Free								
TOLERANCE									
DIM	TOL								
Angle	TOL								
Id.	①	Drawn	14.12.2017	Winnie					
Modification									



Customer-No.	
ASSMANN WSW-No.	A-USB-3
Drawing-No.	ASS 8156 CA
Replace	rev00

1	2	3	4	5	6	7
H	G	F	E	D	C	B