


**FEEDTHROUGH FOR P.C.B SOLDER TYPE**


**R280.222.000**

**CRIMP TYPE CABLE 2.6/50**



Series : MCX

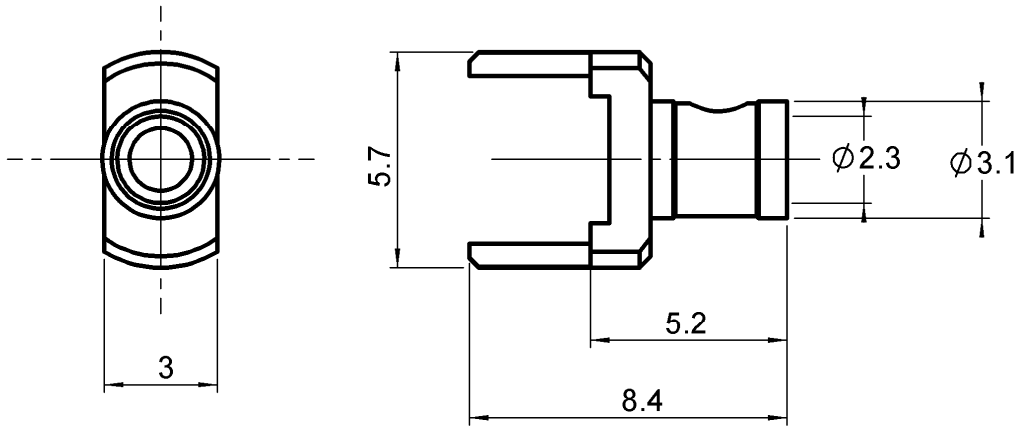


**PANEL CUT OUT**



	mm	
	Maxi	mini
A	1.15	1.05
B	1.15	1.05
C	5.15	5.05



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	GOLD OVER NICKEL
CENTER CONTACT	-	-
OUTER CONTACT	-	-
INSULATOR	-	-
GASKET	-	-
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0902 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary



**FEEDTHROUGH FOR P.C.B SOLDER TYPE**

**R280.222.000**

**CRIMP TYPE CABLE 2.6/50**

Series : **MCX**

**PACKAGING**

Standard	Unit	Other
<b>100</b>	<b>'W' option</b>	<b>Contact us</b>

**SPECIFICATION**

**CABLE ASSEMBLY**

Stripping	a	b	c	d	e	f
mm						

**ELECTRICAL CHARACTERISTICS**

Impedance		<b>50</b> Ω
Frequency		<b>0-3</b> GHz
VSWR	+	<b>NA</b> x F(GHz) Maxi
Insertion loss		<b>NA</b> √F(GHz) dB Maxi
RF leakage	- (	<b>NA</b> -F(GHz)) dB Maxi
Voltage rating		<b>2000</b> Veff Maxi
Dielectric withstanding voltage		<b>900</b> Veff mini
Insulation resistance		<b>NA</b> MΩ mini

Assembly instruction :

Recommended cable(s)

**MECHANICAL CHARACTERISTICS**

Recommended torque		
Panel nut		<b>NA</b> N.cm
Clamp nut		<b>NA</b> N.cm
A/F clamp nut		<b>NA</b> mm
Mating life		<b>NA</b> Cycles mini
Weight		<b>0,2660</b> g

Cable retention

- pull off	<b>53</b> N mini
- torque	<b>NA</b> N.cm

**TOOLING**

Part Number	Description	Hexagon
.	.	.

**OTHER CHARACTERISTICS**

-

**ENVIRONMENTAL**

Operating temperature	<b>-55/+155</b> °C
Panel leakage	

Issue : 0902 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary




**RADIALL**®

**FEEDTHROUGH FOR P.C.B SOLDER TYPE**


**R280.222.000**

**CRIMP TYPE CABLE 2.6/50**


Series : MCX




1-1 Cable stripping

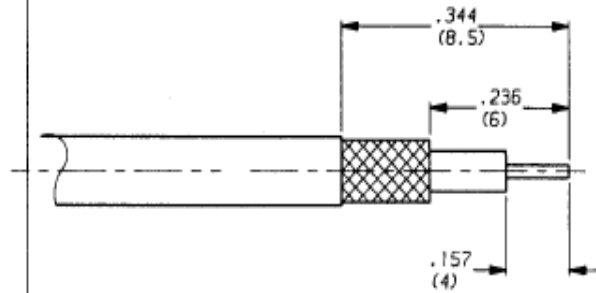

2-1 To introduce cable into the connector body until contact with it according to F direction

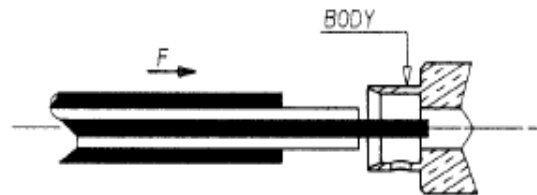

3-1 To solder the braid on the body through F hole

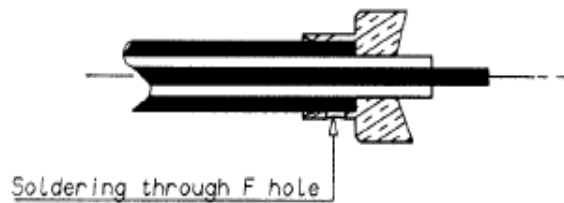

Issue : 0902 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary



**RADIALL**®