
	م ا	ш –	m	τ	-	0		A		٦
		M Thread								_
						LAYOUT S	HOWN AS EXAMPLE			
		Keying	Shown as example							
CHARACTE	RISTICS		Connector dimension							
-Standard :	ased on MIL-DTL-38999 Series III		Dim Nominal ØS 32.5 Max							
-Shell Mate	-		Z' 31.5 Max	-			iable for any non-conformit			
-Shell Platin			VV THREAD M22x1-6g				Products which does not co by either of the Parties or b			
-Insulator	: Thermoplastic						commendation, technical n			
-Contacts	: Copper Alloy						•			
-Seals & Gro								iction & Control List		
		n minimum					FR	Not Listed		
-Durability	: 500 Mating cycles					PN: 8	8D515J35BD			
	ith Souriau contacts and Accessories									
-Temperatu					A 19-10-2016	First Release			_	
-Salt Spray	: 2000 hours			-	ISS DATE	Latest modification - by			MOD N°	,—
-Mass	: 31.3 g ± 10%			-	Designed By:	Date:		CUSTOMER DRAWING		
				-	TITLE		Composite Plug 8	D series		
			- 1	-	SCALE		neral linear			
BASIC SERIE		15 J 35 B	D		-		plerances:	NPRDS / PROJECT 859		
SHELL TYPE	: Plug with RFI Shielding				NA	$\neg \Psi$	±	This document is the prope	erty of	
CONTACT T	PE : Standard Crimp Contact		OR	IENTATION : D	SOURIAU		JRIAU.COM	SOURIAU		
SHELL SIZE	15		CONTACT TYPE : SOCKET	(500 Matings)	JUUNAU			it must not be reproduce communicated without perr		
PLATING	J = Olive drab Cadmium		CONTACT	AYOUT : 15-35	FORMAT	 ∩۲	URIAU DRG N°		SHEET	-
		I			A3		D515J35BD-C		1/2	

r	Ŧ	۵	н г	m		0
4	×	Contact Layout				
	Contact position ID Loca 1 +.045 (1.14) 2 +.123 (3.12) 3 +.214 (5.36) 4 +.254 (6.45) 5 200 (5.08) 6 +.247 (6.27) 7 +.200 (5.08) 8 +.130 (3.30) 9 +.045 (1.14) 10 045 (1.14)	Y-axis (mm) Contact position ID X-axis (mm) Y-axis (mm) + 262 (6.65) 20 +.123 (3.12) +.119 (3.02) + 217 (5.51) 21 +.170 (4.32) +.050 (1.02) + 160 (4.06) 22 +.170 (4.32) 050 (1.27) - 080 (2.03) 23 +.123 (3.12) 127 (3.23) - 010 (.25) 24 045 (1.14) 172 (4.37) - 089 (2.49) 25 045 (1.14) 172 (3.23) - 175 (4.45) 26 123 (3.12) 127 (3.23) - 232 (5.89) 27 170 (4.32) 050 (127) - 266 (6.65) 28 170 (4.32) +.040 (1.02) - 262 (6.65) 29 123 (3.12) +.117 (1.93 (3.12)				
ω	19 +.045 (1.14) (/ Shell Arrangement Ni	-232 (5.89) 30 045 (1.14) +.172 (4.37) 175 (4.45) 31 +.045 (1.14) +.074 (1.88) .098 (2.49) 32 +.090 (2.29) 004 (0.10) .010 (2.5) 33 +.045 (1.14) 082 (2.08) .480 (2.03) 34 045 (1.14) 082 (2.08) .400 (1.25) 33 045 (1.14) 082 (2.08) .400 (1.20) 34 045 (1.14) 082 (2.08) .400 (1.25) 36 045 (1.14) 082 (2.08) .400 (2.03) 34 045 (1.14) 082 (2.08) .4172 (4.37) .36 046 (1.14) +.074 (1.88) .262 (6.65) 37 +.000 (0.00) 004 (0.10) .4172 (4.37) Applicable to MIL-DTL-38999 only) .37 22D M All MS27528-38				
						SOURIAU shall not be liable for due to a use of the Products the Specifications issued by eithe (professional recommen
N						PN: 8D51
					A 19-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_					TITLE SCALE NA	Com General linea Tolerances: ±
					SOURIA	U WWW.SOURIAU
					FORMAT A3	SOURIA 8D515
L	Н	G	F	E	D	C

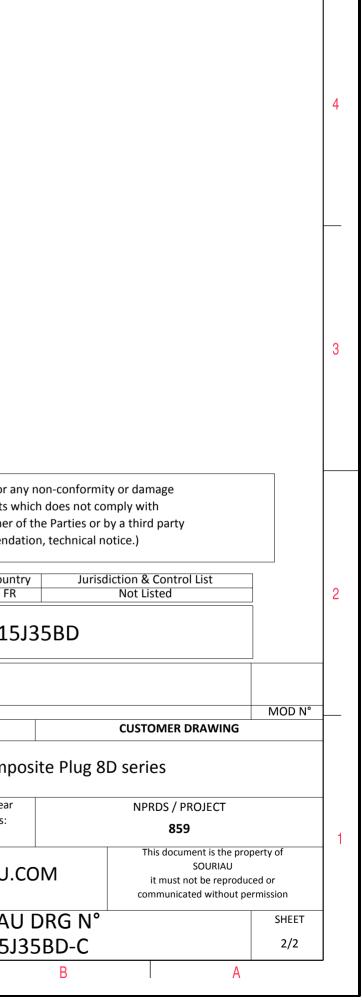

 \triangleright

σ