
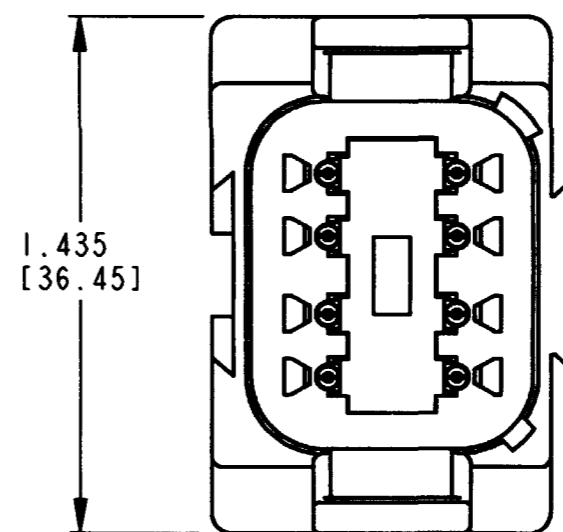
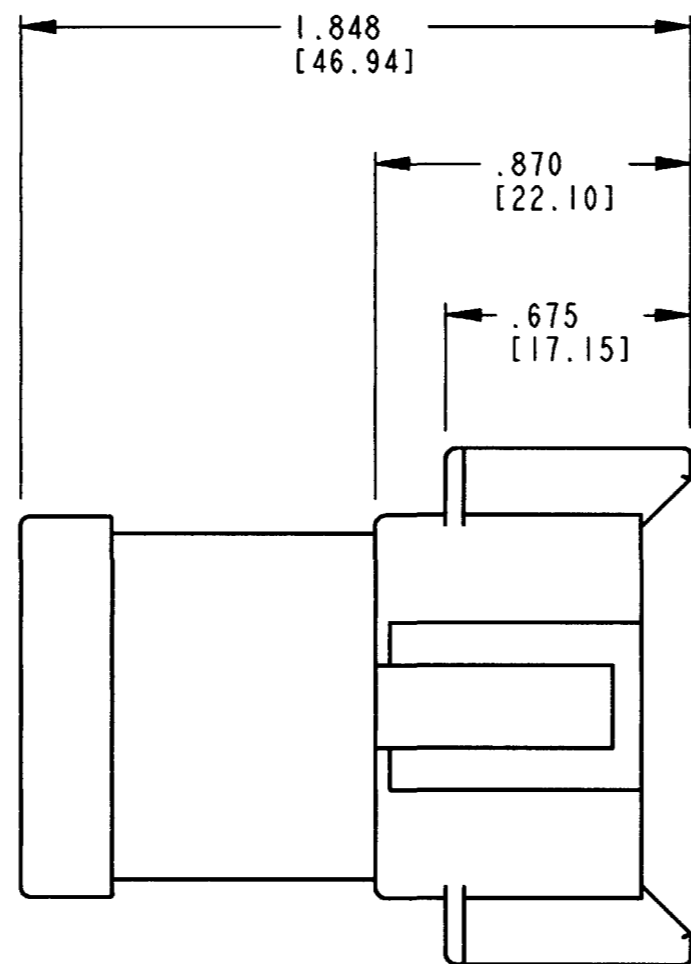


3D VIEW

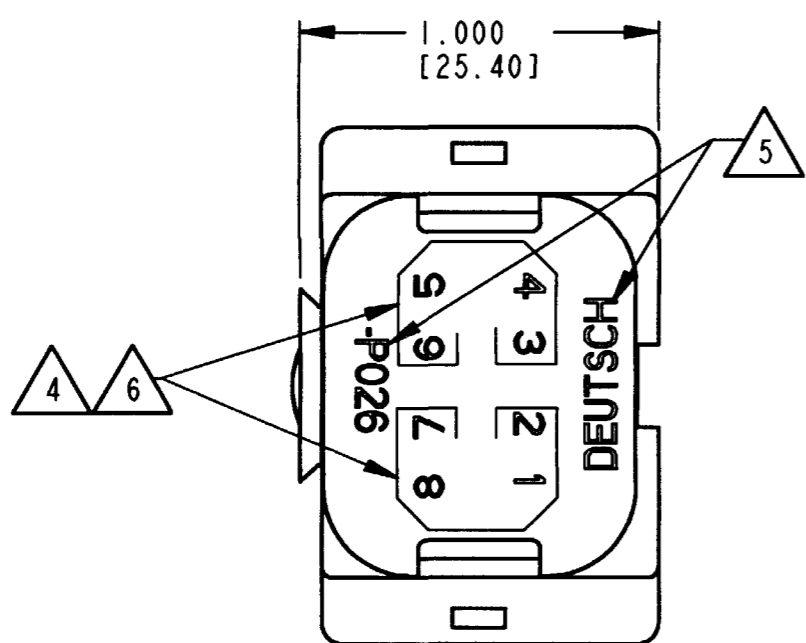

REV	DT04-08PA-P026	REVISIONS		
NC	SYM	DESCRIPTION	DATE	APPROVED
	NC	NEW RELEASE PER E.O. PI6830	9-1-00	RDK

- 5. ORIENTATION OF "DEUTSCH" AND "-P026" TO BE OPTIONAL.
- 4. BORDER SIGNIFIES THAT PINS 1,2,7,8 AND PINS 3,4,5,6 ARE BUSSED TOGETHER WITH 4 PIN BUSBARS.
- 3. THIS DT04-08PA-P026 MATES WITH DT06-08SA-**** (**** = ALL MODIFICATIONS). CONSULT FACTORY FOR MODIFICATIONS.
- 2. DIMENSIONS ARE ±.025[0.63] UNLESS OTHERWISE SPECIFIED.
- 1. DIMENSIONS ARE IN INCHES [MILLIMETERS].

NOTES:

6. THE 4 PIN BUSBAR HAS A MAXIMUM CURRENT RATING OF 26 AMPS.

SIGNATURE & DATE	
DR	P. BURKE 8/24/00
CHK	[Signature] 9/11/00
PE	[Signature] 8/31/00
APPD	[Signature] 8/31/00
SCALE	NONE WT

DT 8 WAY RECEPTACLE
KEY ARRANGEMENT -A-
(2) 4 PIN BUSBARS-NICKEL PLATED
COLOR: GREY

ENVELOPE

CP	MATL. CODE
The Deutsch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
B DT04-08PA-P026	
DWG SIZE	CODE 11139 SHEET OF