


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		C		REVISED PER ECO-15-007761	28MAY2015	RL	DM
		D		REVISED PER PCN E-20-008101	12JUN2020	DM	DM

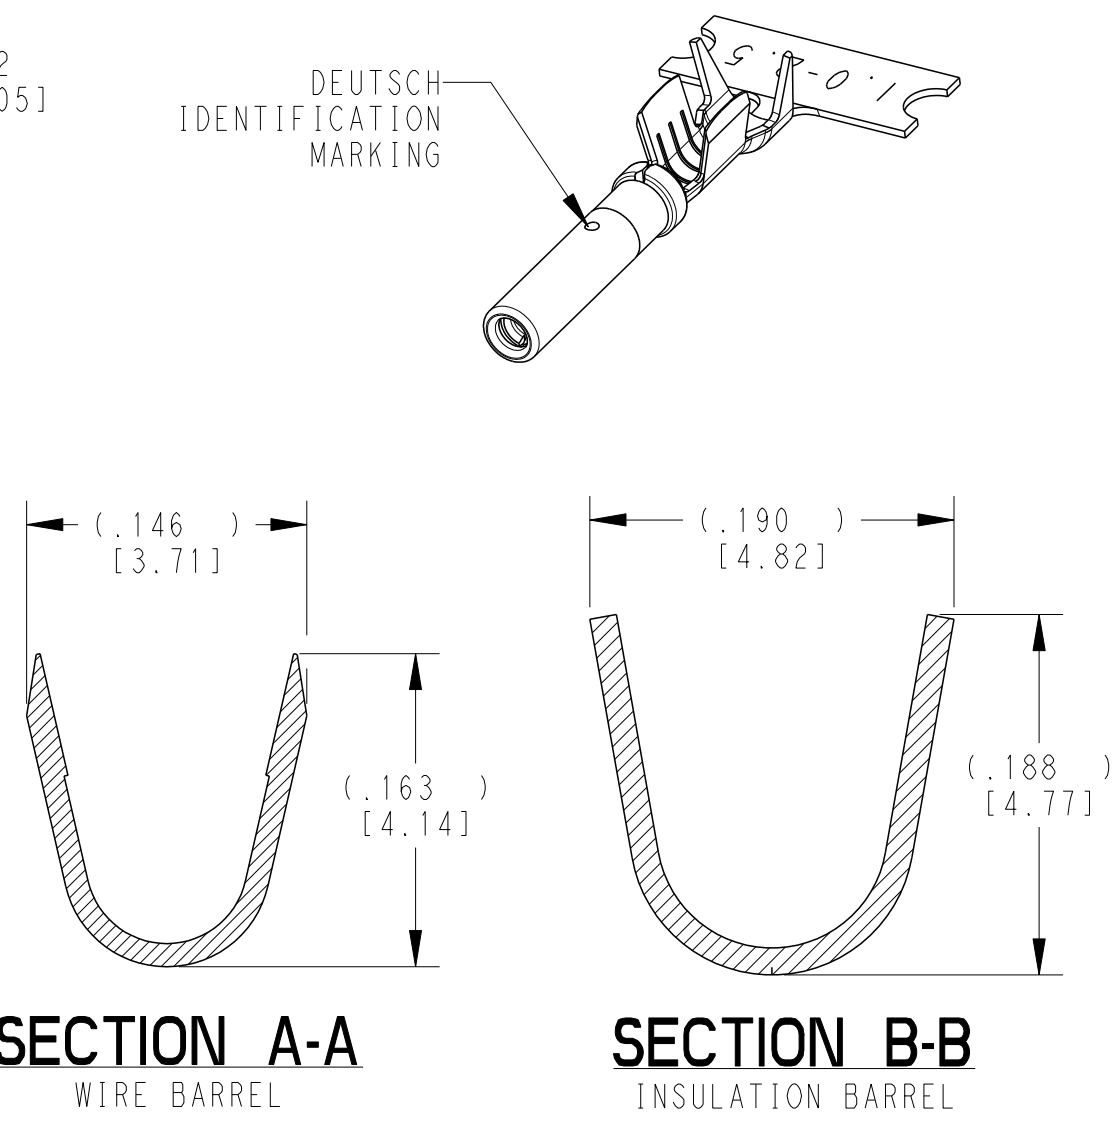

- $\triangle 5$  TIN MAY BE IN THIS REGION.
  - $\triangle 4$  TIN PLATED REGION.
  - $\triangle 3$  MATERIAL:  
 BODY: .014 [0.36] THICK COPPER ALLOY  
 SLEEVE: STAINLESS STEEL
  - 2. WIRE RANGE: 16 AWG TO 12 AWG [1.0-2.5 mm<sup>2</sup>]  
 INSULATION RANGE:  $\varnothing$ .075-.140 [ $\varnothing$ 1.91-3.56]
  - $\triangle 1$  GOLD PLATED REGION.
- NOTES: UNLESS OTHERWISE SPECIFIED

TE INTERNAL PN	DEUTSCH PN	PLATING
1062-16-1222	1062-16-1222	Ni/Cu overall, Sn/Ni/Cu Wire Barrel
1062-16-1244	1062-16-1244	Selective Au, Ni/Cu overall, Sn/Ni/Cu Wire Barrel
1062-16-1277	1062-16-1277	Sn/Ni/Cu overall

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 28 JUN 2000  
 VLADIMIR TOMSA  
 CHK 14 MAR 2002  
 BRICE BYFORD  
 APVD 14 MAR 2000  
 ROBIN REED

**STE** TE Connectivity

NAME: SOCKET, STAMPED AND FORMED  
 SIZE 16  
 12-16AWG

DIMENSIONS: mm [INCHES]  
 TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 PLC ±  
 1 PLC ±  
 2 PLC ±  
 3 PLC ±.025 [0.64]  
 4 PLC ±  
 ANGLES ±

MATERIAL:  $\triangle 3$   
 FINISH: SEE TABLE

PRODUCT SPEC: 108-151000  
 APPLICATION SPEC: 114-151001  
 WEIGHT: 0.50 g

SIZE: A3  
 CAGE CODE: 4AFU8  
 DRAWING NO: C-1062-16-12XX  
 RESTRICTED TO: -

Customer Drawing  
 SCALE: 6:1  
 SHEET: 1 OF 1  
 REV: D