


BNC 50 Ω Adaptor
BNC Plug – UHF Jack

51S154-K00N5

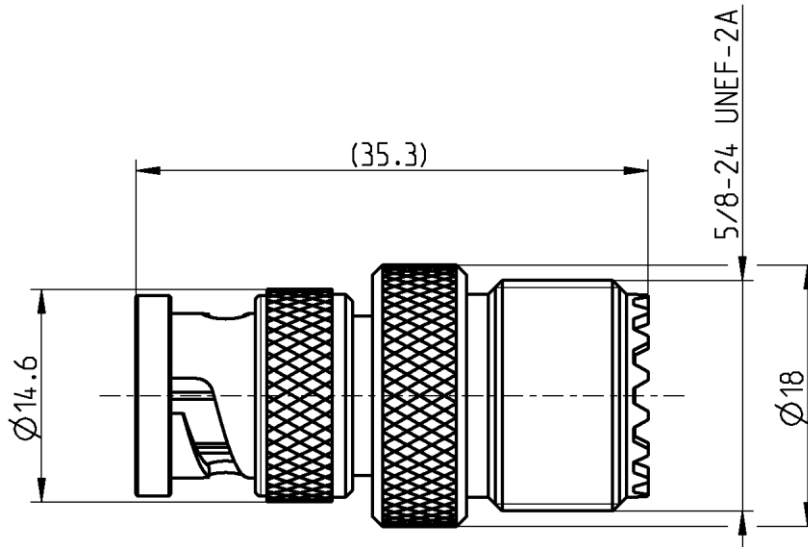

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to	BNC side:	DIN EN 61169-8
	UHF side:	IEC 60169-12

Documents

N/A

Material and plating

Connector parts

Center contact
Outer contact
Body
Dielectric
Gasket

Material

Spring bronze
Brass
Brass
PTFE
NeopreneCR 50C6

Plating

AuroDur®, gold plated
Flash white bronze over silver(e.g. Optargen®)
Flash white bronze over silver(e.g. Optargen®)

Technical Data Sheet

Rosenberger

BNC 50 Ω

Adaptor
BNC Plug – UHF Jack

51S154-K00N5

Electrical data

Impedance	N/A	
Frequency	DC to 300 MHz	
Insulation resistance	≥ 5 x 10 ³ MΩ	
Center contact resistance	≤ 1.5 mΩ, BNC side;	≤ 5 mΩ, UHF side
Outer contact resistance	≤ 1 mΩ, BNC side;	≤ 5 mΩ, UHF side
Test voltage	1500 V rms	
Working voltage	400 V rms	
Contact current (DC)	≤ 10 A typ.	
Power handling (at 20 °C, sea level, VSWR 1.0)	400 W typ. @ 300 MHz	

Mechanical data

Mating cycles	BNC side min. 500	UHF side min. 500
Center contact captivation: axial	≥ 30 N	≥ 30 N

Environmental data

Temperature range	-25°C to +70°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. G
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Tooling

N/A

Suitable cables

N/A

Weight

Weight 28.3 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Chr. Entfellner	17.07.08	Chr. Janßen	21.12.20	f00	20-1927	S. Huber-Siegl	21.12.20
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com				Tel. : +49 8684 18-0 Email : info@rosenberger.com			Page 2 / 2