




# EtherCAT Series Products

## Isolated 8-ch DO and 8-ch DI EtherCAT Slave I/O Module



**ECAT-2055**

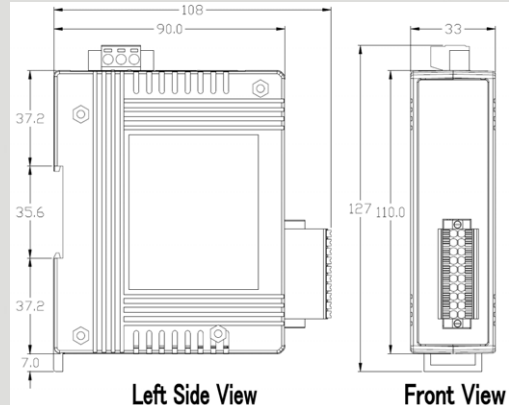

**Dimensions**


The ECAT-2055 is an industrial slave I/O module built in 8 digital inputs and 8 digital outputs. It is equipped with the EtherCAT\* protocol and installed by daisy chain connection that provides a more scalable system with fewer wires. Users can obtain the input and output status not only via the process data but also from its LED indicators. The ECAT-2055 has passed and verified by the conformance test tool, therefore eligible EtherCAT Master or configurator can manipulate it simply and implement your various applications easily.

\* EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.


### Features

- On the fly processing: EtherCAT
- Powerful MCU handles efficient network traffic
- 2 x RJ-45 bus interface
- Distance between stations up to 100 m (100BASE-TX)
- Support daisy chain connection
- EtherCAT conformance test tool verified
- Removable terminal block connector
- LED indicators for the I/O status
- Built-In Inputs and Outputs: 8 DI and 8 DO
- RoHS compliant
- ESD Protection 4 KV Contact for each channel

### Pin Assignment

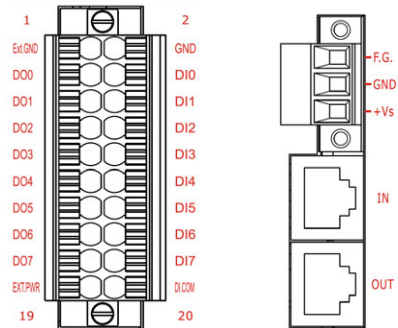

### Application

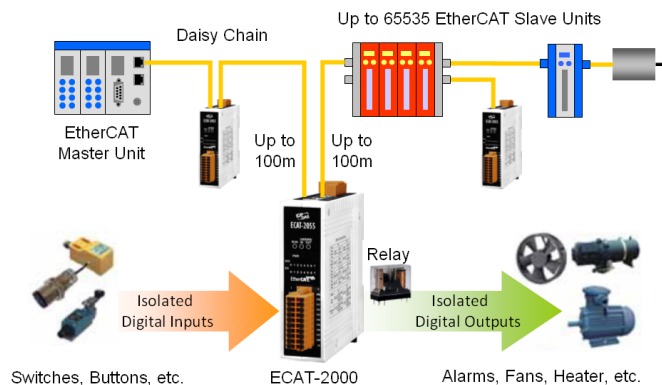

### Wire connection

Output	ON	OFF
Drive Relay		
Resistance Load		
Input	ON	OFF
Relay Contact (Dry)		
Open Collector (Dry)		
Relay Contact (Wet)		
NPN Output (Wet)		



## Hardware Specifications

### Digital Input

Channels	8	
Input Type	Dry (Source)	Wet (Sink/Source)
OFF Voltage Level	Open	+4 V Max.
ON Voltage Level	Close to GND	+10 V ~ +50 V
Photo-Isolation	3750 VDC	

### Digital Output

Channels	8	
Output Type	Open Collector (Sink)	
Load Voltage	+3.5 ~ 50 V	
Max. Load Current	700mA per channel	
Isolation Voltage	3750 V <sub>rms</sub>	

### Communication Interface

Connector	2 x RJ-45	
Protocol	EtherCAT	
Distance between Stations	Max. 100 m (100BASE-TX)	
Data Transfer Medium	Ethernet/EtherCAT Cable (Min. CAT 5), Shielded	

### Power

Input Voltage Range	10V ~ 30VDC	
Power Consumption	Max. 4W	

### Mechanism

Installation	DIN-Rail	
Dimensions	110mm x 90mm x 33mm (H x W x D, without connectors)	
Case Material	UL 94V-0 Housing	

### Environment

Operating Temperature	-25°C ~ 75°C	
Storage Temperature	-30°C ~ 80°C	
Relative Humidity	10 ~ 90%, No Condensation	
ESD (IEC 61000-4-2)	4 KV Contact for Each Channel	
EFT (IEC 61000-4-4)	Signal: 1 KV Class A; Power: 1 KV Class A	
Surge (IEC 61000-4-5)	1 KV Class A	

## Ordering Information

<b>ECAT-2055 CR</b>	EtherCAT Slave I/O Module with Isolated 8-ch DO and 8-ch DI (RoHS)
---------------------	--