

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	650 STR/FLEX
Wire Type	Stranded Copper: Locomotive
Wire Strip Length	3.0 in.
Stud Size	1/2 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90 ° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BLACK
Panduit Die Index No. on Barrel	P 106
Alternate Industry Die Index No. ( ) on Barrel	(24)



CERTIFIED



LISTED  
Wire Connector

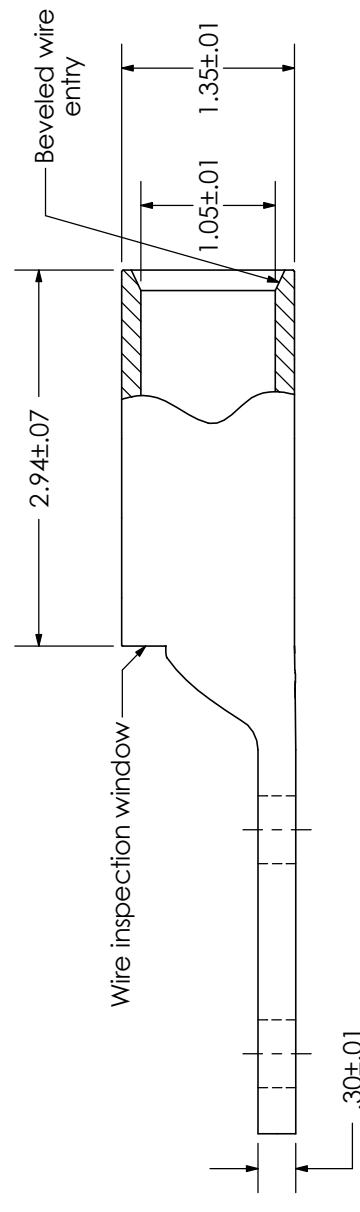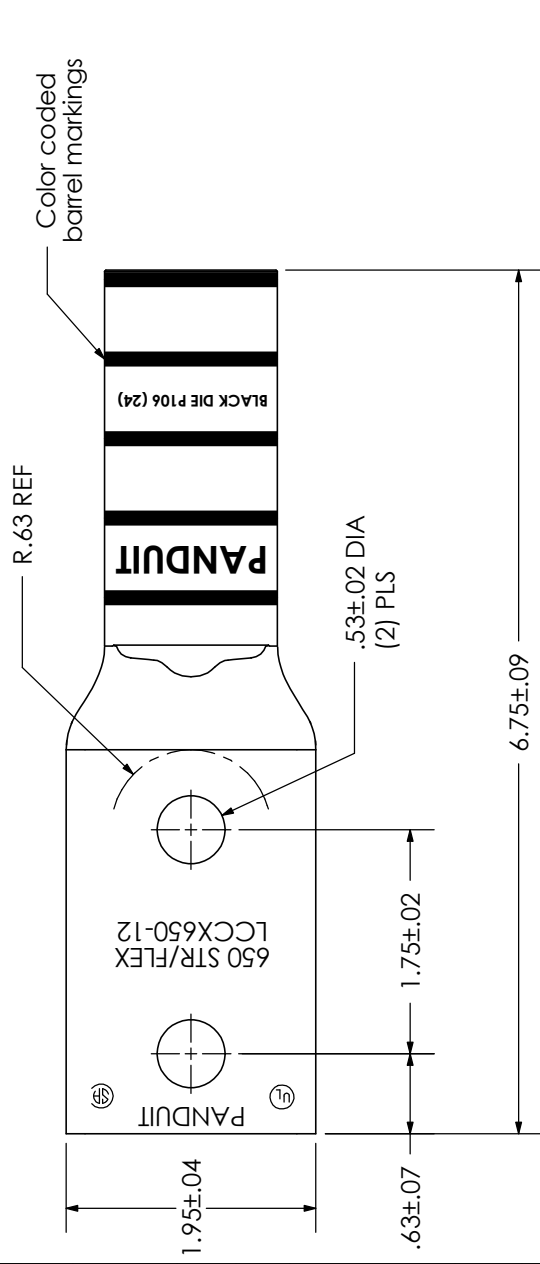

<b>PANDUIT CORP. TINLEY PARK, ILLINOIS</b>	
LCCX650-12-6	
Copper Lug - Two-Hole, Long Flex Barrel with Window	
REV	DESCRIPTION
01	JHNU JHNU REVISD DESCRIPTION TO LONG FLEX BARREL
DATE	BY
4/10	JHNU
CHK	CHK
SCALE	N/A
DRAWING NO / CAD FILE	LCCX650-12-CUST