

RoHS

NOTES:

Insulator Material: PBT, UL 94V-0

Contact Plating: Flash Gold

Contact Material: Brass





Current Rating : 1A AC,DC

Contact Resistance: 20MΩ Max.

Dielectric Withstanding: AC 500V

Insulator Resistance: 1000MΩ Min.

Operating Temp.: -40°C~+105°C

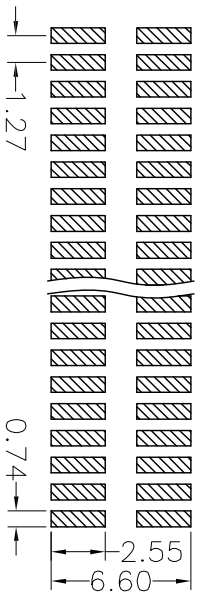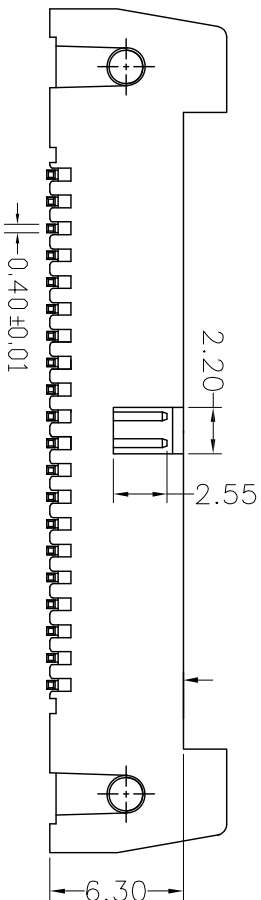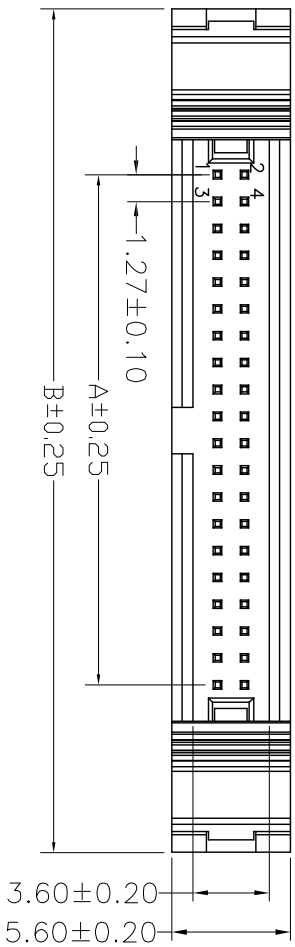

P.C.B LAYOUT


| REV. | DESCRIPTION | DATE |
|------|-------------|------------|
| A | RELEASE | 2012.11.12 |

| NUMBER OF POSITIONS | DIMENSIONS | |
|---------------------|------------|-------|
| | A | B |
| 06 | 2.54 | 18.31 |
| 08 | 3.81 | 19.58 |
| 10 | 5.08 | 20.85 |
| 12 | 6.35 | 22.12 |
| 14 | 7.62 | 23.39 |
| 16 | 8.89 | 24.66 |
| 18 | 10.16 | 25.93 |
| 20 | 11.42 | 27.20 |
| 24 | 13.97 | 29.74 |
| 26 | 15.24 | 31.01 |
| 30 | 17.78 | 33.55 |
| 34 | 20.32 | 36.09 |
| 40 | 24.13 | 39.90 |
| 50 | 30.48 | 46.25 |
| 60 | 36.83 | 52.60 |
| 64 | 39.37 | 55.14 |

CnC Tech,LLC

3210-XX-003-11-00

| UNLESS TOLERANCE | | DRAW BY | |
|------------------|-------------|-----------|----------|
| GENERAL | ANGLE | DESIGN BY | CHECK BY |
| X ± 0.30 | X° ± 3.0° | | |
| .X ± 0.20 | .X° ± 2.0° | | |
| .XX ± 0.15 | .XX° ± 1.0° | | |
| .XXX ± 0.08 | .XXX ± 0.5° | | |
| | | SCALE | SHEET |
| | | 1:1 | 1/1 |
| | | MM | UNIT |



SCALE 1:1
SHEET 1/1
UNIT MM

DRAW NO:

REV: A