

PulseLARSEN *Antennas*

**Multi-band Antennas for Vehicle,
IoT and M2M Applications**



YOUR INTRODUCTION TO PULSELARSEN MULTI-BAND ANTENNAS.

Want to learn more? Visit our website at pulselarsenantennas.com

PULSELARSEN MULTI-BAND ANTENNAS

Whether your need is for antennas for police, utility trucks, ambulances, agricultural or recreational vehicles, public transportation or remote monitoring and control PulseLarsen has your multi-band solution. For over 50 years we have produced vehicular/outdoor ruggedized antennas. Our expertise covers 3G/4G(LTE), WiFi, GPS(GNSS), ISM, and other Technologies.

For precise navigation our solutions cover all satellite navigation types including GPS, GLONASS, Beidou/

Compass, and Galileo. Plus we have products that combine navigation with data transmission for complete telematics requirements. Our navigation antennas are designed for use in trucking, commercial fleets, utility, public safety, search and rescue, GPS and mapping markets.

For utility applications we offer extensive ruggedized, tamper-proof and aesthetically pleasing solutions. Our offering includes antennas with lowest profile, steel mounting studs with steel nuts, UV-Rated plastics and other features to keep idle hands from tampering with the antenna.

MULTI-BAND ANTENNA SUMMARY



		Panther	Jaguar	Armadillo (Now Sampling)	Razorback	FIN	DISC
		<ul style="list-style-type: none"> Best Performance Low Cost Best Gain, Efficiency, VSWR, and Port-to-Port Isolation 	<ul style="list-style-type: none"> Low profile Good Performance Various Install Methods 	<ul style="list-style-type: none"> Low Profile Good Performance Tamper-proof steel stud 'Narrowest Package' 	<ul style="list-style-type: none"> Best Performance Narrow Profile, Tamper-proof steel stud 	<ul style="list-style-type: none"> Best Performance Aesthetically pleasing 	<ul style="list-style-type: none"> Good Performance. ISM Options
No. of Ports	Baseline Configuration						
6	LTE - (2x) WiFi -Dual Band (3x) GPS -full GNSS (1x)	✓	✓	✓	✓		
5	LTE - (2x) WiFi -Dual Band (2x) GPS -full GNSS (1x)	✓	✓	✓	✓		
4	LTE - (2x) WiFi -Dual Band (1x) GPS -full GNSS (1x)	✓	✓	✓	✓		
3	LTE - (2x) GPS -full GNSS (1x) or LTE (1x) WiFi-Dual Band (1x) GPS-full GNSS (1x)	✓	✓	✓	✓	✓	✓
2	3G - or ISM - (1x) GPS -Full GNSS (1x) or LTE (1x) GPS-full GNSS (1x) or LTE (2x)		✓	✓	✓	✓	✓
Color Options		Black, White	Black	Black, White	White	Black, White	Black
Ideal Placement		Either: On Ground Plane; or On Non-Metal Surface	Either: On Non-Metal Surface; or On Ground Plane if base used.	On Ground Plane	Either: On Ground Plane ; or On Non-Metal Surface	On Ground Plane	Either: On Ground Plane ; or On Non-Metal Surface
Package Available Mounting		Direct Mount Stud (Magnetic Mount available)	Adhesive Mount (Magnetic Mount and Fixed Mount Adapters available)	Direct Mount Stud (Magnetic Mount versions available)	Direct Mount Stud (Magnetic Mount versions available)	Direct Mount Stud	Direct Mount Stud (Magnetic Mount Versions Available)

On Ground Plane: Best if installed on metal vehicle roof, metal utility box, or other metal structure.
On Non-Metal: Best if installed on fiberglass, plastic, or other non-metallic surface.
Contact factory if any concerns about installation methods.



PANTHER FAMILY

JAGUAR FAMILY

ARMADILLO FAMILY

RAZORBACK FAMILY

DISC FAMILY

FIN FAMILY

PANTHER - GPSMBXXX
FIN - GPSDMXXX
DISC - W4165XXX



Every effort is made to assure the integrity and long life of each Pulse product. In the unfortunate event a problem does occur, you will find us ready to make it right!

Duration of warranty is one year from date of purchase.

Pulse will repair or replace without charge any Larsen antenna product which fails for any reason during the warranty period. Pulse is not responsible for any incidental or consequential damages due to failure of the antenna under this warranty or any implied warranty. This exclusion may not apply to all areas of the USA or Canada.



PANTHER (PAN, GPSMB)							PANTHER (PAN, GPSMB)								
Model Part Number	Numbers of Cables	Application	ELECTRICAL SPECS				MECHANICAL SPECS					ENVIRONMENTAL SPECS			
			Frequency (MHz)	VSWR *	Peak Gain*** (dBi, Average)	Isolation* (dB)	Dimension mm (inch)	Mounting Method	Cable Type	Cable Length (ft/ mm)	Connector	Radome color	Operating Temp.	Radome	Weather Resistance
PAN62311DM (Black radome) PAN62312DM (White)	6	LTE 1	698-960/ 1695-2700/ 2900-3600	< 1.5	4 @698-2170MHz	-15	L: 164.5 (6.48") x W: 151.9 (5.98") x H: 76 (3.0")	Direct mount, 7/8" (22mm) threaded through-hole	RG 58	17ft / 5180mm	SMA(m)	Black or White	-40C to +85C (MIL-STD 810G)	ABS/PC UV stable, UL-94HB	IP67
		LTE 2			5 @2170-3600MHz				RG 58		SMA(m)				
		WLAN 1	2400-2500/ 4900-5925	< 1.5	4.5 @ 2.4GHz, 5 @ 5GHz	-40			RG 58		RP-SMA(m)				
		WLAN 2							RG 58		RP-SMA(m)				
		WLAN 3							RG 58		RP-SMA(m)				
GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.5dB, DC power: 3-5V		RG 174	SMA(m)									
GPSMB501 (Black radome) GPSMB502 (White)	5	LTE 1	698-960/ 1695- 2700/2900-3600	< 1.5	4 @698-2170MHz	-15	L: 164.48 (6.48) W:151.85 (5.98) H: 76 (3)	Direct mount, 7/8" (22mm) threaded through-hole	RG 58	17ft/ 5180mm	SMA(m)	Black or White	-40C to +85C (MIL-STD 810G)	ABS/PC UV stable, UL-94HB	IP67
		LTE 2			5 @2170-3600MHz				RG 58		SMA(m)				
		WLAN 1	2400-2500/ 4900-5925	< 1.4	4.5 @ 2.4GHz, 5 @ 5GHz	-40			RG 58		RP-SMA(m)				
		WLAN 2							RG 58		RP-SMA(m)				
		GNSS							1559-1607		< 2				
GPSMB401 (Black) GPSMB402 (White)	4	LTE 1	698-960/ 1695- 2700/2900-3600	< 1.5	4 @698-2170MHz	-15	L: 164.48 (6.48) W:151.85 (5.98) H: 76 (3)	Direct mount, 7/8" (22mm) threaded through-hole	RG 58	17ft/ 5180mm	SMA(m)	Black or White	-40C to +85C (MIL-STD 810G)	ABS/PC UV stable, UL-94HB	IP67
		LTE 2			5 @2170-3600MHz				RG 58		SMA(m)				
		WLAN	2400-2500/ 4900- 5925	< 1.4	4.5 @ 2.4GHz, 5 @ 5GHz	N/A			RG 58		RP-SMA(m)				
		GNSS							1559-1607		< 2				
GPSMB301 (Black) GPSMB302 (White)	3	LTE 1	698-960/ 1695- 2700/2900-3600	< 1.5	6 @698-2170MHz	-15	L: 164.48 (6.48) W:151.85 (5.98) H: 76 (3)	Direct mount, 7/8" (22mm) threaded through-hole	RG 58	17ft/ 5180mm	SMA(m)	Black or White	-40C to +85C (MIL-STD 810G)	ABS/PC UV stable, UL-94HB	IP67
		LTE 2			5.5 @2170-3600MHz				RG 58		SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.5dB, DC power: 3-5V				RG 174		SMA(m)				
GPSMBMM	Magnetic Mount Bracket						Magnetic Mount Bracket								
GPSDM (FIN FAMILY:SKF)							GPSDM (FIN FAMILY: SKF)								
Model Part Number	Numbers of Cables	Application	ELECTRICAL SPECS				MECHANICAL SPECS					ENVIRONMENTAL SPECS			
			Frequency (MHz)	VSWR *	Peak Gain ** (dBi, Average)	Isolation* (dB, Min.)	Dimension mm (inch)	Mounting Method	Cable Type	Cable Length (ft/ mm)	Connector	Radome color	Operating Temp.	Radome	Weather Resistance
GPSDM700/ 5800GGT (Black) GPSDMW 700/5800GGT (White)	3	LTE	698-960/ 1710-2700	< 2.5	4.4 @698-960MHz, 6.5 @1710-2690MHz	-10	Dia.: 108 (4.26) H: 88.3 (3.48)	Direct mount, 3/4" (19.3mm) threaded through-hole	RG 58	17ft/ 5180mm	SMA(m)	Black or White	-40C to +85C (MIL-STD 810G)	UV stable, UL-94	IP67
		WLAN	2400-2485/ 5150- 5875	< 2	3 @ 2.4GHz, 5 @ 5GHz	-10 (vs LTE)			RG 58		RP-SMA(m)				
		GPS	1575.42	< 2	LNA gain:28dB, NF: < 1.3dB, DC power: 3.3-5V				RG 174		SMA(m)				
GPSDM700/ 5900GG	2	LTE	698-960/ 1710-2700	< 2.5	4.4 @698-960MHz, 6.5 @1710-2690MHz	-10	Dia.: 108 (4.26) H: 88.3 (3.48)	Direct mount, 3/4" (19.3mm) threaded through-hole	RG 58	17ft/ 5180mm	SMA(m)	Black (White available)	-40C to +85C (MIL-STD 810G)	UV stable, UL-94	IP67
		GPS	1575.42	< 2	LNA gain:28dB, NF: < 1.3dB, DC power: 3.3-5V				RG 174		SMA(m)				
W4165 (DISC FAMILY: DSC)							W4165 (DISC: DSC)								
Model Part Number	Numbers of Cables	Application	ELECTRICAL SPECS				MECHANICAL SPECS					ENVIRONMENTAL SPECS			
			Frequency (MHz)	VSWR*	Peak Gain*** (dBi, Average)	Isolation* (dB, Min.)	Dimension mm (inch)	Mounting Method	Cable Type	Cable Length (ft/ mm)	Connector	Radome color	Operating Temp.	Radome	Weather Resistance
W4165	2	GSM/UMTS or ISM	824-960/ 1710-2170	< 2	2 @824-960, 2 @1710- 2170MHz	-10	Dia.: 100 (3.94) H: 34.8 (1.37)	Direct mount, 3/4" (19mm) Thread hole	RG 58	13.2ft/ 4000mm	SMA(m)	Black	-40C to +85C	UV stable, UL-94	IP67
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG 174		SMA(m)				
W4165MM	2	GSM/UMTS or ISM	824-960/ 1710-2170	< 2	3 @824-960, 4.5 @ 1710-2170MHz	-10	Dia.: 100 (3.94) H: 34.8 (1.37)	Magnetic Mount	RG 58	13.2ft/ 4000mm	SMA(m)	Black	-40C to +85C	UV stable, UL-94	IP67
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG 174		SMA(m)				

* Measured with a default cable length in free space. ** Measured with 6inch cable with 40" GP.
 *** Measured with 4" cable with 24" GP. Attenuation of cable assembly with 17' RG58 is 4.6dB @2.7GHz and 7.3dB @6GHz.

- Frequency detail of GNSS: 1561.098MHz±2.046/ 1575.42MHz±1.023/ 1602.5625MHz±4
 - Please contact sales for options of customized cable type, cable length, and connector type.



- Low Profile
- Good Performance
- Narrowest Package
- Tamper-proof steel stud


ARMADILLO (ARM)							ARMADILLO (ARM)								
Model Part Number	Numbers of Cables	Application	ELECTRICAL SPECS			MECHANICAL SPECS				ENVIRONMENTAL SPECS					
			Frequency (MHz)	VSWR *	Peak Gain ** (dBi, Average)	Isolation* (dB)	Dimension mm (inch)	Mounting Method	Cable Type	Cable Length (ft/ mm)	Connector	Radome color	Operating Temp.	Radome	Weather Resistance
ARM62311DM (Black radome) ARM62312DM (White radome)	6	LTE 1	698-2700	< 2.5	1.5 @698-960MHz	-10	L: 202 (7.9) W: 88 (3.4) H: 45 (1.8)	Direct mount, 3/4" (19mm) threaded through-hole	LMR195	17ft	SMA(m)	White or Black	-40C to +85C	UV stable, UL-94	IP67
		LTE 2							LMR195	17ft	SMA(m)				
		WLAN 1							LMR195	17ft	RP-SMA(m)				
		WLAN 2	2400-2500/ 5150-5900	< 2	3 @ 2.4GHz, 5 @ 5GHz	-10 (vs LTE)			LMR195	17ft	RP-SMA(m)				
		WLAN 3	2400-2500/ 5150-5900	< 2	3 @ 2.4GHz, 5 @ 5GHz	-10 (vs LTE)			LMR195	17ft	RP-SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG174	17ft	SMA(m)				
ARM52211DM (Black radome) ARM52212DM (White radome)	5	LTE 1	698-2700	< 2.5	1.5 @698-960MHz	-10	L: 202 (7.9) W: 88 (3.4) H: 45 (1.8)	Direct mount, 3/4" (19mm) threaded through-hole	LMR195	17ft	SMA(m)	White or Black	-40C to +85C	UV stable, UL-94	IP67
		LTE 2			4.5 @1710-2690MHz				LMR195	17ft	SMA(m)				
		WLAN 1	2400-2500/ 5150-5900	< 2	3 @ 2.4GHz, 5 @ 5GHz	-10 (vs LTE)			LMR195	17ft	RP-SMA(m)				
		WLAN 2	2400-2500/ 5150-5900	< 2	3 @ 2.4GHz, 5 @ 5GHz	-10 (vs LTE)			LMR195	17ft	RP-SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG174	17ft	SMA(m)				
ARM42111DM (Black) ARM42112DM (White)	4	LTE 1	698-2700	< 2.5	1.5 @698-960MHz	-10	L: 202 (7.9) W: 88 (3.4) H: 45 (1.8)	Direct mount, 3/4" (19mm) threaded through-hole	LMR195	17ft/ 5180mm	SMA(m)	Black or White	-40C to +85C	UV stable, UL-94	IP67
		LTE 2			4.5 @1710-2690MHz				LMR195		SMA(m)				
		WLAN	2400-2500/ 5150-5900	< 2	3 @ 2.4GHz, 5 @ 5GHz	-10 (vs LTE)			LMR195		RP-SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG174		SMA(m)				
ARM32011DM (Black) ARM32012DM (White)	3	LTE 1	698-2700	< 2.5	1.5 @698-960MHz	-10	L: 202 (7.9) W: 88 (3.4) H: 45 (1.8)	Direct mount, 3/4" (19mm) threaded through-hole	LMR195	17ft/ 5180mm	SMA(m)	Black or White	-40C to +85C	UV stable, UL-94	IP67
		LTE 2			4.5 @1710-2690MHz				LMR195		SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG174		SMA(m)				
ARM42111MM (Black, Magnet Mount) ARM42112MM (White, Magnet Mount)	4	LTE 1	698-2700	< 2.5	1.5 @698-960MHz	-10	L: 202 (7.9) W: 88 (3.4) H: 45 (1.8)	Magnetic mount	LMR195	17ft/ 5180mm	SMA(m)	Black or White	-40C to +85C	UV stable, UL-94	IP67
		LTE 2			4.5 @1710-2690MHz				LMR195		SMA(m)				
		WLAN	2400-2500/ 5150-5900	< 2	3 @ 2.4GHz, 5 @ 5GHz	-10 (vs LTE)			LMR195		RP-SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG174		SMA(m)				
ARM42111AM (Black, Adhesive Mount) ARM42112AM (White, Adhesive Mount)	4	LTE 1	698-2700	< 2.5*	1 @698-960MHz	-15*	L: 202 (7.9) W: 88 (3.4) H: 45 (1.8)	Adhesive mount	LMR195	17ft/ 5180mm	SMA(m)	Black or White	-40C to +85C	UV stable, UL-94	IP67
		LTE 2			3.5 @1710-2690MHz*				LMR195		SMA(m)				
		WLAN	2400-2500/ 5150-5900	< 2*	3 @ 2.4GHz, 5 @ 5GHz*	-10 (vs LTE)*			LMR195		RP-SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG174		SMA(m)				

* Measured with a default cable length in free space. + Measured without Ground Plane (GP). ++Measured with 1" bracket and 40" GP.
** Measured with 6" cable with 40" GP. Attenuation of cable assembly with 17' LMR195 is 3.8dB @2.7GHz and 5.8dB @6GHz.

- Frequency detail of GNSS: 1561.098MHz±2.046/ 1575.42MHz±1.023/ 1602.5625MHz±4
- Please contact sales for options of customized cable length and connector type.



- Low profile
- Good Performance
- Various Install Methods
- Excellent off-ground plane performance
- Ideal for plastic and fiberglass mounting
- Idea for bracket mounting

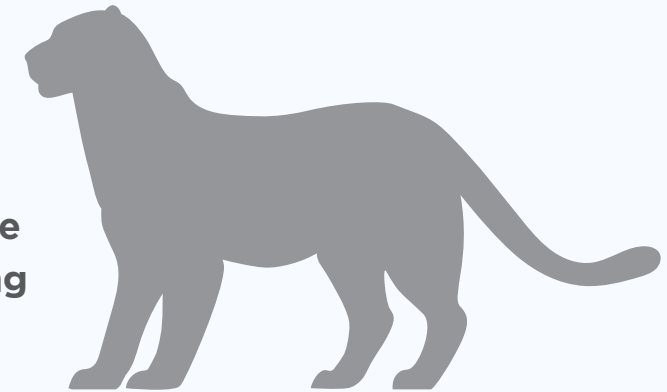

JAGUAR							JAGUAR								
Model Part Number	No. of Cables	Application	ELECTRICAL SPECS				MECHANICAL SPECS					ENVIORNMENTAL SPECS			
			Frequency (MHz)	VSWR *	Peak Gain (dBi, Average)	Isolation (dB, Min.)	Dimension mm (inch)	Mounting Method	Cable Type	Cable Length	Connector	Radome color	Operating Temp.	Radome	Weather Resistance
GPSLPMB401+	4	LTE 1	698-960/ 1710-2690	< 2.5	4.4 @698-960MHz 5.4 @1710-2690MHz	-10	L: 145 (5.7) W: 136 (5.3) H: 25 (0.98)	Adhesive mount	LMR195	3000mm	SMA(m)	Black	-40C to +85C	UV stable, UL-94	IP67
		LTE 2							LMR195	3000mm	SMA(m)				
		WLAN 1	2400-2500/ 5150-5900	< 3	3 @ 2.4GHz, 5 @ 5GHz	-10 (vs LTE)			LMR195	3000mm	RP-SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				LMR100	3000mm	SMA(m)				
GPSLPMB403+	4	LTE 1	698-960/ 1710-2690	< 2.5	7 @698-960MHz 8 @1710-2690MHz	-8	L: 145 (5.7) W: 136 (5.3) H: 25 (0.98)	Adhesive or Magnetic mount with LPMB4 Bracket MM bracket	LMR195	3000mm	SMA(m)	Black	-40C to +85C	UV stable, UL-94	IP67
		LTE 2							LMR195	3000mm	SMA(m)				
		WLAN 1	2400-2500/ 5150-5900	< 3	3 @ 2.4GHz, 5 @ 5GHz	-10 (vs LTE)			LMR195	3000mm	RP-SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				LMR100	3000mm	SMA(m)				
LPMB405+	4	LTE 1	698-960/ 1710-2690	< 2.5	4.4 @698-960MHz 5.4 @1710-2690MHz	-10	L: 145 (5.7) W: 136 (5.3) H: 25 (0.98)	Adhesive mount	LMR195	3000mm	SMA(m)	Black	-40C to +85C	UV stable, UL-94	IP67
		LTE 2							LMR195	3000mm	SMA(m)				
		WLAN 1	2400-2500/ 5150-5900	< 3	4.5 @ 2.4GHz 5.5 @ 5GHz	-15			LMR100	3000mm	RP-SMA(m)				
		WLAN 2							LMR100	3000mm	RP-SMA(m)				
W1919+**	2	LTE 1	698-960/ 1710-2690	< 2.0	1.0 @698-960; 3.4 @1710-2690MHz	-10	L: 78.2 (3.1) W: 78.2 (3.1) H: 30.3 (1.2)	Adhesive mount	RG 174	3000mm	SMA(m)	Black	-40C to +85C	UV stable, UL-94	IP67
		LTE 2	698-960/ 1710-2690	< 2.0	0.2 @698-960; 3.0 @1710-2690MHz	-10			RG 174	3000mm	SMA(m)				

* Measured with a default cable length in free space. Attenuation of cable assembly with 17' LMR195 is 3.8dB @2.7GHz and 5.8dB @6GHz.

** W1919 is slightly smaller than rest of Jaguar family. See datasheet for details.

+ Jaguar family is Ground Plane (GP) independent and works best on plastic, fiberglass surfaces or in free space, away from metal. For situations where Jaguar must be place on metal surface, an adapter bracket is available to provide proper distance from metal if desire.

- Frequency detail of GNSS: 1561.098MHz±2.046/ 1575.42MHz±1.023/ 1602.5625MHz±4

- Please contact sales for options of customized cable length and connector type.



- Best Performance
- Narrow Profile
- Tamper-proof Steel Stud

RAZORBACK							RAZORBACK								
Model Part Number	No. of Cables	Application	ELECTRICAL SPECS				MECHANICAL SPECS					ENVIROMENTAL SPECS			
			Frequency (MHz)	VSWR *	Peak Gain ** (dBi, Average)	Isolation (dB, Min.)	Dimension mm (inch)	Mounting Method	Cable Type	Cable Length	Connector	Radome color	Operating Temp.	Radome	Weather Resistance
RAZ62311DM (Black) RAZ62311DM (White)	6	LTE 1	644-2700	< 2.5	3 @698-960MHz 4.5 @1710-2690MHz	-10	L: 193 (7.6) W: 87 (3.4) H: 92 (3.6)	Direct mount, 1" threaded through-hole	LMR195	17ft	SMA(m)	White or Black	-40C to +85C	UV stable, UL-94	IP67
		LTE 2							LMR195	17ft	SMA(m)				
		WLAN 1	2400-2500/ 5150-5900	< 2	4.5 @ 2.4GHz; 5.5 @ 5GHz	-15			LMR195	17ft	RP-SMA(m)				
		WLAN 2	2400-2500/ 5150-5900	< 2	4.5 @ 2.4GHz; 5.5 @ 5GHz	-15			LMR195	17ft	RP-SMA(m)				
		WLAN 3	2400-2500/ 5150-5900	< 2	4.5 @ 2.4GHz; 5.5 @ 5GHz	-15			LMR195	17ft	RP-SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG174	17ft	SMA(m)				
RAZ501 (White radome) RAZ502 (Black radome)	5	LTE 1	644-2700	< 2.5	3 @698-960MHz 4.5 @1710-2690MHz	-10	L: 193 (7.6) W: 87 (3.4) H: 92 (3.6)	Direct mount, 1" threaded through-hole	LMR195	17ft	SMA(m)	Black	-40C to +85C	UV stable, UL-94	IP67
		LTE 2							LMR195	17ft	SMA(m)				
		WLAN 1	2400-2500/ 5150-5900	< 2	4.5 @ 2.4GHz 5.5 @ 5GHz	-15			LMR195	17ft	RP-SMA(m)				
		WLAN 2	2400-2500/ 5150-5900	< 2	4.5 @ 2.4GHz 5.5 @ 5GHz	-15			LMR195	17ft	RP-SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG174	17ft	SMA(m)				
RAZ401 (White radome) RAZ402 (Black radome)	4	LTE 1	644-2700	< 2.5	3 @698-960MHz 4.5 @1710-2690MHz	-10	L: 193 (7.6) W: 87 (3.4) H: 92 (3.6)	Direct mount, 3/4" (19mm) threaded through-hole	LMR195	17ft	SMA(m)	Black	-40C to +85C	UV stable, UL-94	IP67
		LTE 2							LMR195	17ft	SMA(m)				
		WLAN 1	2400-2500/ 5150-5900	< 2	3 @ 2.4GHz, 5 @ 5GHz	-10 (vs LTE)			LMR195	17ft	RP-SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG174	17ft	SMA(m)				
RAZ301 (White radome) RAZ302 (Black radome)	3	LTE 1	644-2700	< 2.5	3 @698-960MHz 4.5 @1710-2690MHz	-10	L: 193 (7.6) W: 87 (3.4) H: 92 (3.6)	Direct mount, 3/4" (19mm) threaded through-hole	LMR195	17ft	SMA(m)	White	-40C to +85C	UV stable, UL-94	IP67
		LTE 2							LMR195	17ft	SMA(m)				
		GNSS	1559-1607	< 2	LNA gain:30dB, NF: < 2.4dB, DC power: 3.3-5V				RG174	17ft	SMA(m)				

* Measured with a default cable length in free space. + Measured without Ground Plane (GP). ++Measured with 1" bracket and 40" GP.
** Measured with 6" cable with 40" GP. Attenuation of cable assembly with 17' LMR195 is 3.8dB @2.7GHz and 5.8dB @6GHz.

- Frequency detail of GNSS: 1561.098MHz±2.046/ 1575.42MHz±1.023/ 1602.5625MHz±4
- Please contact sales for options of customized cable length and connector type.

MANUFACTURING CAPABILITIES - AVAILABLE TRADITIONAL TECHNOLOGIES

- Stamping
- Plastic injection molding
- Heatsteking
- Welding (Spot, USW, Induction)
- Plasma Treatment
- Flexible Printed Circuit
- PAD printing, Painting
- In-House Ceramic Process
- Any Cable Assemblies
- Any Connector Mounts
- SMD Process
- Automatic Cable Stripping
- Epoxy resins and Glue deposition
- Plastic Dipping
- RF Testing
- Any Connector Mounts
- Auto Packaging and Labeling

PROTOTYPING ABILITIES WORLDWIDE (AMERICAS, EMEA, ASIA)

3D printing plastic parts, FR4 or Stamping parts using LPKF machines, CNC, Platisol Dipping techniques, Lathes, Milling machines...

TESTING SERVICES - TESTING CAPABILITIES FOR PRODUCT QUALIFICATION AND DESIGN VALIDATION

ELECTRICAL

- S-Parameters using VNA up to 14GHz
- Impedance
- Insertion Losses
- Isolation
- Portable VNA for on-site Tuning with customers
- 3D radiation Patterns using Worldwide anechoic chambers Satimo/ETS)
- 3D RF simulation tools (CST, Optenni, Ibwave, AWR)
- WiFi Throughput testing using IXIA Chariot
- Expertise in advance RF behaviours with/without body

MECHANICAL

- Ability to use Solidworks, Catia VS, Pro E, ProgeCAD
- 3D fitting and rendering
- Mechanical Shock
- Solderability
- Tensile Strength
- Pull Force
- Torque testing
- Surface Profilometer

ENVIRONMENTAL

- ESD enviroment for Production &/or Design
- Humidity (to 90% RH)
- Moisture Resistance
- Thermal Shock
- Thermal Cycling with/without salt mist
- Aging
- Vibrations

NOTE: Full EMC Standards Compliance Testing in Germany for any vehicle size (Truck, Car, Tractor, Escalator, Agricultural machines and IoT).

CHANGES / CONDITIONS: Continual research and development make it necessary for Pulse to reserve the right to make exceptions to or changes in policies, specifications and prices without notice.

CONTACT US TODAY!



Call us at **+1.800.ANTENNA**



Visit our website at: **pulselarsenantennas.com**



Connect with us on twitter: **PulseLarsen1**



Worldwide Headquarters
San Diego, CA, USA
15255 Innovation Drive #100
San Diego, CA 92128
+1-858-674-8100

PulseLarsen Antennas Headquarters
Vancouver, WA, USA
18110 SE 34th Street
Suite 250, Building 2
Vancouver, WA 98683
Tel: **+1-360-944-7551**
antennas.us@pulseelectronics.com


Europe - Finland
Automaatiotie 1, FI-90440 Oulunsalo.
Tel: **+358.20.7935.500**
antennas.eu@pulseelectronics.com

Europe - Germany
Campus Berliner Allee
Berliner Allee 65 D-64295
Darmstadt Germany
Tel: **+49.73.659.85.21**
antennas.eu@pulseelectronics.com

ISO Manufacturing Site
No 99. Huo Ju road, Suzhou new District,
Jiangsu Province, Suzhou, China, PRC.
Tel: **+86.512.69206053**
antennas.as@pulseelectronics.com

For the best match between our antennas and the latest cellular access devices from Sierra Wireless, Cradlepoint, CalAmp, Digi, Cloudgate and other top manufacturers

CHECK OUT PULSELARSEN'S CELLULAR MODEM CROSS REFERENCE



VERSION 2