


PART NUMBER	CABLE LENGTH	
	INCHES	MILLIMETERS
TT161	6.00 ±0.50	[152.4 ±12.7]
TT162	12.00 ±0.50	[304.8 ±12.7]
TT163	18.00 ±0.50	[457.2 ±12.7]
TT164	24.00 ±1.00	[609.6 ±25.4]
TT165	30.00 ±1.00	[762.0 ±25.4]
TT166	36.00 ±1.00	[914.4 ±25.4]
TT167	48.00 ±1.00	[1219.2 ±25.4]
TT168	60.00 ±1.00	[1524.0 ±25.4]
TT169	72.00 ±1.00	[1828.8 ±25.4]
TT170	84.00 ±1.00	[2133.6 ±25.4]
TT171	96.00 ±1.00	[2438.4 ±25.4]
TT172	108.00 ±1.00	[2743.2 ±25.4]
TT173	120.00 ±1.00	[3048.0 ±25.4]
TT174	132.00 ±1.00	[3352.8 ±25.4]
TT175	144.00 ±1.00	[3657.6 ±25.4]

NOTES:

1. MATERIALS:
 CABLE - 4 CONDUCTOR, 24 AWG, SHIELDED, GRAY PVC JACKET
 PLUG - BRASS, THERMOPLASTIC INSUATORS
 OVERMOLD - GRAY PVC

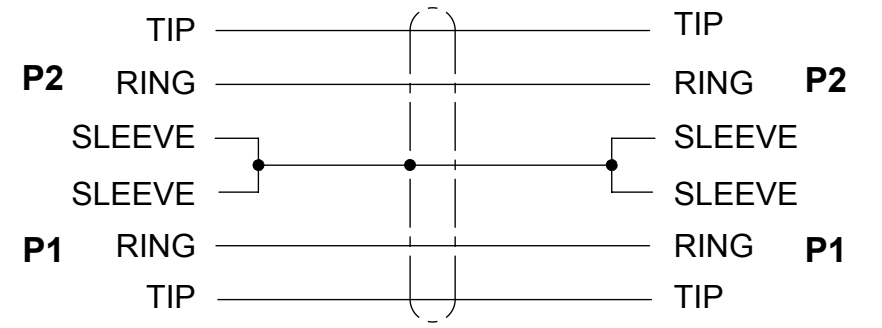

WIRING DIAGRAM

CUSTOMER DRAWING

					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.					
					SIZE	WIDTH	MULT	LBS/M	TEMPER	
					UNLESS OTHERWISE SPECIFIED			FINISH		
					1. ALL DIMENSIONS IN INCHES [mm]			MATERIAL		
					- TWO PLACE DECIMALS ±0.02 [0.5]			SPEC No.		
					- THREE PLACE DECIMALS ±0.005 [0.13]			SCALE		
								1.5:1		
					DATE DRAWN	BY	CHKD	APVD	Switchcraft [®]	
					2/12/20	TJK	TJK	TJK		
					NAME TT PATCH CORD				PART No.	
					3 CONDUCTOR, TWIN				TT160-TT170_SERIES	
					DO NOT SCALE DRAWING				REV	
									E	

REV	ECO NUMBER	DATE	BY	APVD
E	19703	2/12/20	TJK	TJK