
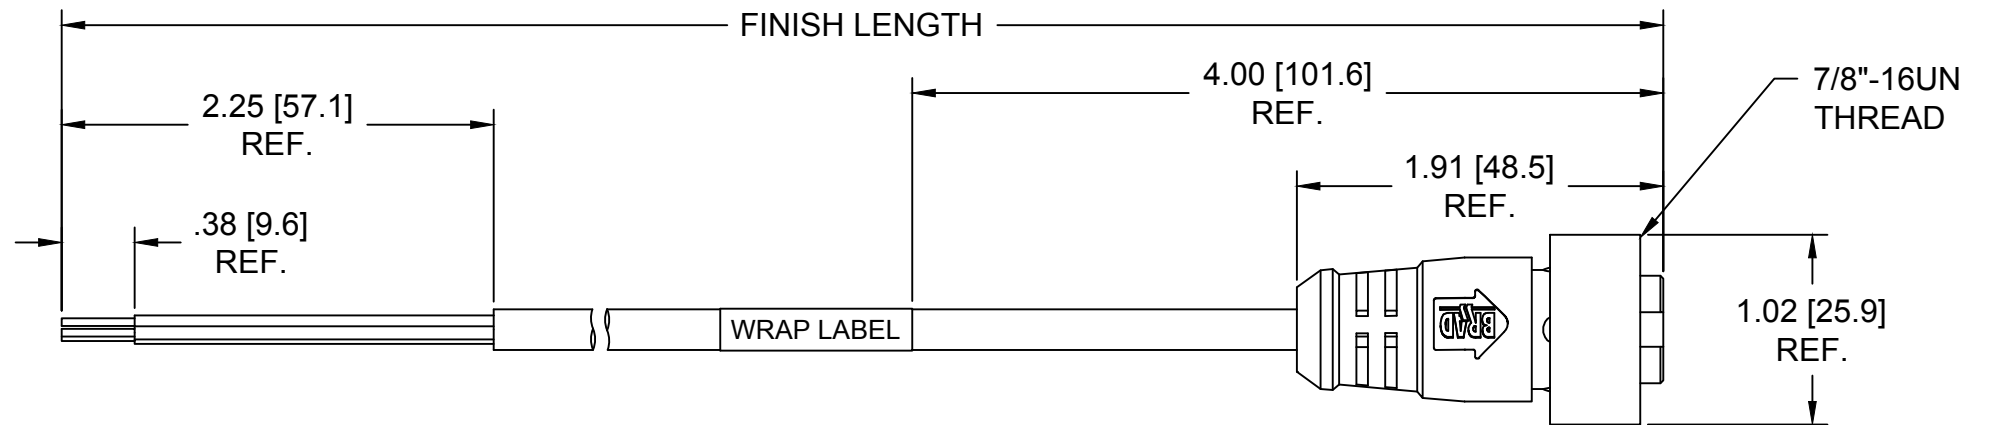


FACE VIEW-FEMALE INSERT

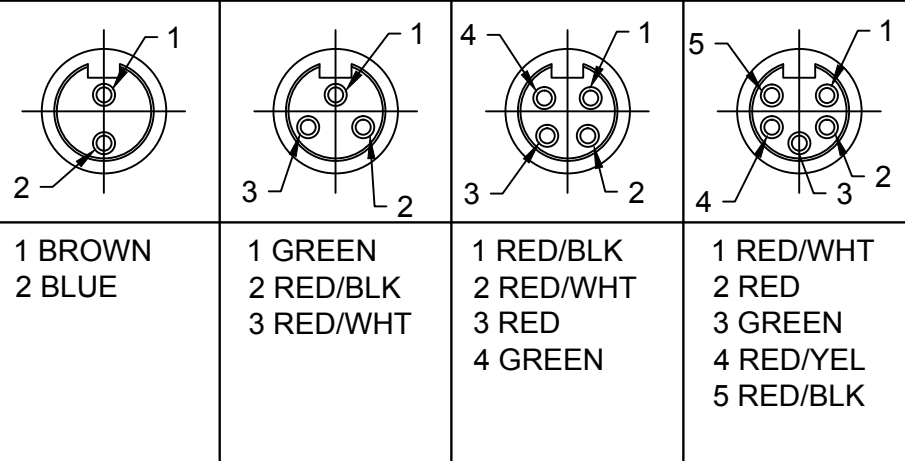

10X000A03XXXXX

| POLES | LENGTH          | COUPLING NUT                    |
|-------|-----------------|---------------------------------|
| 2     | M010 - 1 METER  | 1 - SS STR.                     |
| 3     | M100 - 10 METER | 2 - N-M                         |
| 4     | F060 - 6 FEET   | 3 - NB                          |
| 5     | F600 - 60 FEET  | 8 - SS HEX<br>BLANK - ZINC STR. |

SPECIFICATIONS

MATERIALS:

COUPLING NUT: SEE CHART  
 CONTACTS: COPPER ALLOY, GOLD PLATED  
 INSERT: PVC, YELLOW  
 OVERMOLD: PVC, YELLOW  
 CABLE: 18AWG YELLOW PVC, 2-5 CONDUCTORS DEPENDENT ON POLE COUNT

ELECTRICAL:

CURRENT RATING: 10A (2P & 3P), 7A (4P), 5.6A (5P)  
 VOLTAGE: 300V

MECHANICAL:

TEMPERATURE RATING: -20°C TO 105°C  
 PROTECTION: IP67 (IN FULLY MATED POSITION)

|  |                    |  |                                       |   |                 |                   |   |              |                        |  |  |  |
|--|--------------------|--|---------------------------------------|---|-----------------|-------------------|---|--------------|------------------------|--|--|--|
| INITIAL RELEASE<br>EC NO: IPG2015-0104<br>DRWN: BARDEN 2014/07/17<br>CHKD: BRUPERT 2014/07/18<br>APPR: JFMURPHY 2014/08/02 | DESCRIPTION<br>REV | QUALITY SYMBOLS  | GENERAL TOLERANCES (UNLESS SPECIFIED) |   | DIMENSION STYLE |                   | SCALE   | DESIGN UNITS | THIRD ANGLE PROJECTION |  |  |  |
|  |                    | ▼=0<br>▽=0   | mm                                    | INCH  | IN/MM           | NTS               | INCH  |              |                        |  |  |  |
|  |                    | 4 PLACES ±--- ±---<br>3 PLACES ±--- ±.005<br>2 PLACES ±0.13 ±.010<br>1 PLACE ±0.25 ±.020 | ANGULAR ±1/2°                         |   | DRAWN BY DATE   | TITLE             |   |              |                        |  |  |  |
|  |                    | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS                                     |                                       | SEE CHART   |                 | BARDEN 2014/07/17 | MINI-CHANGE ASSEMBLY<br>2-5P FE STRAIGHT<br>18AWG CABLE |              |                        |  |  |  |
| A  |                    | B  |                                       | MATERIAL NO.  |                 | DOCUMENT NO.      |   | SHEET NO.    |                        |  |  |  |
|  |                    |  |                                       | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                 | SD-130006-070     |   | 1 OF 1       |                        |  |  |  |