


POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH (mm)
8	1200705209	8R8J26E02C3003	300 ±10
8	1200705243	8R8J26E02M0203	200 ±10

CONNECTOR SPECIFICATION:

VOLTAGE RATING	30VAC/36VDC
AMPERAGE RATING	2A
PROTECTION	IP68
OPERATING TEMPERATURE	-25°C TO +90°C
UL CERTIFICATION	FILE NO. E152210
CSA CERTIFICATION	FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
5	O-RING	VITON (NBR)	BLACK
4	RECEPTACLE SHELLS	BRASS	NICKEL PLATED
3	CONTACT SOCKET	F.C.BRASS ASTM B16	GOLD OVER NICKEL
2	INSERT	NYLON 6/6	-
1	8 x 0.25 CONDUCT. 300V	PVC	-

MALE FACE VIEW

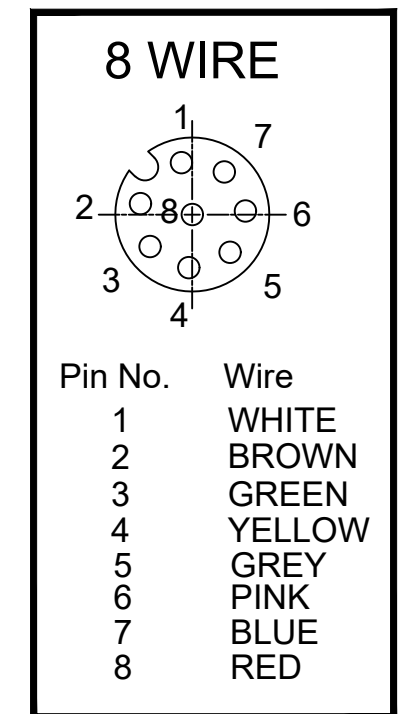

SYMBOLS ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: ADDED NEW PIN				
	DIMENSION UNITS: MM SCALE: 2:1	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 623197 DRWN: MDHARMANTI 2019/08/28 CHK'D: RSILLER 2019/08/28 APPR: RSILLER 2019/08/28		MMC-8P-M-REC-PG9-XM PVC 0.25 WIRE	
	4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±--- ±--- 1 PLACE ±0.3 ±---	mm INCH ±--- ±--- ±--- ±--- ±--- ±---	INITIAL REVISION: DRWN: LSTEMMLE 2010/03/01 APPR: NSTAUDIG 2010/03/03			PRODUCT CUSTOMER DRAWING	
	ANGULAR TOL ± --- ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING: A3-SIZE SERIES: 120070	MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET		DOCUMENT NUMBER: SD-120070-021 DOC TYPE: PSD DOC PART: 001 REVISION: A SHEET NUMBER: 1 OF 1	