



VIEW OF LOADED TAPE AND REEL

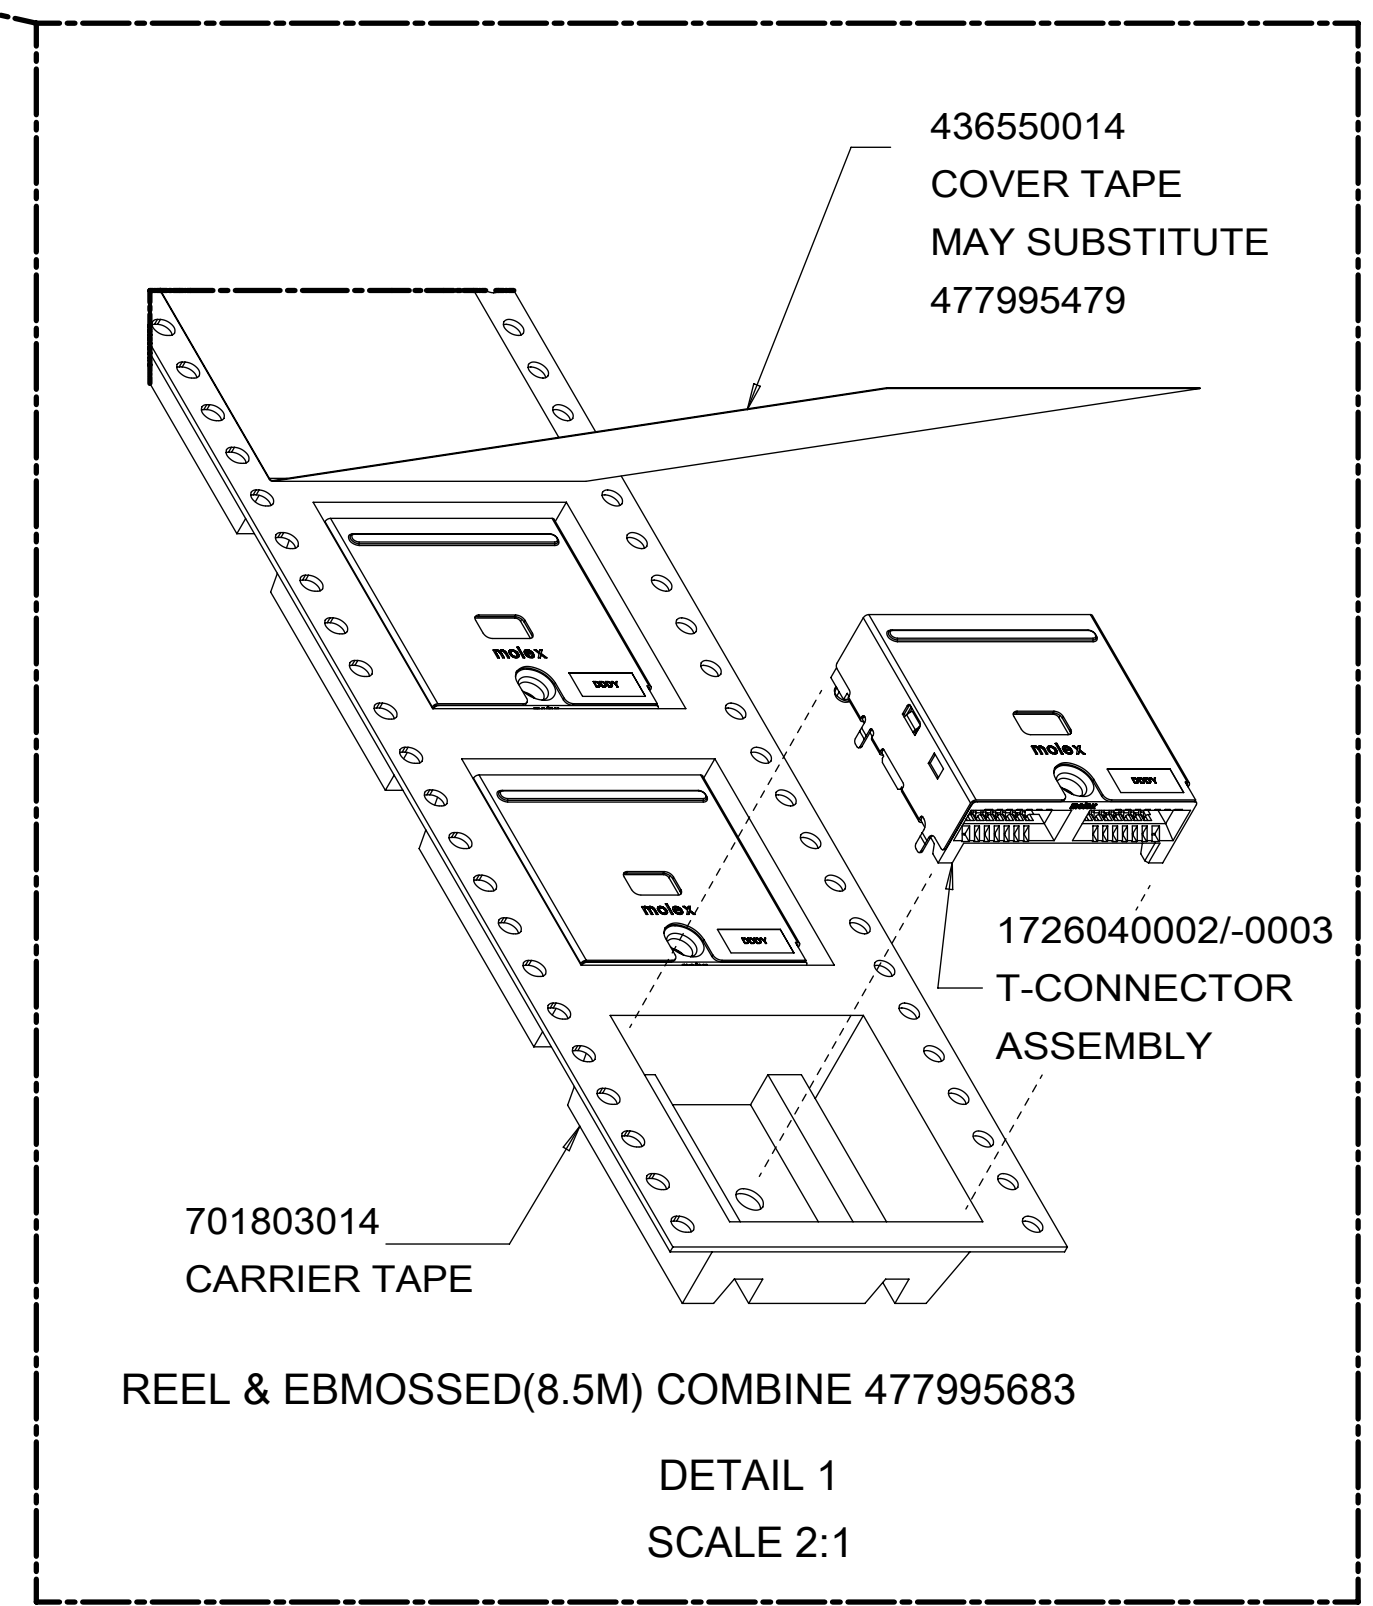

- NOTES:
- PACKAGING MATERIALS -
 - REELS: 330mm DIA. HIGH IMPACT POLYSTYRENE (HIPS) COLOR: BLACK OR WHITE
 - CARRIER TAPE: 32mm WIDE X 24mm PITCH POLYSYRENE (PS) COLOR: BLACK OR TRANSPARENT
 - COVER TAPE: 0.05mm THICK, 26.0mm WIDE POLYETHELYNE TEREPHTHALATE (PET) COLOR: TRANSPARENT
 - PADS: LOW DENSITY ANTISTATIC MICROFOAM COLOR: PINK
 - COVER TAPE PEEL STRENGTH TO BE 10-65 GRAMS PER SIDE WHEN PULLED IN THE OPPOSITE DIRECTION OF THE CARRIER TAPE.
 - REEL ASSEMBLY -
 - LEADER: 5 EMPTY POCKETS MIN.
 - COVER TAPE TO EXTEND 300mm BEYOND LEADER
 - NO SPLICES PERMITTED
 - 300 CONNECTORS PER REEL
 - CARTON SPQ: 1200 CONNECTORS (4 REELS)

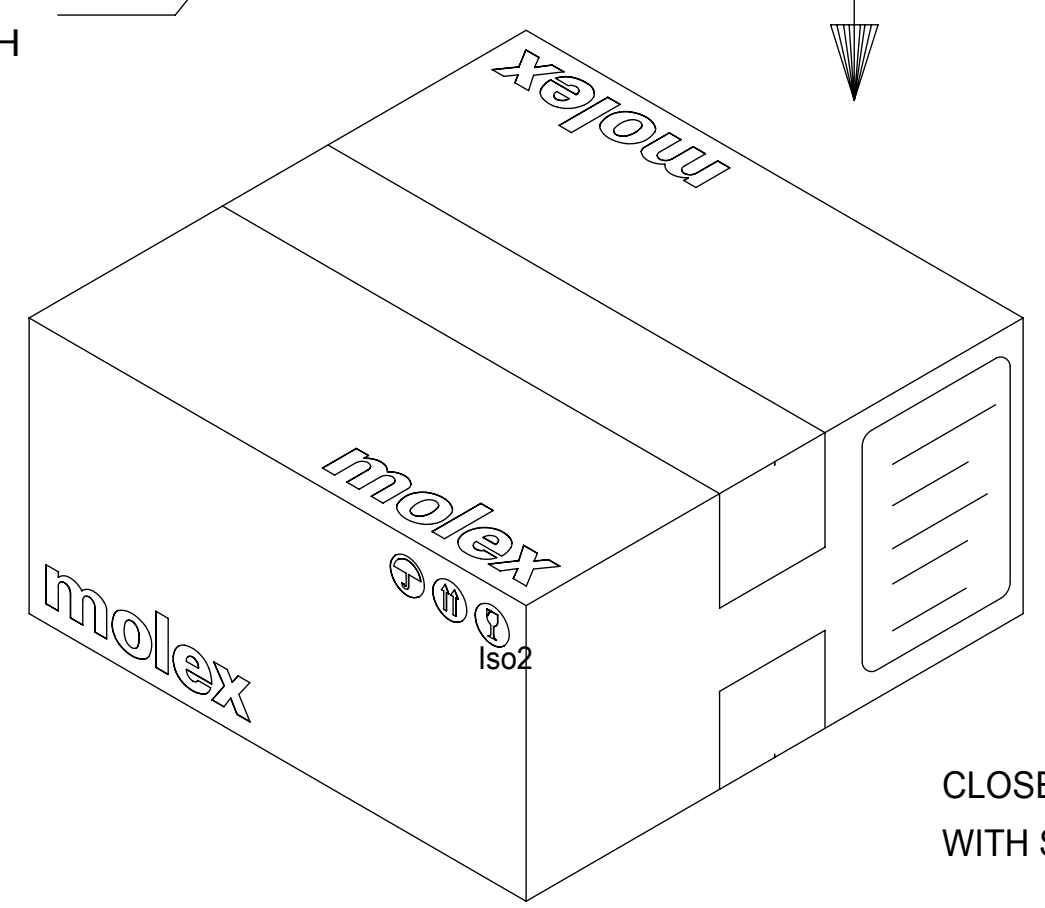

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
EC NO: 169684 DRWN: YHPAN CHKD: CCTEH REV APPR: MWOLFE	2017/12/16	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE							
	2018/01/10	ANGULAR TOL ± °		mm	NTS							
	2018/01/12	4 PLACES ±		DRWN BY	DATE							
	A		3 PLACES ±		BWIRKUS 2015/01/16		PACKAGING SPECIFICATION TAPE AND REEL INTEL T-CONNECTOR					
			2 PLACES ±		CHKD BY DATE							
			1 PLACE ±		BWIRKUS 2015/01/16		PACKAGING DESIGN DRAWING					
		0 PLACES ±		APPR BY DATE								
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		BWIRKUS 2016/07/29		SERIES						
DRAWING SIZE		THIRD ANGLE PROJECTION		D		172604	GENERAL MARKET					
DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER						
PK-172604-9001		PDD		001		1 OF 1						