

- **Rated to 464°F**
- **For High Temp - Low Voltage Applications**
- **Cut and Abrasion Resistant**
- **UL Recognized: VW-1**
- **Easy to Install - Cuts with Scissors**
- **Excellent Low Temp Flexibility**
- **Resists Most Organic Solvents**


## Heat Treated, Fray-Resistant Fiberglass Sleeving

Techflex INSULTHERM TRU-FIT (FGL) is a braided fiberglass sleeving which has been heat treated and impregnated with an acrylic binder to reduce fraying and dusting, and improve usability and performance. FGL is engineered for applications where temperatures as high as 1,200°F may occur. FGL is used as primary insulation on low voltage applications such as leads in toasters, coffee makers, ranges, and other small appliances. FGL may also be used as insulation and protection for small heaters and resistors that operate at high temperatures, as well as to insulate over soldered connections when exposure to solder melt temperatures is possible.

Insultherm Tru-Fit provides a sturdy, long lasting, and inexpensive insulation solution. It is flexible and expandable, and can easily be installed over applications with irregular shapes and tight turns. Standard colors are Black and Natural, but other colors are available by special order. Contact your account representative for details.



Protect component wiring leads from heat and abrasion with Insultherm Tru-Fit for an attractive and permanent finish.

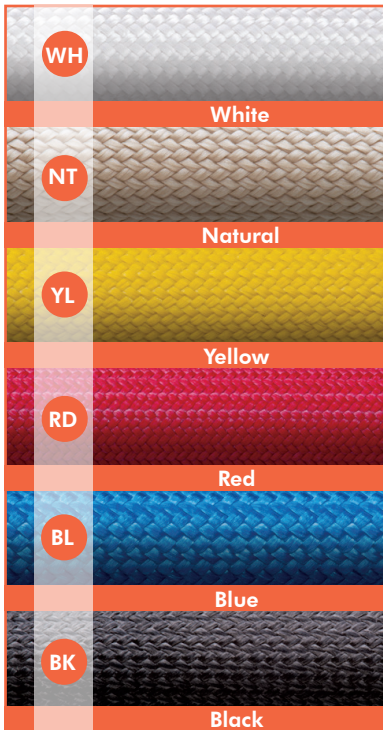

Nominal Size	Diameter	Part #	Wall Thickness	Standard Spool Put-Ups		Available Colors	Lbs/100'
				Bulk Spool	Shop Spool		
24	0.022"	FGLG.24	.006"	500'	250'	WH,NT, YL,RD,BL,BK	0.078
22	0.027"	FGLG.22	.006"	500'	250'	WH,NT, YL,RD,BL,BK	0.120
20	0.034"	FGLG.20	.006"	500'	250'	WH,NT, YL,RD,BL,BK	0.120
18	0.042"	FGLG.18	.006"	500'	250'	WH,NT, YL,RD,BL,BK	0.116
16	0.053"	FGLG.16	.006"	500'	250'	WH,NT, YL,RD,BL,BK	0.166
14	0.066"	FGLG.14	.006"	500'	250'	WH,NT, YL,RD,BL,BK	0.280
12	0.085"	FGLG.12	.006"	250'	100'	WH,NT, YL,RD,BL,BK	0.296
11	0.095"	FGLG.11	.008"	250'	100'	WH,NT, YL,RD,BL,BK	0.384
10	0.106"	FGLG.10	.008"	250'	100'	WH,NT, YL,RD,BL,BK	0.348
9	0.118"	FGLG.09	.008"	250'	100'	WH,NT, YL,RD,BL,BK	0.384
8	0.133"	FGLG.08	.008"	250'	100'	WH,NT, YL,RD,BL,BK	0.296
7	0.148"	FGLG.07	.008"	250'	100'	WH,NT, YL,RD,BL,BK	0.480
6	0.166"	FGLG.06	.010"	250'	100'	WH,NT, YL,RD,BL,BK	0.480
5	0.186"	FGLG.05	.010"	250'	100'	WH,NT, YL,RD,BL,BK	0.532
4	0.208"	FGLG.04	.010"	250'	100'	WH,NT, YL,RD,BL,BK	0.632
3	0.234"	FGLG.03	.010"	250'	100'	WH,NT, YL,RD,BL,BK	0.852
2	0.263"	FGLG.02	.010"	250'	100'	WH,NT, YL,RD,BL,BK	1.020
1	0.294"	FGLG.01	.010"	100'	50'	WH,NT, YL,RD,BL,BK	1.180
0	0.330"	FGLG.00	.016"	100'	50'	WH,NT, YL,RD,BL,BK	1.780
3/8"	0.375"	FGL0.38	.016"	100'	50'	WH,NT, YL,RD,BL,BK	1.790
7/16"	0.438"	FGL0.44	.016"	100'	50'	WH,NT, YL,RD,BL,BK	2.040
1/2"	0.500"	FGL0.50	.016"	100'	50'	WH,NT, YL,RD,BL,BK	2.280
5/8"	0.625"	FGL0.63	.016"	100'	50'	WH,NT, YL,RD,BL,BK	2.560
3/4"	0.750"	FGL0.75	.016"	100'	50'	WH,NT, YL,RD,BL,BK	4.160
1"	1.000"	FGL1.00	.016"	100'	50'	WH,NT, YL,RD,BL,BK	6.110