

# C3225C0G3A682J200AE

TDK Item Description : C3225C0G3A682JT\*\*\*S



## Application & Main Feature

Commercial Grade ( Soft Termination )

## Series

C3225 [EIA 1210]



## Dimensions

L	3.20mm +0.5,-0.4mm
W	2.50mm ±0.30mm
T	2.00mm +0.3,-0.2mm
B	0.20mm Min.
G	

## Temperature Characteristic

C0G (-55 to 125 degC 0+/-30ppm/degC)

## Rated Voltage

3A(1000Vdc)

## Capacitance

6.8nF

## Capacitance Tolerance

J (±5%)

## Q Factor

1000 Min.


## Insulation Resistance

10Gohm Min


## AEC-Q200

Not Applicable


## |Z|, ESR vs. Freq. Characteristics (Simulation Data)

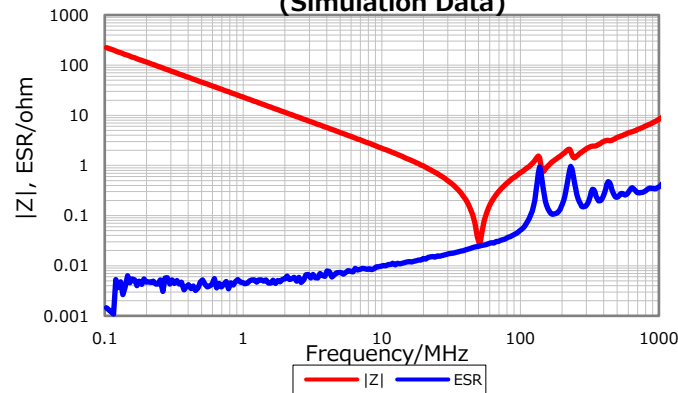

## Cap. vs. Freq. Characteristic

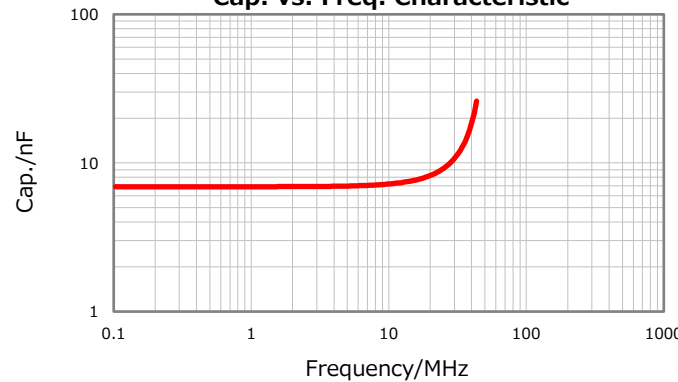


## DC Bias Characteristic

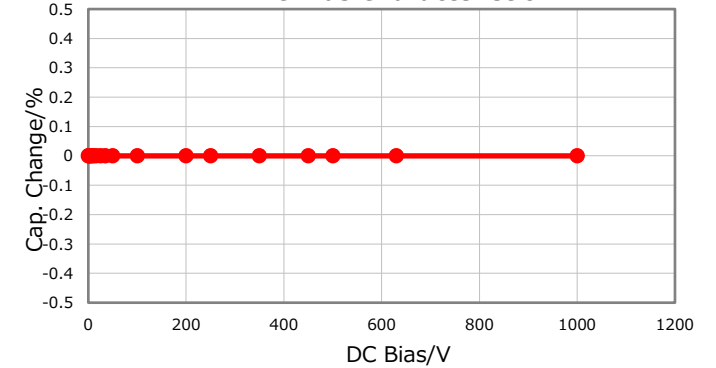

## Temperature Characteristics



## Ripple Temperature Rise Characteristics

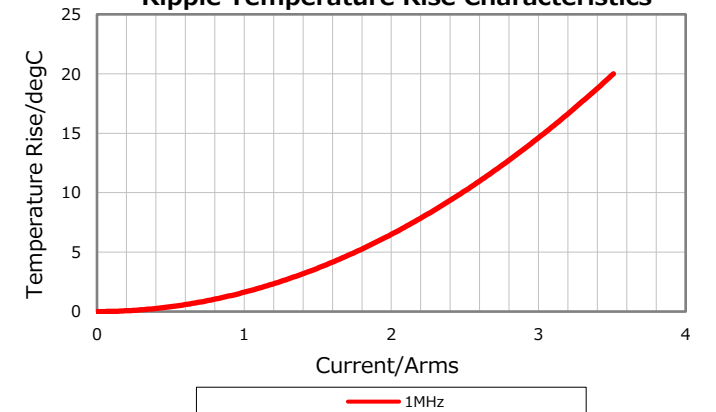

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

June 24, 2019