

SUMMARY

Wires

Low voltage 16



Image is for illustrative purpose only

Series 2P
Termination type Male crimp
IP rating 50
AWG wire size 30.00 - 22.00
Cable Ø 3.20 - 5.20 mm
Status active
Matching parts [CKB.M16.NYMN](#)

Download

[Request a quote](#)

[Eplan](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model CA*: Straight plug with cable collet
Keying No keying
Housing Material PSU (Polysulfone), black
Weight 10.16 g

Performance

Configuration 2P.M16 : 16 Low V.
Insulator Y: PEEK for crimp contacts
Rated Current 6 Amps

Specifications

Test voltage (kV rms) Contact-contact: 1.5
Air clearance min.: 0.8 mm
Creepage distance min.: 0.8 mm


Others

Endurance (Shell): >1000 mating cycles
Temp (min / max): -50°C / +150°C
F ret (min): 150 N

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

F ret (max): 250 N
Steam sterilization: 20 times (with potting on rear connection)

DRAWINGS

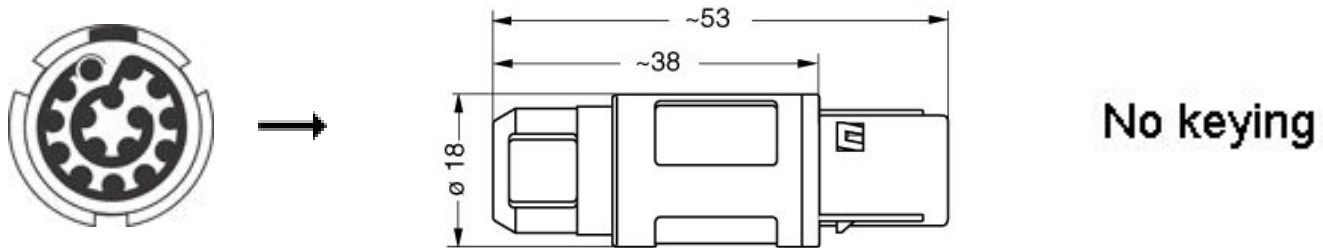

RECOMMENDED BY LEMO

Tools

Crimp Tool: [DPC.91.701.V](#)
Crimp settings: AWG/Selector = 22-24-26/6-5-5
Positionner: [DCE.91.072.BVC](#)
Extractor: [DCC.07.04B.LAG](#)
Replacement contact: FGG.2B.555.ZZC

Cables

CMN.16.T30.047QGZE	TPR (medical)	Grey	
16050	PVC	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.