


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/11/06	

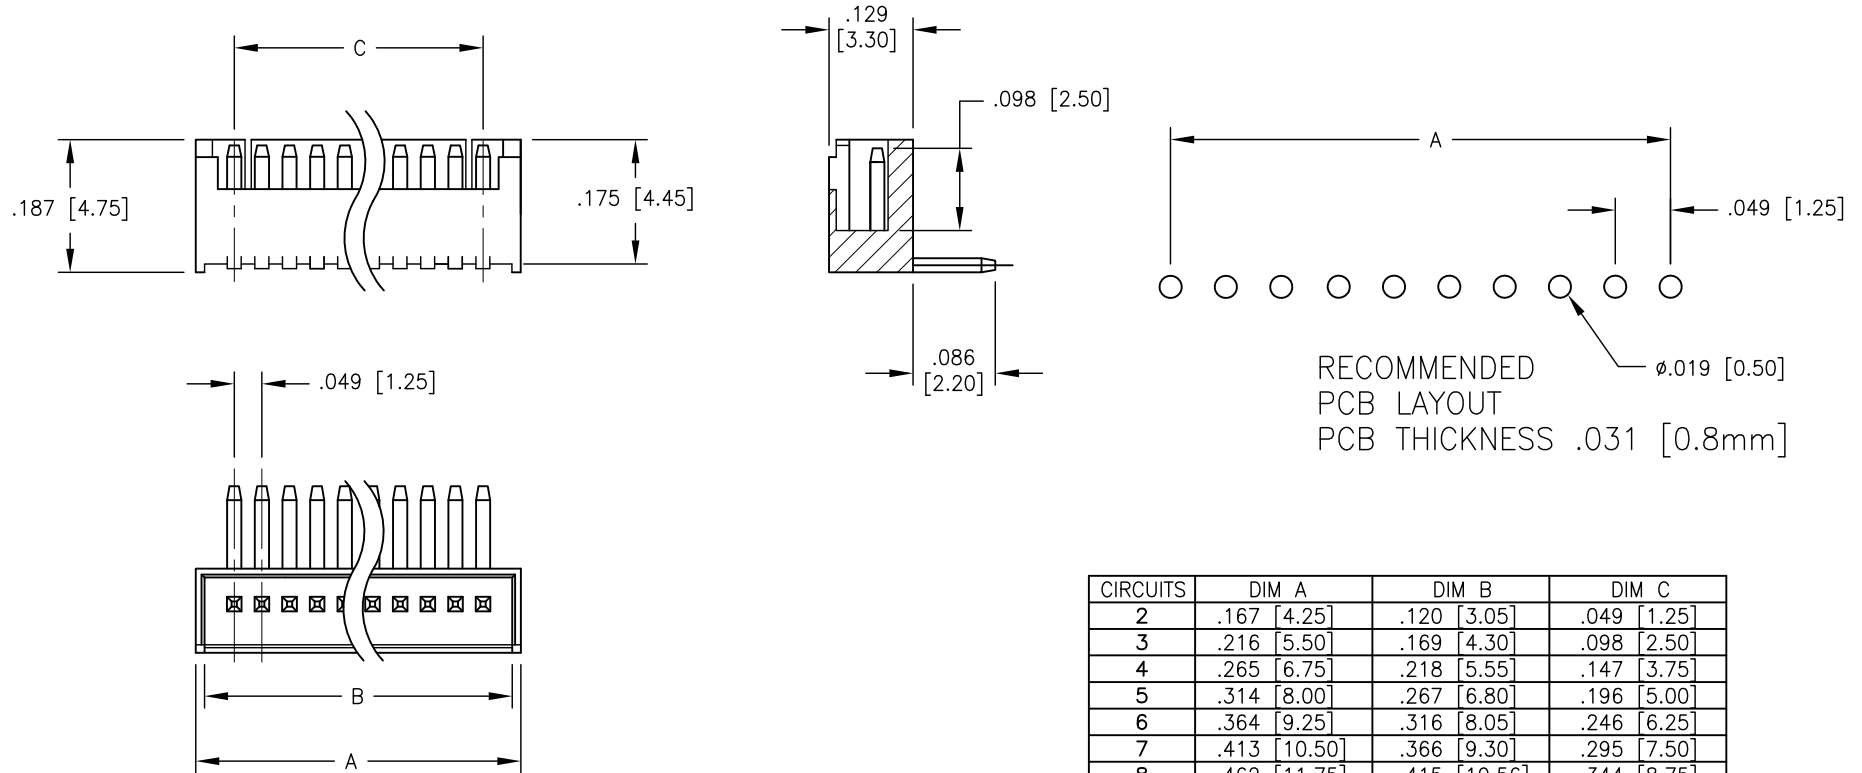

CIRCUITS	DIM A	DIM B	DIM C
2	.167 [4.25]	.120 [3.05]	.049 [1.25]
3	.216 [5.50]	.169 [4.30]	.098 [2.50]
4	.265 [6.75]	.218 [5.55]	.147 [3.75]
5	.314 [8.00]	.267 [6.80]	.196 [5.00]
6	.364 [9.25]	.316 [8.05]	.246 [6.25]
7	.413 [10.50]	.366 [9.30]	.295 [7.50]
8	.462 [11.75]	.415 [10.56]	.344 [8.75]
9	.511 [13.00]	.464 [11.80]	.393 [10.00]
10	.561 [14.25]	.513 [13.05]	.442 [11.25]
11	.610 [15.50]	.562 [14.30]	.492 [12.50]
12	.659 [16.75]	.612 [15.55]	.541 [13.75]
13	.708 [18.00]	.661 [16.80]	.590 [15.00]
14	.757 [19.25]	.710 [18.05]	.639 [16.25]
15	.807 [20.50]	.759 [19.30]	.688 [17.50]

**SPECIFICATIONS:**

Material:  
 Insulator: Nylon 46, rated UL 94V-0  
 Insulator color: White  
 Contacts: Brass

**Plating:**  
 Tin over Nickel underplate overall

**Electrical:**  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 500 Mohms min  
 Dielectric withstanding voltage: 500 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -25°C to +85°C

Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MILLIMETERS  
 TOLERANCES: EXCEPT AS NOTED

.X ± .30  
 .XX ± .20

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
 1.25mm WAFER  
 DIP RIGHT ANGLE

APPROVALS		DATE
DRAWN	BW	12/11/06
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	125SH-A-XX-TR	A
REF:	SCALE: NTS	SHEET 1 OF 1