



25 W

1 - 12.4GHz


SMA

DC-BLOCK

issue
17. feb. 95

Page
1 / 1

DRAWING

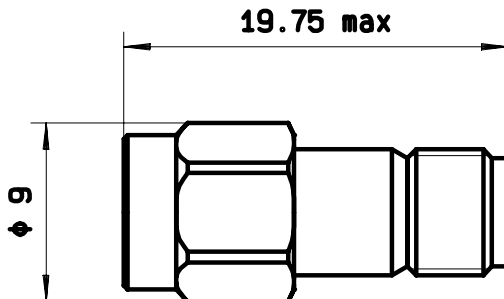

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : 1 - 12.4 GHz
 IMPEDANCE : 50 Ohms

FREQUENCY	1 - 4 GHz	4 - 12.4GHz
V.S.W.R	<= 1.10	<= 1.25
INSERTION LOSS	<= 0.25 dB	<= 0.5 dB


MAIN LINE MAXIMUM DC VOLTAGE : 250 V
 TYPICAL CAPACITANCE : 100 pF
 AVERAGE POWER at 25°C : 25 W

MECHANICAL CHARACTERISTICS

CONNECTORS : SMA male/female per MIL-C 39012
 WEIGHT : < 5 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -40 , +85
 STORAGE TEMPERATURE RANGE (°C) : -40 , +85

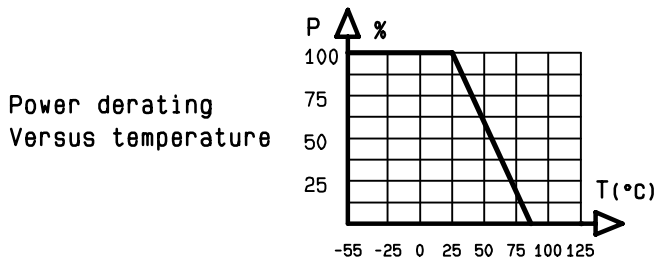

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

4112-9212

CREATION					
N° :					
PEN/EP: CAT					
Name: TB					
Date: 17. feb. 95					
APP.: VE					
ISSUE		REVISIONS		NAME	APPR.

RADIALL®

101. rue P. Hoffmann - Z.I Ouest-
 93116 ROSNY/BOIS Cedex-FRANCE
 Phone: 33(1)49353535
 Fax : 33(1)48546363
 Tlx RADIA 235220F