
T Q			0	₽ >	
Z					
			LAYOUT SHOWN AS EXA	MPLE	
	Keying Shown as example				
CHARACTERISTICS		-			
-Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal	-			
	ØS 25 Max Z 31 Max		SOURIAU shall not be liable for any n	on-conformity or damage	
-Shell Plating : Black Zinc Nickel	VV THREAD M15x1-6g		due to a use of the Products which	h does not comply with	
-Insulator : Thermoplastic		—	the Specifications issued by either of th (professional recommendation		
-Contacts : Copper Alloy					
-Seals & Grommet : Silicon Elastomer			Country	Jurisdiction & Control List	
-Contact Plating : Gold over copper Alloy 0.8µm minimum		Γ	FR	Not Listed	
-Durability : 500 Mating cycles			PN: 8D511Z0	2DFI	
-Delivered without Souriau contacts				21 LL	
-Temperature Range : -65°C to +175°C		A 18-10-2016	First Release		
-Salt Spray : 500 hours					
-Mass : 13.99 g ± 10%		ISS DATE Designed By:	Latest modification - by Date:	CUSTOMER DRAWING	MOD N°
		TITLE			
BASIC SERIES: 8D 5 - 11 Z 0	2 P E L	SCALE	General linear Tolerances:	NPRDS / PROJECT	
SHELL TYPE : Plug with RFI Shielding	Delivered V	V/O Contacts NA		859	ortu of
CONTACT TYPE : Standard Crimp Contact	ORI		WWW.SOURIAU.CO	This document is the prop SOURIAU	
SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings)				it must not be reproduce communicated without per	
PLATING : Z = Black Zinc Nickel	LCONTACT LA		SOURIAU E		SHEET
		A3	8D511Z02		1/2
			X11511707		1/2

r	Ŧ	ര	т	m	D	0	
		Contact Layout					
4	. x. .0 (2.	+Y IB IA + + + + + + + + + + + + +					
	Cont positi ID A B Shell Arrangement size no. 11 -2	X-axis Y-axis (mm) (mm) + .095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00)					
ယ							
	+					SOURIAU shall not be liable fo due to a use of the Product the Specifications issued by eithe (professional recommen	ts w
N						PN: 8D51	
					A 18-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
<u> </u>					TITLE SCALE NA	Alun General line Tolerances ±	ear
					SOURIA		J.(
					FORMAT A3	SOURIA 8D511	λι Ζ
L	Н	G	F	E	D	С	

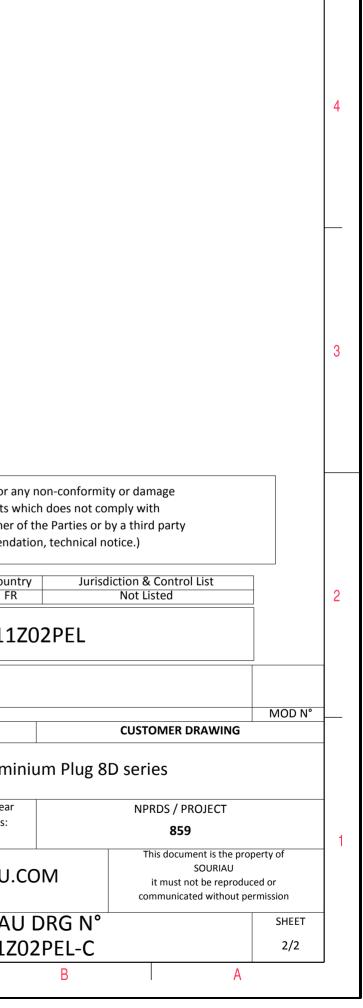

 \triangleright

σ