



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REV.	DESCRIPTION	REVISIONS	DATE	APPROVED
A1	NEW RELEASE		3/02/2013	
A1	Change Threaded.		12/5/2014	
A2	ADD LENGTH 1.5FT.		12/AUG/2015	
A3	ADD LENGTH 1FT.		26/AUG/2015	
A4	Added ACD P/N to the table.		08/Oct/2019	

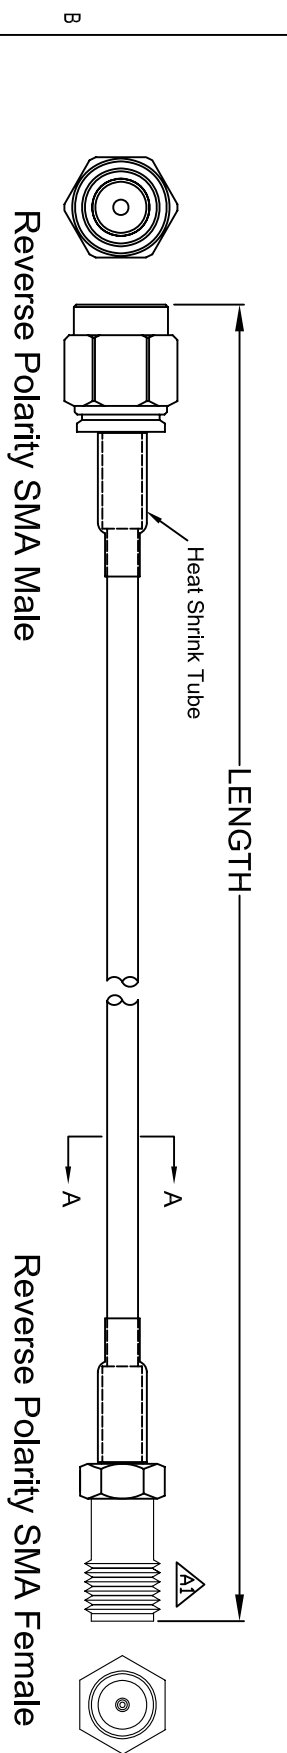

LENGTH Table

LENGTH	CUSTOMER P/N
1FT(305±20mm)	CO-058SMAMFFRP-001
1.5FT(457±20mm)	CO-058SMAMFFRP-001.5
3FT(914±30mm)	CO-058SMAMFFRP-003
6FT(1829±40mm)	CO-058SMAMFFRP-006
10FT(3048±40mm)	CO-058SMAMFFRP-010
15FT(4572±50mm)	CO-058SMAMFFRP-015
25FT(7620±100mm)	CO-058SMAMFFRP-025



- NOTES:**
1. CABLE: 120AWG(19/0.18±0.008mm)*1C+AL/MYLAR +BRAID(16*8/0.12±0.008mm) TINNED COPPER INSULATION: PE OD= 2.95±0.10mm COLOR: TRANSPARENT JACKET: HALF MATTTE PVC LOW TOXIC; OD=Ø5.0±0.15mm COLOR: UL813 BLACK
 2. MARKING: RG58C/U COAXIAL CABLE 50 OHM RoHS
 3. CONNECTOR: Reverse Polarity SMA Male GOLD-PLATING Reverse Polarity SMA Female GOLD-PLATING
 4. CONDUCTOR RESISTANCE $\leq 36.7\Omega/\text{km}$
 5. INSULATION RESISTANCE $\geq 2M\Omega$ DC300V 0.01Sec
- ALL MATERIALS SHOULD ACCORD WITH RoHS STANDARD.

PIN OUT:

CENTER	CENTER
SHELL	SHELL



NOTES: UNLESS OTHERWISE SPECIFIED

DIMENSIONS SPECIFIED UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EQR NO.		Amphenol Cables on Demand	
DECIMALS	±.XX	DRAWN	DATE	20 VALLEY ST. ENDCOTT, NY 13760	
ANGLES	±.X°	CHECKED		RG58C/U RP SMA M/RP SMA F	
XXX	±.XXX	BA	26/AUG/2015	SIZE	FIG. NO.
THIRD ANGLE PROJECTION		RESP ENG		A	CO-058SMAMFFRP-XXX
MFG ENG				SCALE	SHEET
					OF